

**Amphenol**  
MILITARY & AEROSPACE



# HERMETIC SOLUTIONS

Amphenol Military & Aerospace Hermetic Products

# AMAO HERMETIC SOLUTIONS

Hermetic connectors are essential to maintain system integrity in applications where the reliability and performance of electrical connectors are critical, such as gas-tight barriers or areas with high-pressure differentials.

Amphenol Military Aerospace Operations (AMAO) uses a wide range of materials and manufacturing capabilities to provide standard and custom products for glass-to-metal seals and lightweight epoxy backfilled solutions.

Hermetic seals can be supplied in multi-pin preforms or, for high pressure applications (up to 90,000 psi), in individual glass beads.

Such seals can be manufactured using a range of alternative shell and pin materials including; stainless steel, aluminum, titanium, inconel, thermocouple materials, molybdenum, and more. AMAO also offers high speed hermetics with capabilities to manufacture impedance-matched, glass-sealed, coax hermetic interconnects.

Quality programs include advanced mechanical and electrical inspections, as well as nondestructive testing and pressure testing. 100% leak testing can be carried out in house for fail-safe hermeticity. Customers can choose from our standard product range or bespoke concept-to-supply solutions.



## LIGHTWEIGHT ALTERNATIVE FOR SEALED CONNECTORS:

AMAO epoxy-sealed connectors are a lightweight alternative to glass-sealed hermetic connectors for use in avionics and other weight-sensitive applications where a high level of sealing is required. Epoxy-sealed connectors are an optimal solution when increasingly stringent sealing requirements must be met. See our online Filter Catalog for more information [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com).

## FEATURES AND BENEFITS:

- Same epoxy as used in EMI filter connectors
- Less than  $1 \times 10^{-5}$  cc of He/sec leak rate
- Maintained after temperature cycling, 5 cycles -55 to +125°C
- Custom designs available with lower leak rates upon request
- Aluminum shells with Electroless nickel plating standard
  - Also available in Durmalon and O.D. Cadmium finishes. Steel available upon request
- Accessory threads sized for standard backshells
- Intermateable & inter-mountable with standard 38999 Series III plugs
- Uses Amphenol's standard "Filter Epoxy Compound" - 50 years of proven reliability and experience

## MIL-SPEC-TYPE HERMETIC:

Amphenol glass sealed hermetic connectors are available in a wide variety of Mil-Spec configurations.

- Leakage rate of  $1 \times 10^{-7}$  cc of He/sec or less
- Fused glass insert in steel shell
- High volume manufacturing options

Amphenol maintains the following QPLs for hermetic products


- MIL – DTL 38999 Series I, II, III
- MIL – DTL 26482 Series I, II
- MIL – DTL 83723 Series III, Pyle
- Commercial 26500 Type (Threaded or Bayonet)
- All styles are also available in Non MIL – SPEC, Commercial options that will meet the MIL – SPEC requirements

|                                                                                      |           |                                                                  |           |
|--------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| Hermetic Capabilities                                                                | 3         | <b>SJT, How to Order, Alternate Rotations</b>                    | <b>40</b> |
| Hermetic Sealed Guide                                                                | 4         | SJTIY – Hermetic, Solder Mounting Receptacle                     | 41        |
|                                                                                      |           | SJT07Y – Hermetic, Jam Nut Receptacle                            | 41        |
| <b>Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV:</b>                          |           |                                                                  |           |
| Insert Availability and Identification Chart                                         | 5-6       | <b>Aquacon Series, Specifications, Alternate Positioning</b>     | <b>43</b> |
| Insert Arrangements                                                                  | 7-9       | Insert Availability                                              | 44        |
| Thermocouple Contacts/Sealing Plugs/Finishing Data                                   | 10        | Insert Arrangements                                              | 45-46     |
|                                                                                      |           | How to Order                                                     | 47        |
| <b>Hermetic MIL-DTL-38999, Series III TV</b>                                         | <b>11</b> | AJ7H / AS7H Hermetic Jam Nut Receptacle                          | 48        |
| Hermetic Military, How to Order                                                      | 12        | AJ0H Hermetic Square Flange Receptacle                           | 49        |
| How to Order (Commercial)                                                            | 13        | Installation Instructions, Application Tools                     | 50        |
| Hermetic Box Mounting Receptacle,<br>Military (D38999/21), Commercial (TVPS02)       | 14        | <b>2M Series Selection Table</b>                                 | <b>52</b> |
| Hermetic Jam Nut Receptacle,<br>Military (D38999/23), Commercial (TVS07)             | 15        | 2M801, 2M803, 2M804 and 2M805                                    | 52        |
| Hermetic Solder Mounting Receptacle,<br>Military (D38999/25), Commercial (TVSI)      | 16        | Insert Arrangements                                              | 53-55     |
| Hermetic Wall Mounting Receptacle,<br>Military (D38999/27), Commercial (TVSHIY)      | 16        | <b>2M805 Tri-Start Hermetic Receptacle</b>                       | <b>57</b> |
| PCB Hermetic Box Mounting Receptacle, Commercial                                     | 17        | Ordering Guide for 2M805-006                                     | 57        |
| PCB Hermetic Jam Nut Receptacle, Commercial                                          | 18        | 2M805 Tri-Start Flange Mount Hermetic, 2M805-006-02              | 58        |
| PCB Hermetic Solder Mounting Receptacle, Commercial                                  | 19        | 2M805 Tri-Start Solder Mount Hermetic, 2M805-006-03              | 59        |
| PCB Hermetic Weld Mounting Receptacle, Commercial                                    | 20        | 2M805 Tri-Start Jam Nut Hermetic, 2M805-006-07                   | 60        |
| <b>MIL-DTL-38999/27599, Series II JT</b>                                             | <b>21</b> | <b>2M804 Push-Pull Hermetic Receptacle</b>                       | <b>61</b> |
| Military to Commercial Shell Style Conversion Table,<br>How to Order (Military)      | 22        | Ordering Guide for 2M804-006                                     | 62        |
| How to Order (Commercial)                                                            | 23        | 2M804 Push-Pull Rear Panel Jam Nut Hermetic,<br>2M804-006-07     | 63        |
| Wall Mounting Receptacle,<br>Military (MS27475 & MS27482), Commercial (JT00 & JTS00) | 24        | 2M804 Front Panel Jam Nut Hermetic, 2M804-006-00                 | 64        |
| Box Mounting Receptacle,<br>Military (MS27476), Commercial (JT02 & JTS02)            | 24        | <b>2M803 Hermetic</b>                                            | <b>65</b> |
| Jam Nut Receptacle, Military (MS27477 & MS27483),<br>Commercial (JT07 & JTS07)       | 25        | Ordering Guide for 2M803-006 Receptacles                         | 66        |
| Solder Mounting Receptacle,<br>Military (MS27478 & MS27503), Commercial (JTI & JTSI) | 25        | 2M803 Hermetic, Flange Mount and Jam Nut<br>2M803-006-02 and -07 | 67        |
| PCB Wall Mounting Receptacle Hermetic, (JT00)                                        | 26        | <b>2M801 Hermetic</b>                                            | <b>68</b> |
| PCB Box Mounting Receptacle, Commercial JT02                                         | 27        | Ordering Guide for Hermetic Receptacle 2M801-012                 | 69        |
| PCB Jam Nut Receptacle, Commercial (JT07)                                            | 28        | 2M801 Hermetic, Jam Nut Connector 2M801-012-07                   | 70        |
| PCB Solder Mounting Receptacle, Commercial (JTI)                                     | 29        | Hermetic Square Flange Connector 2M801-012-02                    | 71        |
|                                                                                      |           | Hermetic Weld Mount Connector 2M801-012-03                       | 72        |
| <b>MIL-DTL-38999/ 27599, Series I LJT</b>                                            | <b>30</b> |                                                                  |           |
| Military to Commercial Shell Style Conversion Table,<br>How to Order (Military)      | 31        |                                                                  |           |
| How to Order (Commercial)                                                            | 32        |                                                                  |           |
| Wall Mounting Receptacle,<br>Military (MS27469), Commercial (LJT00)                  | 33        |                                                                  |           |
| Jam Nut Receptacle,<br>Military (MS27470) Commercial (LJT07 & LJTS07)                | 34        |                                                                  |           |
| Solder Mounting Receptacle,<br>Military (MS27471), Commercial (LJTI & LJTSI)         | 35        |                                                                  |           |
| PCB Hermetic Wall Mounting Receptacle, (LJT00)                                       | 36        |                                                                  |           |
| PCB Hermetic Jam Nut Receptacle                                                      | 37        |                                                                  |           |
| PCB Hermetic Solder Mounting Receptacle, (LJTI)                                      | 38        |                                                                  |           |

# Table of Contents

|                                                                    |               |
|--------------------------------------------------------------------|---------------|
| <b>MIL-DTL-83723, Series III, Pyle®</b>                            | <b>74</b>     |
| Manufacturer's Specifications                                      | 74            |
| Hermetic Receptacles - Quick Reference                             | 75-76         |
| Insert Availability and Identification, Alternate Keying Positions | 77            |
| Insert Arrangements                                                | 78            |
| How to Order – Hermetic, Military or Pyle Commercial               | 79            |
| Hermetic Square Flange Mount, Threaded Coupling                    | 80            |
| Military (MS83723/88), Commercial (BTY, BFY, BNY)                  | 80            |
| Hermetic Jam Nut (D-Hole Mount), Threaded Coupling                 | 81            |
| Military (MS83723/89), Commercial (BTY, BFY, BNY)                  | 81            |
| Hermetic Solder/Weld Mount Receptacle, Threaded Coupling           | 82            |
| Military (M83723/90), Commercial (BTY, BFY, BNY)                   | 82            |
| <br><b>Hermetic MIL-DTL-26482, Series I</b>                        | <br><b>83</b> |
| Insert Availability Chart                                          | 84            |
| Insert Arrangements                                                | 85            |
| Alternate Positioning                                              | 86            |
| Hermetic MIL-DTL-26482, Series I, How to Order                     | 87            |
| PTIH (MS3113H), Hermetic Solder Mounting Receptacle                | 88            |
| PT02H, Hermetic Solder Mounting Receptacle                         | 89            |
| PT07H (MS3114H), Hermetic Jam Nut Receptacle                       | 90            |
| Commercial 26500, Pyle, Insert Arrangements                        | 92            |
| Pyle ZZL/ZZB, MIL-DTL-26500 TYPE                                   | 93            |
| Hermetic (three styles), Threaded or Bayonet                       | 93            |



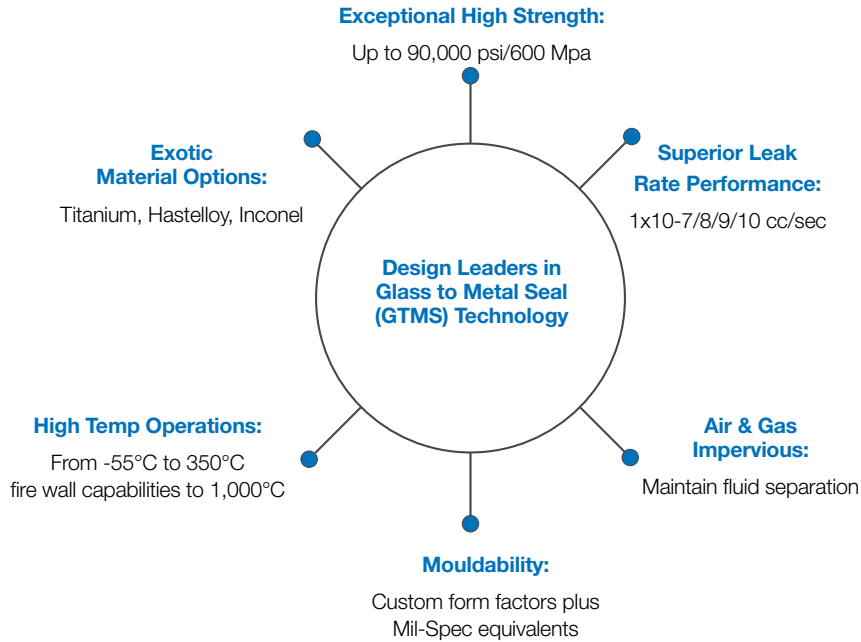

## Custom Design Options

### CUSTOM CONNECTORS

- Customise and add functionality to hermetic Mil-Spec connectors
- Exotic material selection



### VACUUM CONNECTORS

- Standard flange forms (e.g. CF : KF)
- Minimal trapped volumes




### GTMS FEED-THROUGH AND HEADERS

- Matched or Compression Seals
- Optimum, custom mounting arrangements for system integration



### RECTANGULAR HERMETICS

- Micro-D and D-Sub
- Other form factors



### COAXIAL HERMETIC

- Industry standard BNC, SMA, SMB & N type
- 0, 75 or 90 Ω and other impedance options



### FILTERED INTERCONNECTS

- EMI/RFI & lightning strike protection
- Space saving compact design solutions



### HIGH SPEED HERMETICS

- USB, ethernet & low resistivity contacts options
- Low insertion loss and reflection coefficients




### SUB-SEA INTERCONNECTS

- Pressure differentials up to 90,000psi
- Booted and over moulded custom designs



# Hermetic Sealed Guide

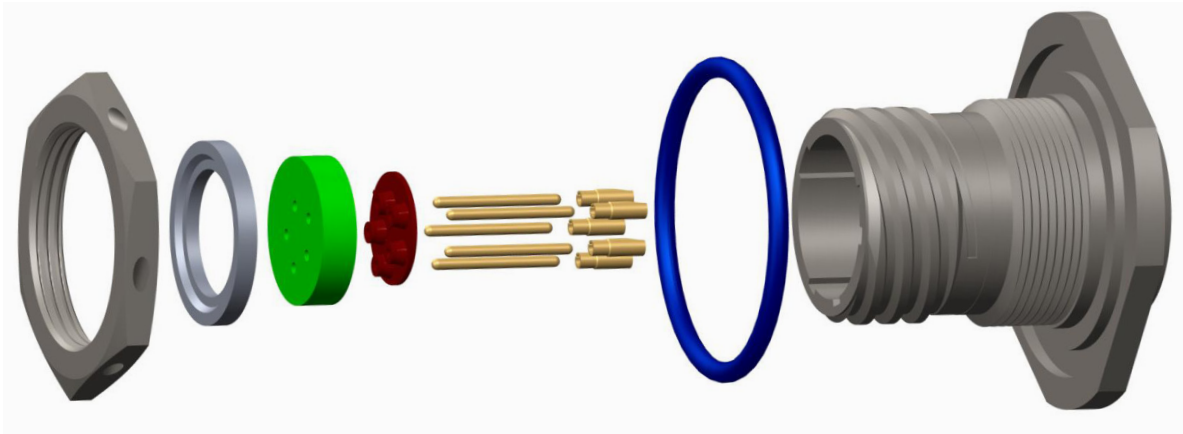

## TIPS FOR CUSTOMIZING HERMETICS:

### 1. How many Contacts?

Consider including a number of redundant contacts to accommodate any system developments you have planned for the future, or to comply with specified growth provisions.

### 2. What are the electrical requirements?

Work out a steady state and peak requirement for both the current and voltage.

### 3. Will your Glass-to-Metal Sealing be under any pressure?

Depending on the medium (for example, oil, water, or a vacuum) there may be a pressure differential to consider. Glass-to-Metal Sealing (GTMS) can be supplied in multi-pin preforms or, for high pressure applications in individual glass beads.

### 4. How will your GTMS be attached?

Will it be secured with a standard O-ring, for example, or welded in place?

### 5. What are your cable interface requirements?

Be sure to include any instructions for screen termination, potting requirements, and/or cable strain relief.

### 6. Do you require custom functionality?

If you have any specific requirements, such as electromagnetic compatibility (EMC) filters or printed circuit board (PCB) mounting, make sure they are included in your design specification.

### 7. What are your plating requirements?

We offer a wide range of in-house plating options, including tin, nickel, and hard and soft gold. We can also customize the plating to meet any special requirements. Note that gold-plated solder contacts should either be desoldered before installation, or appropriate plating thickness specified, to avoid solder embrittlement.

### 8. Are there any environmental factors?

If your application will be operating in a harsh or hostile environment (exposed to shock, vibration, thermal changes or extreme temperatures, for example) these will need to be factored into the design.

### 9. What are the qualification requirements?

If qualification tests are required, these should be discussed and specified during the design phase. We are able to perform most qualification tests on the appropriate levels of assembly.

### 10. What testing will you need?

Examples include leak testing, pressure testing, and geometrical and electrical testing; including breakdown, voltage, and insulation resistance of finished parts.

### Cabling and wiring too?

If you would like to extend your brief to include your cabling and wiring requirements, we can address those as well.

# Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV

## Insert Availability and Identification Chart

| Series       | Series       | Series        | Military   | Hermetic |         |     | Service Rating | Total Contacts |     |     |    |    |    |    |  |
|--------------|--------------|---------------|------------|----------|---------|-----|----------------|----------------|-----|-----|----|----|----|----|--|
|              |              |               |            | Class H  | Class Y | TV* |                |                | 22D | 22M | 22 | 20 | 16 | 12 |  |
| <b>JT II</b> | <b>LJT I</b> | <b>TV III</b> | <b>III</b> |          |         |     |                |                |     |     |    |    |    |    |  |
| 8-3■         |              |               |            | P        | P       |     | M              | 3              |     |     |    | 3  |    |    |  |
| 8-6          |              |               |            | P        | P       |     | M              | 6              |     | 6   |    |    |    |    |  |
| 8-35         |              |               |            | P        | P       |     | M              | 6              | 6   |     |    |    |    |    |  |
|              | 9-35         | 9-35          | A35        | P        | P       | P   | M              | 4              |     |     | 4  |    |    |    |  |
| 8-44         |              |               |            | P        | P       |     | M              | 4              |     |     |    |    |    |    |  |
| 8-98         |              |               |            | P        | P       |     | I              | 3              |     |     |    | 3  |    |    |  |
|              | 9-98         | 9-98          | A98        | P        | P       | P   | I              | 2              |     |     |    |    | 2  |    |  |
|              | 11-2★        | 11-2★         | B2         | P**      |         |     | I              | 4              |     |     |    |    |    |    |  |
| 10-4         |              |               |            |          |         |     | I              | 4              |     |     |    | 4  |    |    |  |
|              | 11-4         | 11-4          |            |          |         |     | I              | 5              |     |     |    | 5  |    |    |  |
| 10-5         |              |               |            | P        | P       |     | I              | 5              |     |     |    |    |    |    |  |
|              | 11-5         | 11-5          | B5         |          |         | P   | M              | 13             |     | 13  |    |    |    |    |  |
| 10-13        |              |               |            | P        | P       |     | M              | 13             | 13  |     |    |    |    |    |  |
|              | 11-13        |               |            | P        | P       |     | M              | 13             |     |     |    |    |    |    |  |
| 10-35        |              |               |            | P        | P       |     | M              | 13             |     |     |    |    |    |    |  |
|              | 11-35        | 11-35         | B35        | P        | P       | P   | I              | 6              |     |     |    | 6  |    |    |  |
| 10-98        |              |               |            | P        | P       |     | I              | 6              |     |     |    |    |    |    |  |
|              | 11-98        | 11-98         | B98        | P        | P       | P   | I              | 7              |     |     |    | 7  |    |    |  |
| 10-99        |              |               |            | P        | P       |     | I              | 7              |     |     |    |    |    |    |  |
|              | 11-99        | 11-99         | B99        |          |         | P   | II             | 3              |     |     |    |    | 3  |    |  |
| 12-3         |              |               |            | P        | P       |     | I              | 4              |     |     |    |    | 4  |    |  |
| 12-4         |              |               |            | P        | P       |     | I              | 8              |     |     |    | 8  |    |    |  |
|              | 13-4★        | 13-4★         | C4         | P        | P       | P   | M              | 22             |     | 22  |    |    |    |    |  |
| 12-8         |              |               |            | P        | P       |     | M              | 22             | 22  |     |    |    |    |    |  |
|              | 13-8         | 13-8          | C8         | P        | P       | P   | M              | 22             |     |     |    |    |    |    |  |
| 12-22        |              |               |            | P        | P       |     | M              | 22             | 22  |     |    |    |    |    |  |
|              | 13-22        |               |            | P        | P       |     | M              | 22             |     |     |    |    |    |    |  |
| 12-35        |              |               |            | P        | P       |     | M              | 22             |     |     |    |    |    |    |  |
|              | 13-35        | 13-35         | C35        | P        | P       | P   | I              | 10             |     |     |    | 10 |    |    |  |
| 12-98        |              |               |            | P        | P       |     | I              | 10             |     |     |    |    |    |    |  |
|              | 13-98        | 13-98         | C98        | P        | P       | P   | II             | 5              |     |     |    |    | 5  |    |  |
| 14-5         |              |               |            |          |         |     | I              | 15             |     |     |    | 14 | 1  |    |  |
|              | 15-5         |               |            | P        | P       |     | I              | 15             |     |     |    | 14 | 1  |    |  |
| 14-15        |              |               |            | P        | P       |     | I              | 18             |     |     |    | 18 |    |    |  |
|              | 15-15        | 15-15         | D15        | P        | P       | P   | I              | 19             |     |     |    | 19 |    |    |  |
| 14-18        |              |               |            | P        | P       |     | M              | 37             | 37  |     |    |    |    |    |  |
|              | 15-18        | 15-18         | D18        | P        | P       | P   | M              | 37             |     | 37  |    |    |    |    |  |
| 14-35        |              |               |            | P        | P       |     | M              | 37             |     |     |    |    |    |    |  |
|              | 15-35        | 15-35         | D35        | P        | P       | P   | I              | 8              |     |     |    |    |    | 6  |  |
| 14-37        |              |               |            | P        | P       |     | II             | 8              |     |     |    |    |    |    |  |
|              | 15-37        |               |            | P        | P       |     | I              | 12             |     |     |    | 8  | 4  |    |  |
| 14-68■       |              |               |            | P        | P       |     | I              | 12             |     |     |    |    |    |    |  |
| 14-97        |              |               |            | P        | P       |     | I              | 12             |     |     |    |    |    |    |  |
|              | 15-97        | 15-97         | D97        | P        | P       | P   | I              | 6              |     |     |    |    |    |    |  |
| 16-6         |              |               |            | P        | P       |     | I              | 6              |     |     |    |    |    |    |  |
|              | 17-6         | 17-6          | E6         | P        | P       | P   | II             | 8              |     |     |    |    |    |    |  |
| 16-8         |              |               |            | P        | P       |     | I              | 13             |     |     |    |    |    |    |  |
|              | 17-8★        | 17-8★         | E8         | P        | P       | P   | I              | 13             |     |     |    |    | 13 |    |  |
| 16-13        |              |               |            |          |         |     | I              | 26             |     |     |    | 26 |    |    |  |
|              | 17-13        |               |            |          |         |     | I              | 26             |     |     |    |    |    |    |  |
| 16-26        |              |               |            | P        | P       |     | M              | 55             | 55  |     |    |    |    |    |  |
|              | 17-26        | 17-26         | E26        | P        | P       | P   | M              | 55             |     | 55  |    |    |    |    |  |
| 16-35        |              |               |            | P        | P       |     | M              | 55             |     |     |    |    |    |    |  |
|              | 17-35        | 17-35         | E35        | P        | P       | P   | M              | 55             |     |     |    |    |    |    |  |
| 16-55        |              |               |            | P        | P       |     | M              | 55             |     |     |    |    |    |    |  |
|              | 17-55        |               |            | P        | P       |     | I              | 23             |     |     |    | 21 | 2  |    |  |
| 16-99        |              |               |            | P        | P       |     | II             | 11             |     |     |    |    |    |    |  |
|              | 17-99        | 17-99         | E99        | P        | P       | P   | I              | 32             |     |     |    | 32 |    |    |  |
| 18-11        |              |               |            | P        | P       |     | I              | 32             |     |     |    |    |    |    |  |
|              | 19-11★       | 19-11★        | F11        | P        | P       | P   | M              | 66             | 66  |     |    |    |    |    |  |
| 18-32        |              |               |            | P        | P       |     | M              | 66             |     | 66  |    |    |    |    |  |
|              | 19-32        | 19-32         | F32        | P        | P       | P   | M              | 66             |     |     |    |    |    |    |  |
| 18-35        |              |               |            | P        | P       |     | M              | 66             |     |     |    |    |    |    |  |
|              | 19-35        | 19-35         | F35        | P        | P       | P   | M              | 66             |     | 66  |    |    |    |    |  |
| 18-66        |              |               |            | P        | P       |     | M              | 66             |     |     |    |    |    |    |  |
|              | 19-66        |               |            | P        | P       |     |                |                |     |     |    |    |    |    |  |

P Available with Pin contacts only

■ Not Mil-Qualified.

\* Hermetic inserts - solder termination standard. (Contact Amphenol Aerospace for optional PCB or eyelet termination).

★ Ground plane proprietary option available.  
(2) Pin inserts only, not tooled for RP or 02RE  
(Consult Amphenol Aerospace for availability)

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

# Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV

## Insert Availability and Identification Chart

|  Series |  Series |  Series |  Military | Hermetic |         |     |                |                |     |     |    |    |    |    |  |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|----------|---------|-----|----------------|----------------|-----|-----|----|----|----|----|--|
| JT II                                                                                    | LJT I                                                                                    | TV III                                                                                   | III                                                                                        | Class H  | Class Y | TV* | Service Rating | Total Contacts | 22D | 22M | 22 | 20 | 16 | 12 |  |
| 20-1                                                                                     |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | M              | 79             |     | 79  |    |    |    |    |  |
|                                                                                          | 21-1                                                                                     |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
| 20-11                                                                                    |                                                                                          |                                                                                          |                                                                                            |          |         |     | I              | 11             |     |     |    |    |    | 11 |  |
|                                                                                          | 21-11★                                                                                   | 21-11★                                                                                   | G11                                                                                        |          |         |     |                |                |     |     |    |    |    |    |  |
| 20-16                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | II             | 16             |     |     |    |    | 16 |    |  |
|                                                                                          | 21-16★                                                                                   | 21-16★                                                                                   | G16                                                                                        | P        | P       | P   |                |                |     |     |    |    |    |    |  |
| 20-35                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | M              | 79             | 79  |     |    |    |    |    |  |
|                                                                                          | 21-35                                                                                    | 21-35                                                                                    | G35                                                                                        | P        | P       | P   |                |                |     |     |    |    |    |    |  |
| 20-39                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | I              | 39             |     |     |    | 37 | 2  |    |  |
|                                                                                          | 21-39                                                                                    | 21-39                                                                                    | G39                                                                                        | P        | P       | P   |                |                |     |     |    |    |    |    |  |
| 20-41                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | I              | 41             |     |     |    | 41 |    |    |  |
|                                                                                          | 21-41                                                                                    | 21-41                                                                                    | G41                                                                                        | P        | P       | P   |                |                |     |     |    |    |    |    |  |
| 22-1                                                                                     |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | M              | 100            |     | 100 |    |    |    |    |  |
|                                                                                          | 23-1                                                                                     |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
| 22-2                                                                                     |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | M              | 85             |     |     | 85 |    |    |    |  |
|                                                                                          | 23-2                                                                                     |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
| 22-21                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | II             | 21             |     |     |    |    | 21 |    |  |
|                                                                                          | 23-21★                                                                                   | 23-21★                                                                                   | H21                                                                                        | P        | P       | P   |                |                |     |     |    |    |    |    |  |
| 22-32                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     | I              | 32             |     |     |    | 32 |    |    |  |
| 22-35                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 23-35                                                                                    | 23-35                                                                                    | H35                                                                                        | P        | P       | P   | M              | 100            | 100 |     |    |    |    |    |  |
| 22-53■                                                                                   |                                                                                          |                                                                                          |                                                                                            |          |         |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 23-53                                                                                    | 23-53                                                                                    | H53                                                                                        | P        | P       | P   | I              | 53             |     |     |    | 53 |    |    |  |
| 22-55                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 23-55                                                                                    | 23-55                                                                                    | H55                                                                                        |          |         | P   | I              | 55             |     |     |    | 55 |    |    |  |
| 24-1                                                                                     |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 25-1                                                                                     |                                                                                          |                                                                                            | P        | P       |     | M              | 128            |     | 128 |    |    |    |    |  |
| 24-4                                                                                     |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 25-4                                                                                     | 25-4                                                                                     | J4                                                                                         |          |         | P   | I              | 56             |     |     |    | 48 | 8  |    |  |
| 24-19■                                                                                   |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 25-19★                                                                                   | 25-19★                                                                                   | J19                                                                                        |          |         | P   | I              | 19             |     |     |    |    |    | 19 |  |
| 24-24                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 25-24★                                                                                   | 25-24★                                                                                   | J24                                                                                        | P        | P       |     | I              | 24             |     |     |    |    | 12 | 12 |  |
| 24-35                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 25-35                                                                                    | 25-35                                                                                    | J35                                                                                        | P        | P       | P   | New M          | 128            | 128 |     |    |    |    |    |  |
| 24-61                                                                                    |                                                                                          |                                                                                          |                                                                                            | P        | P       |     |                |                |     |     |    |    |    |    |  |
|                                                                                          | 25-61                                                                                    | 25-61                                                                                    | J61                                                                                        | P        | P       | P   | I              | 61             |     |     |    | 61 |    |    |  |

P Available with Pin contacts only

■ Not Mil-Qualified.

\* Hermetic inserts - solder termination standard. (Contact Amphenol Aerospace for optional PCB or eyelet termination).

\* Ground plane proprietary option available.  
(2) Pin inserts only, not tooled for RP or 02RE  
(Consult Amphenol Aerospace for availability)

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

# Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV

## Insert Arrangements

Front face of pin inserts illustrated

Shell Size &  
Insert Arrg. for:

**Series II JT**

**Series I LJT**

**Series III TV**

Service Rating

# of Contacts

Contact Size

|            |            |             |             |             |             |             |              |
|------------|------------|-------------|-------------|-------------|-------------|-------------|--------------|
|            |            |             |             |             |             |             |              |
| <b>8-3</b> | <b>8-6</b> | <b>8-35</b> | <b>8-44</b> | <b>8-98</b> | <b>10-4</b> | <b>10-5</b> | <b>10-13</b> |
| <b>9-3</b> | <b>9-6</b> | <b>9-35</b> | <b>9-44</b> | <b>9-98</b> | <b>11-2</b> | <b>11-4</b> | <b>11-13</b> |
|            |            | <b>9-35</b> |             | <b>9-98</b> | <b>11-2</b> | <b>11-4</b> | <b>11-5</b>  |
| M          | M          | M           | M           | I           | I           | I           | M            |
| 3          | 6          | 6           | 4           | 3           | 2           | 4           | 13           |
| 20         | 22M        | 22D         | 22          | 20          | 16          | 20          | 22M          |

Shell Size &  
Insert Arrg. for:

**Series II JT**

**Series I LJT**

**Series III TV**

Service Rating

# of Contacts

Contact Size

|              |              |              |             |             |             |              |              |
|--------------|--------------|--------------|-------------|-------------|-------------|--------------|--------------|
|              |              |              |             |             |             |              |              |
| <b>10-35</b> | <b>10-98</b> | <b>10-99</b> | <b>12-3</b> | <b>12-4</b> | <b>12-8</b> | <b>12-22</b> | <b>12-35</b> |
| <b>11-35</b> | <b>11-98</b> | <b>11-99</b> | <b>13-3</b> | <b>13-4</b> | <b>13-8</b> | <b>13-22</b> | <b>13-35</b> |
| <b>11-35</b> | <b>11-98</b> | <b>11-99</b> |             | <b>13-4</b> | <b>13-8</b> |              | <b>13-35</b> |
| M            | I            | I            | II          | I           | I           | M            | M            |
| 13           | 6            | 7            | 3           | 4           | 8           | 22           | 22           |
| 22D          | 20           | 20           | 16          | 16          | 20          | 22M          | 22D          |

Shell Size &  
Insert Arrg. for:

**Series II JT**

**Series I LJT**

**Series III TV**

Service Rating

# of Contacts

Contact Size

|              |             |              |              |              |              |              |              |
|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|
|              |             |              |              |              |              |              |              |
| <b>12-98</b> | <b>14-5</b> | <b>14-15</b> | <b>14-18</b> | <b>14-19</b> | <b>14-35</b> | <b>14-37</b> | <b>14-68</b> |
| <b>13-98</b> | <b>15-5</b> | <b>15-15</b> | <b>15-18</b> | <b>15-19</b> | <b>15-35</b> | <b>15-37</b> | <b>15-68</b> |
| <b>13-98</b> | <b>15-5</b> | <b>15-15</b> | <b>15-18</b> | <b>15-19</b> | <b>15-35</b> |              |              |
| I            | II          | I            | I            | I            | M            | M            | I            |
| 10           | 5           | 14           | 18           | 19           | 37           | 37           | 8            |
| 20           | 16          | 20           | 20           | 20           | 22D          | 22M          | 16           |

Shell Size &  
Insert Arrg. for:

**Series II JT**

**Series I LJT**

**Series III TV**

Service Rating

# of Contacts

Contact Size

|              |             |             |              |              |              |              |
|--------------|-------------|-------------|--------------|--------------|--------------|--------------|
|              |             |             |              |              |              |              |
| <b>14-97</b> | <b>16-6</b> | <b>16-8</b> | <b>16-13</b> | <b>16-26</b> | <b>16-35</b> | <b>16-55</b> |
| <b>15-97</b> | <b>17-6</b> | <b>17-8</b> | <b>17-13</b> | <b>17-26</b> | <b>17-35</b> | <b>17-55</b> |
| <b>15-97</b> | <b>17-6</b> | <b>17-8</b> |              | <b>17-26</b> | <b>17-35</b> |              |
| I            | I           | II          | I            | I            | M            | M            |
| 8            | 6           | 8           | 13           | 26           | 55           | 55           |
| 20           | 16          | 16          | 16           | 20           | 22D          | 22M          |

HD: High Density HD38999 (use size 23 contacts only)

### CONTACT LEGEND


|    |    |    |    |     |     |    |
|----|----|----|----|-----|-----|----|
|    |    |    |    |     |     |    |
| 12 | 16 | 20 | 22 | 22M | 22D | 23 |



# Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV

## Insert Arrangements

Front face of pin inserts illustrated

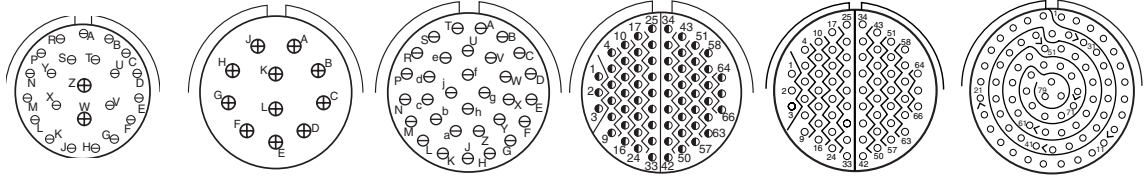

Shell Size &  
Insert Arrg. for:

Series II JT

Series I LJT


Series III TV

Service Rating

# of Contacts

Contact Size

|       |       |       |       |       |      |
|-------|-------|-------|-------|-------|------|
| 16-99 | 18-11 | 18-32 | 18-35 | 18-66 | 20-1 |
| 17-99 | 19-11 | 19-32 | 19-35 | 19-66 | 21-1 |
| 17-99 | 19-11 | 19-32 | 19-35 |       |      |
| I     | II    | 1     | M     | M     | M    |
| 21    | 11    | 32    | 66    | 66    | 79   |
| 20    | 16    | 20    | 22D   | 22M   | 22M  |

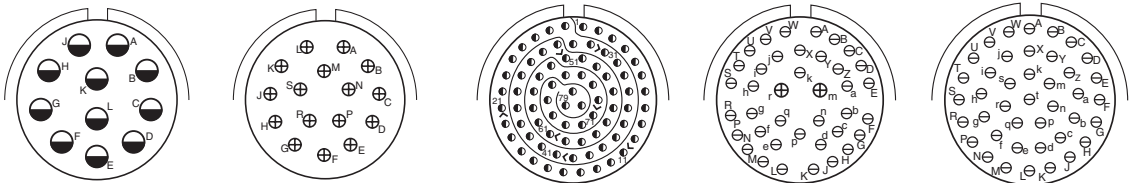

Shell Size &  
Insert Arrg. for:

Series II JT

Series I LJT


Series III TV

Service Rating

# of Contacts

Contact Size

|       |       |       |       |       |
|-------|-------|-------|-------|-------|
| 20-11 | 20-16 | 20-35 | 20-39 | 20-41 |
| 21-11 | 21-16 | 21-35 | 21-39 | 21-41 |
| 21-11 | 21-16 | 21-35 | 21-39 | 21-41 |
| I     | II    | M     | 1     | I     |
| 11    | 16    | 79    | 37    | 41    |
| 12    | 16    | 22D   | 20    | 20    |

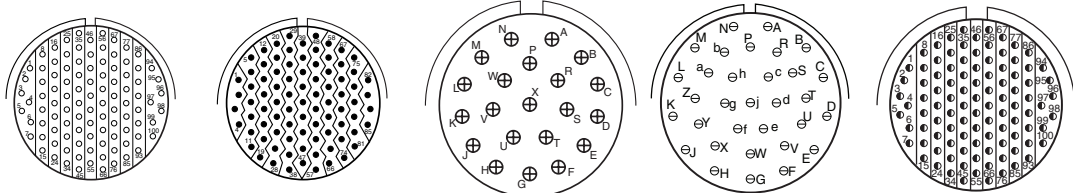

Shell Size &  
Insert Arrg. for:

Series II JT

Series I LJT


Series III TV

Service Rating

Number # Contacts

Contact Size

|      |      |       |       |       |
|------|------|-------|-------|-------|
| 22-1 | 22-2 | 22-21 | 22-32 | 22-35 |
| 23-1 | 23-2 | 23-21 | 23-32 | 23-35 |
|      |      | 23-21 |       | 23-35 |
| M    | M    | II    | I     | M     |
| 100  | 85   | 21    | 32    | 100   |
| 22M  | 22   | 16    | 20    | 22D   |



CONTACT LEGEND

# Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV

## Insert Arrangements

Front face of pin inserts illustrated

Shell Size &  
Insert Arrg. for:

**Series II JT**





**Series I LJT**

**Series III TV**

Service Rating

# of Contacts

Contact Size

|                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>22-53</b>                                                                      | <b>22-55</b>                                                                      | <b>24-1</b>                                                                        | <b>24-4</b>                                                                         |
| <b>23-53</b>                                                                      | <b>23-55</b>                                                                      | <b>25-1</b>                                                                        | <b>25-4</b>                                                                         |
| <b>23-53</b>                                                                      | <b>23-55</b>                                                                      |                                                                                    | <b>25-4</b>                                                                         |
| I                                                                                 | I                                                                                 | M                                                                                  | I                                                                                   |
| 53                                                                                | 55                                                                                | 128                                                                                | 48                                                                                  |
| 20                                                                                | 20                                                                                | 22M                                                                                | 20                                                                                  |
|                                                                                   |                                                                                   |                                                                                    | 8                                                                                   |
|                                                                                   |                                                                                   |                                                                                    | 16                                                                                  |

Shell Size &  
Insert Arrg. for:

**Series II JT**





**Series I LJT**

**Series III TV**

Service Rating

# of Contacts

Contact Size

|                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>24-19</b>                                                                      | <b>24-24</b>                                                                      | <b>24-35</b>                                                                       | <b>24-61</b>                                                                        |
| <b>25-19</b>                                                                      | <b>25-24</b>                                                                      | <b>25-35</b>                                                                       | <b>25-61</b>                                                                        |
| <b>25-19</b>                                                                      | <b>25-24</b>                                                                      | <b>25-35</b>                                                                       | <b>25-61</b>                                                                        |
| I                                                                                 | I                                                                                 | M                                                                                  | I                                                                                   |
| 19                                                                                | 12                                                                                | 128                                                                                | 61                                                                                  |
| 12                                                                                | 16                                                                                | 22D                                                                                | 20                                                                                  |
|                                                                                   | 12                                                                                |                                                                                    |                                                                                     |
|                                                                                   | 12                                                                                |                                                                                    |                                                                                     |

**HD:** High Density HD38999 (use size 23 contacts only)

**Note:** MS connector 21-75 is supplied with four size 8 twinax contacts.  
Commercial connector 21-75 is supplied with four size 8 coax contacts.  
MS connector 21-79 has provision for two size 8 coax contacts.  
Coax contacts are not supplied unless specified by customers.

CONTACT LEGEND

  
 12 16 20 22 22M 22D 23

# Hermetic MIL-DTL-38999, Series I LJT, II JT, III TV

Thermocouple Contacts/Sealing Plugs/Finishing Data

## SERVICE RATING\*\*

| Service Rating | Suggested Oper. Voltage (Sea Level) |      | Test Voltage (Sea Level) | Test Voltage 50,000 Ft. | Test Voltage 70,000 Ft. | Test Voltage 110,000 Ft. |
|----------------|-------------------------------------|------|--------------------------|-------------------------|-------------------------|--------------------------|
|                | AC (RMS)                            | DC   |                          |                         |                         |                          |
| M              | 400                                 | 500  | 1300 VRMS                | 550 VRMS                | 350 VRMS                | 200 VRMS                 |
| N              | 300                                 | 450  | 1000 VRMS                | 400 VRMS                | 260 VRMS                | 200 VRMS                 |
| I              | 600                                 | 850  | 1800 VRMS                | 600 VRMS                | 400 VRMS                | 200 VRMS                 |
| II             | 900                                 | 1250 | 2300 VRMS                | 800 VRMS                | 500 VRMS                | 200 VRMS                 |

\*\* Please note that the establishment of electrical safety factors is left entirely in the designer's hands, since they are in the best position to know what peak voltage, switching surges, transients, etc. can be expected in a particular circuit.

## HERMETIC SHELL COMPONENTS

| Material/Finish                   | Service Class |            |
|-----------------------------------|---------------|------------|
|                                   | Military      | Commercial |
| Stainless Steel                   | Y             | Y          |
| Stainless Steel with Nickel Plate | N             | YN         |

## HERMETIC CONNECTORS

| Finish                                                          | Suffix   |            | Indicated Finish Standard for JT Types Listed Below | Indicated Finish Standard for LJT Types Listed Below |
|-----------------------------------------------------------------|----------|------------|-----------------------------------------------------|------------------------------------------------------|
|                                                                 | Military | Commercial |                                                     |                                                      |
| Carbon Steel Shell<br>Tin Plated Shell and Contacts             |          |            | JT( )H / JT( )Y<br>JTL( )H / JTL( )Y                | LJT( )Y<br>LJT( )H                                   |
| Carbon Steel Shell Tin Plated Shell and<br>Gold Plated Contacts | MS (D)   |            |                                                     |                                                      |
| Stainless Steel Shell Gold Plated Contacts                      | MS (E)   | (162)      | JTS( )Y<br>JTLS( )Y                                 | LJTS( )Y                                             |

# Series III MIL-DTL-38999

TRI-START, MIL-DTL-38999, SERIES III  
WITH STAINLESS STEEL SHELLS

Amphenol® Tri-Start MIL-DTL-38999\* Series III Connectors offer the highest performance capabilities for both general duty and severe environment applications meeting or exceeding MIL-DTL-38999 Series III requirements.


High reliability and increased versatility best describe Amphenol MIL-DTL-38999, Series III circular connectors. Originally designed for the harshest of environments and most demanding of applications, Amphenol MIL-DTL-38999 Series III, Tri-Start connectors continue to evolve in pace with the needs of an ever-changing market.



STAINLESS STEEL  
WITH NICKEL  
PLATING



PASSIVATED  
STAINLESS STEEL



## FEATURES:

- **EMI Shielding**  
Solid metal-to-metal coupling, grounding fingers, electroless nickel plating, and thicker wall sections provide superior EMI shielding capability of 65dB minimum at 10 GHz
- **Contact Protection**  
Recessed pins in this 100% scoop-proof connector minimize potential contact damage
- **Moisture Resistance**  
Improved interfacial seal design helps prevent electrolytic erosion of contacts
- **Corrosion Resistance**  
Shells of stainless steel with nickel plating withstand a 500 hour salt spray exposure
- **Vibration/Shock**  
Operates under severe high temperature vibration, through 200°C
- **Lockwiring Eliminated**  
Unique, self-locking, quick coupling connector eliminates lockwiring
- **Quick Coupling**  
Completely mates and self-locks in a 360° turn of the coupling nut
- **Hermetic**- air leakage limited to  $1 \times 10^{-7}$  cm<sup>3</sup> per second

# Hermetic Military

## How to Order

| MILITARY         | DESCRIPTION                      | COMMERCIAL               |
|------------------|----------------------------------|--------------------------|
| <b>D38999/21</b> | Hermetic Box Mounting Receptacle | <b>TVPS02Y, TVPS02YN</b> |
| <b>D38999/23</b> | Hermetic Jam Nut Receptacle      | <b>TVS07Y, TVS07YN</b>   |
| <b>D38999/25</b> | Hermetic Solder Mount Receptacle | <b>TVSI</b>              |
| <b>D38999/27</b> | Hermetic Weld Mounted Receptacle | <b>TVSHI</b>             |

## HOW TO ORDER: MILITARY

| 1. CONNECTOR TYPE               |
|---------------------------------|
| <b>38999/</b> MIL-DTL-38999 III |


| 2. SHELL STYLE                             |
|--------------------------------------------|
| <b>21</b> Box Mount Receptacle Hermetic    |
| <b>23</b> Jam Nut Receptacle Hermetic      |
| <b>25</b> Solder Mount Receptacle Hermetic |
| <b>27</b> Weld Mounted Receptacle Hermetic |

| 4. SHELL SIZE & INSERT ARRANGEMENTS                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------|
| Shell Size & Insert Arrangements are on pages 5-6. First number represents Shell Size, second number is the Insert Arrangement. |

| 5. CONTACT TYPE                 |
|---------------------------------|
| <b>P</b> 500 Cycle Pin Contacts |
| <b>X</b> Pin Contacts - Eyelet  |
| <b>C</b> PC Tail                |

| 6. ALTERNATE KEYING POSITION                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The angles for a given connector are the same whether it contains pins or sockets. Master key stays fixed, minor keys rotate. Inserts are not rotated in conjunction with the master key/keyway. |

## RECEPTACLE (FRONT FACE SHOWN)



| 1. Connector Type | 2. Shell Style | 3. Service Class | 4. Shell Size- Insert Arrangement | 5. Contact Type | 6. Alternate Keying Position |
|-------------------|----------------|------------------|-----------------------------------|-----------------|------------------------------|
| <b>D38999/</b>    | <b>21</b>      | <b>Y</b>         | <b>G35</b>                        | <b>P</b>        | <b>N</b>                     |

| 3. SERVICE CLASS |                                 |      |                 |                                                       |
|------------------|---------------------------------|------|-----------------|-------------------------------------------------------|
| Military         | Finish                          | RoHS | Material        | Material/ Description                                 |
| N                | Stainless Steel w/ Nickel Plate | •    | Stainless Steel | Hermetic connectors, corrosion resistant steel, 200°C |
| Y                | Stainless Steel                 | •    | Stainless Steel | Hermetic seal, 200°C passivated stainless steel       |

| TRIPLE START THREADS |    |    |    |    |    |    |    |    |                     |
|----------------------|----|----|----|----|----|----|----|----|---------------------|
| A                    | B  | C  | D  | E  | F  | G  | H  | J  | Mil Shell Size      |
| 9                    | 11 | 13 | 15 | 17 | 19 | 21 | 23 | 25 | Amphenol Shell size |

| Shell Size                 | Key & Keyway Arrangement Identification Letter | AR° or AP° BSC | BR° or BP° BSC | CR° or CP° BSC | DR° or DP° BSC |
|----------------------------|------------------------------------------------|----------------|----------------|----------------|----------------|
| A (9)                      | <b>N*</b>                                      | 105            | 140            | 215            | 265            |
|                            | <b>A</b>                                       | 102            | 132            | 248            | 320            |
|                            | <b>B</b>                                       | 80             | 118            | 230            | 312            |
|                            | <b>C</b>                                       | 35             | 140            | 205            | 275            |
|                            | <b>D</b>                                       | 64             | 155            | 234            | 304            |
| B (11)<br>C (13)<br>D (15) | <b>E</b>                                       | 91             | 131            | 197            | 240            |
|                            | <b>N*</b>                                      | 95             | 141            | 208            | 236            |
|                            | <b>A</b>                                       | 113            | 156            | 182            | 292            |
|                            | <b>B</b>                                       | 90             | 145            | 195            | 252            |
|                            | <b>C</b>                                       | 53             | 156            | 220            | 255            |
| E (17)<br>F (19)           | <b>D</b>                                       | 119            | 146            | 176            | 298            |
|                            | <b>E</b>                                       | 51             | 141            | 184            | 242            |
|                            | <b>N*</b>                                      | 80             | 142            | 196            | 293            |
|                            | <b>A</b>                                       | 135            | 170            | 200            | 310            |
|                            | <b>B</b>                                       | 49             | 169            | 200            | 244            |
| G (21)<br>H (23)<br>J (25) | <b>C</b>                                       | 66             | 140            | 200            | 257            |
|                            | <b>D</b>                                       | 62             | 145            | 180            | 280            |
|                            | <b>E</b>                                       | 79             | 153            | 197            | 272            |
|                            | <b>N*</b>                                      | 80             | 142            | 196            | 293            |
|                            | <b>A</b>                                       | 135            | 170            | 200            | 310            |
|                            | <b>B</b>                                       | 49             | 169            | 200            | 244            |
|                            | <b>C</b>                                       | 66             | 140            | 200            | 257            |
|                            | <b>D</b>                                       | 62             | 145            | 180            | 280            |
|                            | <b>E</b>                                       | 79             | 153            | 197            | 272            |

# Hermetic MIL-DTL-38999, Series III TV

## How to Order (Commercial)

| 1.<br>Type & Class | 2.<br>Shell Size-Insert Arrg. | 3.<br>Contact Type | 4.<br>Alternate Position |
|--------------------|-------------------------------|--------------------|--------------------------|
| <b>TVS07Y</b>      | <b>11-4</b>                   | <b>P</b>           | <b>N</b>                 |

### 1. SELECT A TYPE & CLASS

| RATES |               | Passivated (Non-Firewall) | Nickel Plated (Non-Firewall) |
|-------|---------------|---------------------------|------------------------------|
|       | Temperature   | 200°C                     | 200°C                        |
|       | Salt Spray    | 500 Hrs                   | 500 Hrs                      |
|       | EMI Shielding | -65dB @ 10GHz             | -50dB @ 10GHz                |
|       | RoHS          |                           |                              |

| Hermetic | Box Mounting Receptacle  | <b>TVPS02Y-</b> | <b>TVPS02YN-</b> |
|----------|--------------------------|-----------------|------------------|
|          | Jam Nut Receptacle       | <b>TVS07Y-</b>  | <b>TVS07YN-</b>  |
|          | Solder Mount             | <b>TVSIY-</b>   | <b>TVSIYN-</b>   |
|          | Weld Mounting Receptacle | <b>TVSHIY-</b>  | <b>TVSHIYN-</b>  |

### 2. SHELL SIZE & INSERT ARRANGEMENTS

See table on page 5-6. First number represents Shell Size, second number is the Insert Arrangement.

### 3. CONTACT TYPE

|          |                        |
|----------|------------------------|
| <b>P</b> | 500 Cycle Pin Contacts |
| <b>X</b> | Pin Contacts - Eyelet  |

See pages 16-20 for PCB Hermetic Connector options


### 4. ALTERNATE KEYING POSITION

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The angles for a given connector are the same whether it contains pins or sockets. Master key stays fixed, minor keys rotate. Inserts are not rotated in conjunction with the master key/keyway.

| Shell Size     | Key & Keyway Arrangement Identification Letter | AR° or AP° BSC | BR° or BP° BSC | CR° or CP° BSC | DR° or DP° BSC |
|----------------|------------------------------------------------|----------------|----------------|----------------|----------------|
| 9              | <b>N*</b>                                      | 105            | 140            | 215            | 265            |
|                | <b>A</b>                                       | 102            | 132            | 248            | 320            |
|                | <b>B</b>                                       | 80             | 118            | 230            | 312            |
|                | <b>C</b>                                       | 35             | 140            | 205            | 275            |
|                | <b>D</b>                                       | 64             | 155            | 234            | 304            |
|                | <b>E</b>                                       | 91             | 131            | 197            | 240            |
| 11, 13, and 15 | <b>N*</b>                                      | 95             | 141            | 208            | 236            |
|                | <b>A</b>                                       | 113            | 156            | 182            | 292            |
|                | <b>B</b>                                       | 90             | 145            | 195            | 252            |
|                | <b>C</b>                                       | 53             | 156            | 220            | 255            |
|                | <b>D</b>                                       | 119            | 146            | 176            | 298            |
|                | <b>E</b>                                       | 51             | 141            | 184            | 242            |
| 17 and 19      | <b>N*</b>                                      | 80             | 142            | 196            | 293            |
|                | <b>A</b>                                       | 135            | 170            | 200            | 310            |
|                | <b>B</b>                                       | 49             | 169            | 200            | 244            |
|                | <b>C</b>                                       | 66             | 140            | 200            | 257            |
|                | <b>D</b>                                       | 62             | 145            | 180            | 280            |
|                | <b>E</b>                                       | 79             | 153            | 197            | 272            |
| 21, 23, and 25 | <b>N*</b>                                      | 80             | 142            | 196            | 293            |
|                | <b>A</b>                                       | 135            | 170            | 200            | 310            |
|                | <b>B</b>                                       | 49             | 169            | 200            | 244            |
|                | <b>C</b>                                       | 66             | 140            | 200            | 257            |
|                | <b>D</b>                                       | 62             | 145            | 180            | 280            |
|                | <b>E</b>                                       | 79             | 153            | 197            | 272            |

### RECEPTACLE

(FRONT FACE SHOWN)





# Hermetic Box Mounting Receptacle


Military (D38999/21), Commercial (TVPS02)

PART NUMBER BUILDER Page 12

ONLINE CONFIGURATOR [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com)

**MILITARY**  
D38999/21

**COMMERCIAL SS**  
TVPS02Y  
TVPS02YN

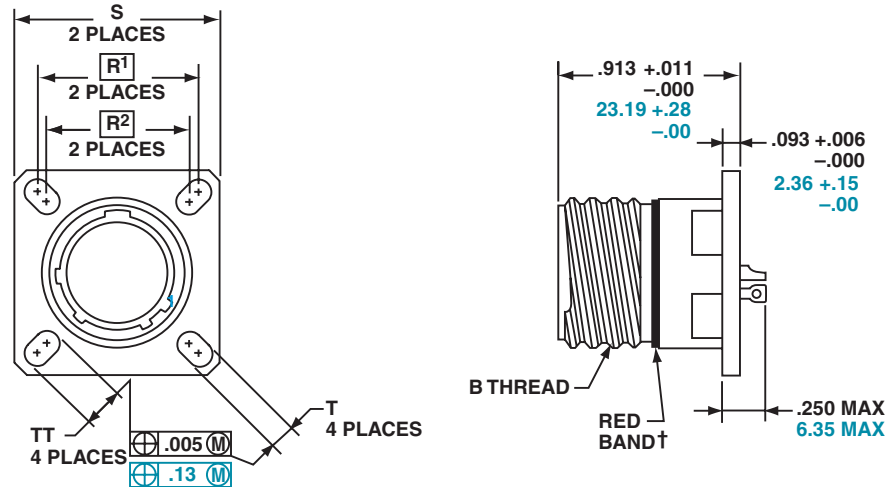

† Red band indicates fully mated

NOTE: Consult Amphenol Aerospace for availability of non-glass-sealed versions with printed circuit tail contacts.

Inches

| Shell Size | MS Shell Size Coded | B Thread<br>0.1P-0.3L-TS<br>(Plated) | R1    | R2    | S<br>±.010 | T<br>±.008 | TT<br>±.008 |
|------------|---------------------|--------------------------------------|-------|-------|------------|------------|-------------|
| 9          | A                   | .6250                                | .719  | .594  | .938       | .128       | .216        |
| 11         | B                   | .7500                                | .812  | .719  | 1.031      | .128       | .194        |
| 13         | C                   | .8750                                | .906  | .812  | 1.125      | .128       | .194        |
| 15         | D                   | 1.0000                               | .969  | .906  | 1.219      | .128       | .173        |
| 17         | E                   | 1.1875                               | 1.062 | .969  | 1.312      | .128       | .194        |
| 19         | F                   | 1.2500                               | 1.156 | 1.062 | 1.438      | .128       | .194        |
| 21         | G                   | 1.3750                               | 1.250 | 1.156 | 1.562      | .128       | .194        |
| 23         | H                   | 1.5000                               | 1.375 | 1.250 | 1.688      | .154       | .242        |
| 25         | J                   | 1.6250                               | 1.500 | 1.375 | 1.812      | .154       | .242        |

Millimeters

| Shell Size | MS Shell Size Coded | R1    | R2    | S<br>±.25 | T<br>±.20 | TT<br>±.20 |
|------------|---------------------|-------|-------|-----------|-----------|------------|
| 9          | A                   | 18.26 | 15.09 | 23.83     | 3.25      | 5.49       |
| 11         | B                   | 20.62 | 18.26 | 26.19     | 3.25      | 4.93       |
| 13         | C                   | 23.01 | 20.62 | 28.58     | 3.25      | 4.93       |
| 15         | D                   | 24.61 | 23.01 | 30.96     | 3.25      | 4.39       |
| 17         | E                   | 26.97 | 24.61 | 33.32     | 3.25      | 4.93       |
| 19         | F                   | 29.36 | 26.97 | 36.53     | 3.25      | 4.93       |
| 21         | G                   | 31.75 | 29.36 | 39.67     | 3.25      | 4.93       |
| 23         | H                   | 34.93 | 31.75 | 42.88     | 3.91      | 6.15       |
| 25         | J                   | 38.10 | 34.93 | 46.02     | 3.91      | 6.15       |

All dimensions for reference only

□ Designates true position dimensioning

# Hermetic Jam Nut Receptacle


Military (D38999/23), Commercial (TVS07)

HOW TO ORDER Page 12

ONLINE CONFIGURATOR [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com)

**MILITARY**  
**D38999/23**

**COMMERCIAL SS**  
**TVS07Y**  
**TVS07YN**

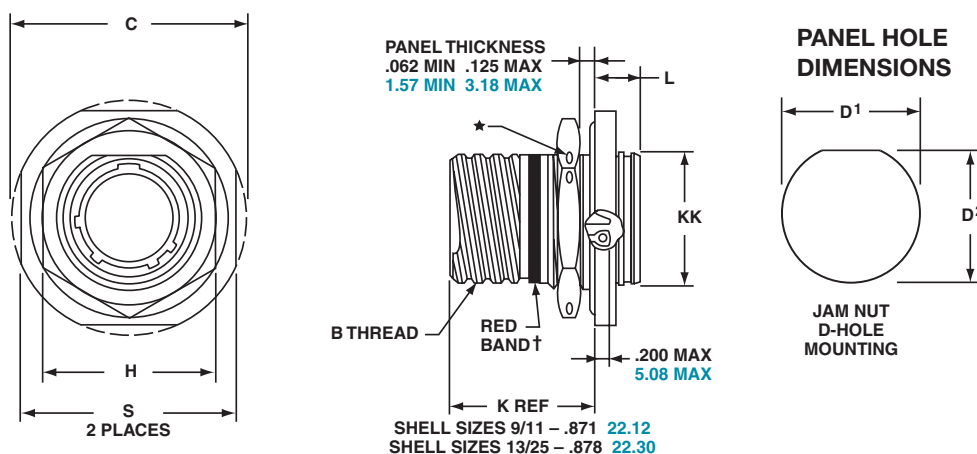

†Red band indicates fully mated

\*.059 dia min. 1.5 dia. min. 3 lockwire holes Formed lockwire hole design (6 holes) is optional.

Inches

| Shell Size | MS Shell Size code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | C Max | D <sup>1</sup> +.010 - .000 | D <sup>2</sup> +.000 - .010 | H Hex +.017 - .016 | L Max | S ±.010 | KK +.011 - .000 |
|------------|--------------------|-----------------------------------------|-------|-----------------------------|-----------------------------|--------------------|-------|---------|-----------------|
| 9          | A                  | .6250                                   | 1.199 | .693                        | .657                        | .875               | .357  | 1.062   | .642            |
| 11         | B                  | .7500                                   | 1.386 | .825                        | .770                        | 1.000              | .357  | 1.250   | .766            |
| 13         | C                  | .8750                                   | 1.511 | 1.010                       | .955                        | 1.188              | .357  | 1.375   | .892            |
| 15         | D                  | 1.0000                                  | 1.636 | 1.135                       | 1.085                       | 1.312              | .357  | 1.500   | 1.018           |
| 17         | E                  | 1.1875                                  | 1.761 | 1.260                       | 1.210                       | 1.438              | .357  | 1.625   | 1.142           |
| 19         | F                  | 1.2500                                  | 1.949 | 1.385                       | 1.335                       | 1.562              | .381  | 1.812   | 1.268           |
| 21         | G                  | 1.3750                                  | 2.073 | 1.510                       | 1.460                       | 1.688              | .381  | 1.938   | 1.392           |
| 23         | H                  | 1.5000                                  | 2.199 | 1.635                       | 1.585                       | 1.812              | .381  | 2.062   | 1.518           |
| 25         | J                  | 1.6250                                  | 2.323 | 1.760                       | 1.710                       | 2.000              | .381  | 2.188   | 1.642           |

Millimeters

| Shell Size | MS Shell Size code | C Max | D <sup>1</sup> +.25 - .00 | D <sup>2</sup> +.00 - .25 | H Hex +.43 - .41 | L Max | S ±.25 | KK +.28 - .00 |
|------------|--------------------|-------|---------------------------|---------------------------|------------------|-------|--------|---------------|
| 9          | A                  | 30.45 | 17.60                     | 16.70                     | 22.23            | 9.07  | 26.97  | 16.31         |
| 11         | B                  | 35.20 | 20.96                     | 19.59                     | 25.40            | 9.07  | 31.75  | 19.46         |
| 13         | C                  | 38.38 | 25.65                     | 24.26                     | 30.18            | 9.07  | 34.93  | 22.66         |
| 15         | D                  | 41.55 | 28.83                     | 27.56                     | 33.32            | 9.07  | 38.10  | 25.86         |
| 17         | E                  | 44.73 | 32.01                     | 30.73                     | 36.53            | 9.07  | 41.28  | 29.01         |
| 19         | F                  | 49.50 | 35.18                     | 33.91                     | 39.67            | 9.68  | 46.02  | 32.21         |
| 21         | G                  | 52.65 | 38.35                     | 37.08                     | 42.80            | 9.68  | 49.23  | 35.36         |
| 23         | H                  | 55.85 | 41.53                     | 40.26                     | 46.02            | 9.68  | 52.37  | 38.56         |
| 25         | J                  | 59.00 | 44.70                     | 43.43                     | 50.80            | 9.68  | 55.58  | 41.71         |

All dimensions for reference only

# Hermetic Solder Mounting Receptacle



Military (D38999/25), Commercial (TVSI)

HOW TO ORDER Page 12

ONLINE CONFIGURATOR [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com)

**MILITARY**  
D38999/25

**COMMERCIAL SS**  
TVSIY  
TVSIYN

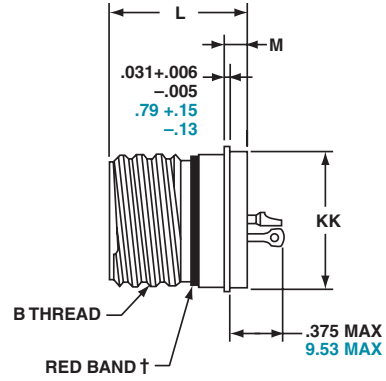

† Red band indicates fully mated

Inches

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | L<br>+.011<br>-.005 | M<br>+.006<br>-.005 | GG Dia.<br>+.011<br>-.010 | KK Dia<br>+.011<br>-.005 |
|------------|--------------------|-----------------------------------------|---------------------|---------------------|---------------------------|--------------------------|
| 9          | A                  | .6250                                   | .806                | .125                | .750                      | .672                     |
| 11         | B                  | .7500                                   | .806                | .125                | .844                      | .781                     |
| 13         | C                  | .8750                                   | .806                | .125                | .969                      | .906                     |
| 15         | D                  | 1.0000                                  | .806                | .125                | 1.094                     | 1.031                    |
| 17         | E                  | 1.1875                                  | .806                | .125                | 1.218                     | 1.156                    |
| 19         | F                  | 1.2500                                  | .806                | .125                | 1.312                     | 1.250                    |
| 21         | G                  | 1.3750                                  | .806                | .125                | 1.438                     | 1.375                    |
| 23         | H                  | 1.5000                                  | .838                | .156                | 1.563                     | 1.500                    |
| 25         | J                  | 1.6250                                  | .838                | .156                | 1.688                     | 1.625                    |

Millimeters

| Shell Size | MS Shell Size Code | L<br>+.28<br>-.00 | M<br>+.15<br>-.13 | GG Dia.<br>+.28<br>-.25 | KK Dia<br>+.03<br>-.13 |
|------------|--------------------|-------------------|-------------------|-------------------------|------------------------|
| 9          | A                  | 20.47             | 3.18              | 19.05                   | 17.07                  |
| 11         | B                  | 20.47             | 3.18              | 21.44                   | 19.84                  |
| 13         | C                  | 20.47             | 3.18              | 24.61                   | 23.01                  |
| 15         | D                  | 20.47             | 3.18              | 27.79                   | 26.19                  |
| 17         | E                  | 20.47             | 3.18              | 30.94                   | 29.36                  |
| 19         | F                  | 20.47             | 3.18              | 33.32                   | 31.75                  |
| 21         | G                  | 20.47             | 3.18              | 36.53                   | 34.93                  |
| 23         | H                  | 21.29             | 3.96              | 39.70                   | 38.10                  |
| 25         | J                  | 21.29             | 3.96              | 42.88                   | 41.28                  |

# Hermetic Wall Mounting Receptacle

Military (D38999/27), Commercial (TVSHIY)



HOW TO ORDER Page 12

ONLINE CONFIGURATOR

[www.amphenol-aerospace.com](http://www.amphenol-aerospace.com)

**MILITARY**  
D38999/27

**COMMERCIAL SS**  
TVSHIY  
TVSHIYN

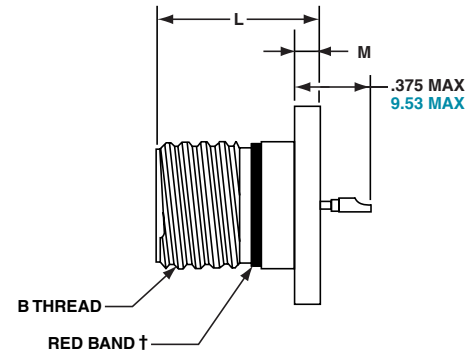

† Red band indicates fully mated

Inches

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | L<br>+.011<br>-.000 | M<br>+.006<br>-.005 | GG Dia.<br>+.011<br>-.010 |
|------------|--------------------|-----------------------------------------|---------------------|---------------------|---------------------------|
| 9          | A                  | .6250                                   | .806                | .125                | .973                      |
| 11         | B                  | .7500                                   | .806                | .125                | 1.095                     |
| 13         | C                  | .8750                                   | .806                | .125                | 1.221                     |
| 15         | D                  | 1.0000                                  | .806                | .125                | 1.347                     |
| 17         | E                  | 1.1875                                  | .806                | .125                | 1.434                     |
| 19         | F                  | 1.2500                                  | .806                | .125                | 1.579                     |
| 21         | G                  | 1.3750                                  | .806                | .125                | 1.721                     |
| 23         | H                  | 1.5000                                  | .838                | .156                | 1.886                     |
| 25         | J                  | 1.6250                                  | .838                | .156                | 1.973                     |


Millimeters

| Shell Size | MS Shell Size Code | L<br>+.28<br>-.00 | M<br>+.15<br>-.13 | GG Dia.<br>+.25<br>-.00 |
|------------|--------------------|-------------------|-------------------|-------------------------|
| 9          | A                  | 20.47             | 3.18              | 24.71                   |
| 11         | B                  | 20.47             | 3.18              | 27.81                   |
| 13         | C                  | 20.47             | 3.18              | 31.01                   |
| 15         | D                  | 20.47             | 3.18              | 34.21                   |
| 17         | E                  | 20.47             | 3.18              | 36.42                   |
| 19         | F                  | 20.47             | 3.18              | 40.11                   |
| 21         | G                  | 20.47             | 3.18              | 43.71                   |
| 23         | H                  | 21.29             | 3.96              | 47.90                   |
| 25         | J                  | 21.29             | 3.96              | 50.11                   |

All dimensions for reference only

# PCB Hermetic Box Mounting Receptacle

Commercial

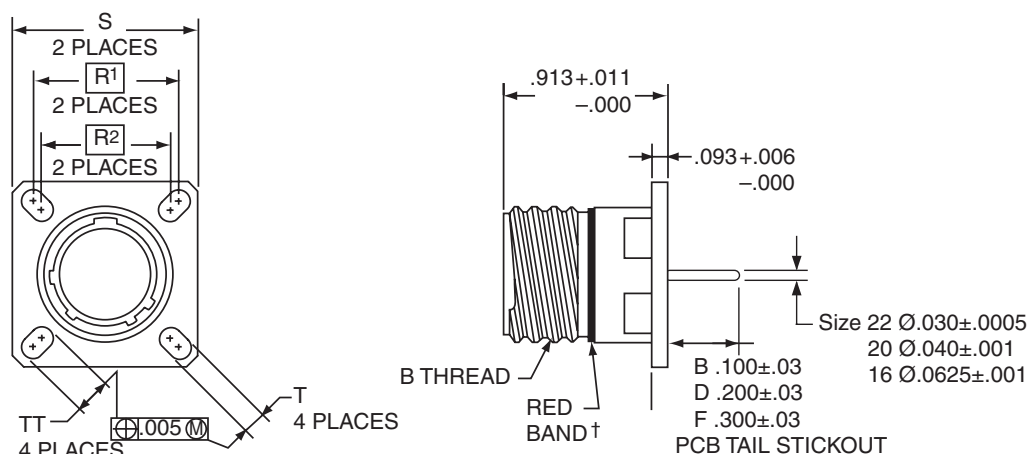

| PART #          | 1.                    | 2.                      | 3.                  | 4.                            | 5.                | 6.               |
|-----------------|-----------------------|-------------------------|---------------------|-------------------------------|-------------------|------------------|
| See chart below | Base Number<br>10-626 | Coded Shell Size<br>501 | Insert Arrg.<br>-35 | Contact Type/Alt. Keying<br>P | Shell Finish<br>1 | Tail Length<br>B |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626**

Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail

### 2. CODED SHELL SIZE

See chart below **501-509**, designates size **9-25** shell size.

### 3. INSERT ARRANGEMENT

**-35**

Designates Insert Arrangement Number

Refer to insert availability chart on page 5-6.

### 4. CONTACT TYPE/ALTERNATE KEYING

**P**

Designates Pin Contacts in Normal Position

Refer to page 12 for alternate rotation letters to use.

### 5. SHELL FINISH

**1**

Hermetic seal, passivated Stainless Steel, 200°C

**2**

Hermetic seal, Stainless Steel w/Nickel Plate

**3**

Carbon Steel w/reflowed tin plate

### 6. TAIL LENGTH

**B**

.100±.03

**D**

.200±.03

**F**

.300±.03

† Red band indicates fully mated


| Shell Size | Part Number            | B Thread<br>0.1P-0.3L-TS<br>(Plated) | R1    | R2    | S<br>±.010 | T<br>±.008 | TT<br>±.008 |
|------------|------------------------|--------------------------------------|-------|-------|------------|------------|-------------|
| 9          | 10-626 <b>501</b> -XXX | .6250                                | .719  | .594  | .938       | .128       | .216        |
| 11         | <b>502</b> -XXX        | .7500                                | .812  | .719  | 1.031      | .128       | .194        |
| 13         | <b>503</b> -XXX        | .8750                                | .906  | .812  | 1.125      | .128       | .194        |
| 15         | <b>504</b> -XXX        | 1.0000                               | .969  | .906  | 1.219      | .128       | .173        |
| 17         | <b>505</b> -XXX        | 1.1875                               | 1.062 | .969  | 1.312      | .128       | .194        |
| 19         | <b>506</b> -XXX        | 1.2500                               | 1.156 | 1.062 | 1.438      | .128       | .194        |
| 21         | <b>507</b> -XXX        | 1.3750                               | 1.250 | 1.156 | 1.562      | .128       | .194        |
| 23         | <b>508</b> -XXX        | 1.5000                               | 1.375 | 1.250 | 1.688      | .154       | .242        |
| 25         | <b>509</b> -XXX        | 1.6250                               | 1.500 | 1.375 | 1.812      | .154       | .242        |

All dimensions for reference.

□ Designates true position dimensioning

# PCB Hermetic Jam Nut Receptacle

Commercial

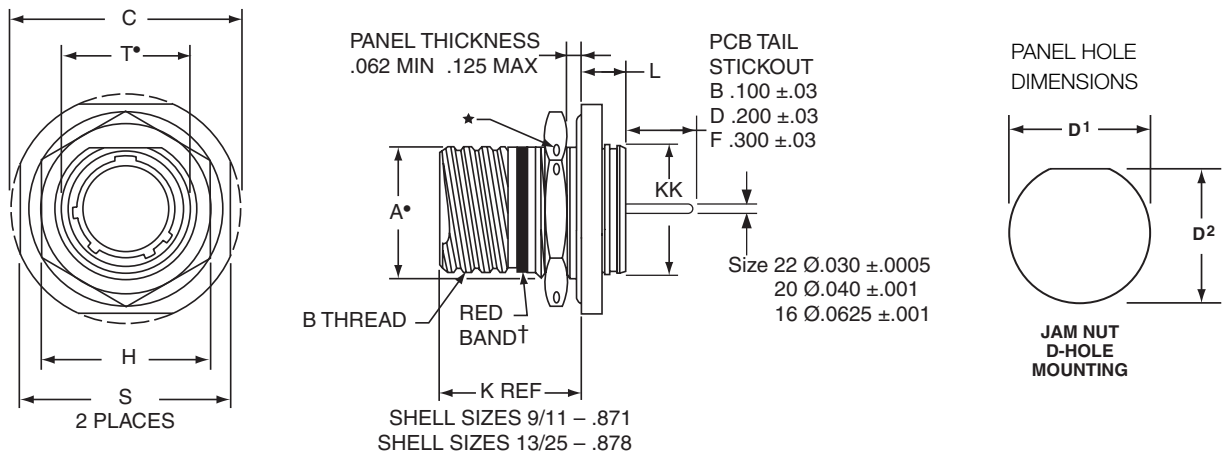

| PART #          | 1.          | 2.               | 3.           | 4.                       | 5.           | 6.          |
|-----------------|-------------|------------------|--------------|--------------------------|--------------|-------------|
| See chart below | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/Alt. Keying | Shell Finish | Tail Length |
|                 | 10-626      | 471              | -35          | P                        | 1            | B           |

## HOW TO ORDER

|                              |                                                                 |                                                                          |                                            |
|------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------|
| <b>1. BASE NUMBER</b>        |                                                                 | <b>2. CODED SHELL SIZE</b>                                               |                                            |
| <b>10-626</b>                | Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail | See chart below <b>471-479</b> , designates size <b>9-25</b> shell size. |                                            |
| <b>3. INSERT ARRANGEMENT</b> |                                                                 | <b>4. CONTACT TYPE/ALTERNATE KEYING</b>                                  |                                            |
| <b>-35</b>                   | Designates Insert Arrangement Number                            | <b>P</b>                                                                 | Designates Pin Contacts in Normal Position |
| <b>5. SHELL FINISH</b>       |                                                                 | <b>6. TAIL LENGTH</b>                                                    |                                            |
| <b>1</b>                     | Hermetic seal, passivated Stainless Steel, 200°C                | <b>B</b>                                                                 | .100±.03                                   |
| <b>2</b>                     | Hermetic seal, Stainless Steel w/Nickel Plate                   | <b>D</b>                                                                 | .200±.03                                   |
| <b>3</b>                     | Carbon Steel w/reflowed tin plate                               | <b>F</b>                                                                 | .300±.03                                   |

† Red band indicates fully mated


\* .059 dia. min. (1.5 dia. min.) 3 lockwire holes. Formed lockwire hole design (6 holes) is optional.

| Shell Size | Part Number            | A+<br>+.000<br>-.010 | B Thread<br>Class 2A<br>0.1P-0.3L-<br>TS (Plated) | C<br>Max | D1<br>+.010<br>-.000 | D1<br>+.000<br>-.010 | H Hex<br>+.017<br>-.016 | L<br>Max | S<br>±.010 | T+<br>+.010<br>-.000 | KK +.011<br>-.000 |
|------------|------------------------|----------------------|---------------------------------------------------|----------|----------------------|----------------------|-------------------------|----------|------------|----------------------|-------------------|
| 9          | 10-626 <b>471</b> -XXX | .669                 | .6250                                             | 1.199    | .700                 | .670                 | .875                    | .357     | 1.062      | .697                 | .642              |
| 11         | <b>472</b> -XXX        | .769                 | .7500                                             | 1.386    | .825                 | .770                 | 1.000                   | .357     | 1.250      | .822                 | .766              |
| 13         | <b>473</b> -XXX        | .955                 | .8750                                             | 1.511    | 1.010                | .955                 | 1.188                   | .357     | 1.375      | 1.007                | .892              |
| 15         | <b>474</b> -XXX        | 1.084                | 1.0000                                            | 1.636    | 1.135                | 1.085                | 1.312                   | .357     | 1.500      | 1.134                | 1.018             |
| 17         | <b>475</b> -XXX        | 1.208                | 1.1875                                            | 1.761    | 1.260                | 1.210                | 1.438                   | .357     | 1.625      | 1.259                | 1.142             |
| 19         | <b>476</b> -XXX        | 1.333                | 1.2500                                            | 1.949    | 1.385                | 1.335                | 1.562                   | .381     | 1.182      | 1.384                | 1.268             |
| 21         | <b>477</b> -XXX        | 1.459                | 1.3750                                            | 2.073    | 1.510                | 1.460                | 1.688                   | .381     | 1.938      | 1.507                | 1.392             |
| 23         | <b>478</b> -XXX        | 1.575                | 1.5000                                            | 2.199    | 1.635                | 1.585                | 1.812                   | .381     | 2.062      | 1.634                | 1.518             |
| 25         | <b>479</b> -XXX        | 1.709                | 1.6250                                            | 2.323    | 1.760                | 1.710                | 2.000                   | .381     | 2.188      | 1.759                | 1.642             |

All dimensions for reference only.

# PCB Hermetic Solder Mounting Receptacle

Commercial

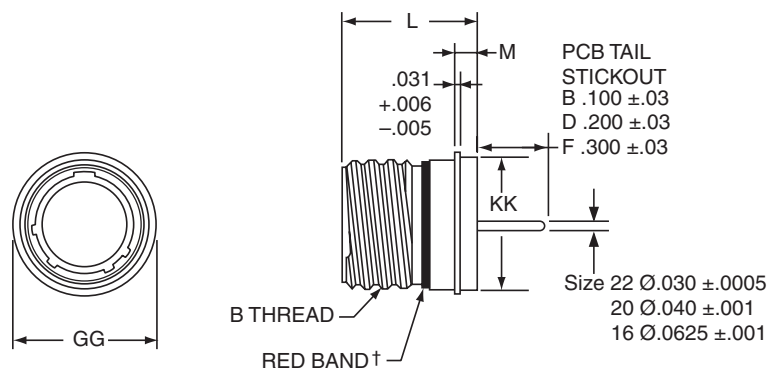

|                 | 1.                 | 2.                      | 3.                  | 4.                              | 5.                  | 6.                 |
|-----------------|--------------------|-------------------------|---------------------|---------------------------------|---------------------|--------------------|
| <b>PART #</b>   | <b>Base Number</b> | <b>Coded Shell Size</b> | <b>Insert Arrg.</b> | <b>Contact Type/Alt. Keying</b> | <b>Shell Finish</b> | <b>Tail Length</b> |
| See chart below | 10-626             | 481                     | -35                 | P                               | 1                   | B                  |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626**

Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail

### 2. CODED SHELL SIZE

See chart below **481-489**, designates size **9-25** shell size.

### 3. INSERT ARRANGEMENT

**-35**

Designates Insert Arrangement Number

Refer to insert availability chart on page 5-6.

### 4. CONTACT TYPE/ALTERNATE KEYING

**P**

Designates Pin Contacts in Normal Position

Refer to page 12 for alternate rotation letters to use.

### 5. SHELL FINISH

|          |                                                  |
|----------|--------------------------------------------------|
| <b>1</b> | Hermetic seal, passivated Stainless Steel, 200°C |
| <b>2</b> | Hermetic seal, Stainless Steel w/Nickel Plate    |
| <b>3</b> | Carbon Steel w/reflowed tin plate                |

### 6. TAIL LENGTH


|          |          |
|----------|----------|
| <b>B</b> | .100±.03 |
| <b>D</b> | .200±.03 |
| <b>F</b> | .300±.03 |

† Red band indicates fully mated

| Shell Size | Part Number            | B Thread Class<br>2A 0.1P-0.3L-<br>TS (Plated) | L<br>+.011<br>-.005 | M<br>+.006<br>-.005 | GG Dia.<br>+.011<br>-.010 | KK Dia<br>+.011<br>-.005 |
|------------|------------------------|------------------------------------------------|---------------------|---------------------|---------------------------|--------------------------|
| 9          | 10-626 <b>481</b> -XXX | .6250                                          | .806                | .125                | .750                      | .672                     |
| 11         | <b>482</b> -XXX        | .7500                                          | .806                | .125                | .844                      | .781                     |
| 13         | <b>483</b> -XXX        | .8750                                          | .806                | .125                | .969                      | .906                     |
| 15         | <b>484</b> -XXX        | 1.0000                                         | .806                | .125                | 1.094                     | 1.031                    |
| 17         | <b>485</b> -XXX        | 1.1875                                         | .806                | .125                | 1.218                     | 1.156                    |
| 19         | <b>486</b> -XXX        | 1.2500                                         | .806                | .125                | 1.312                     | 1.250                    |
| 21         | <b>487</b> -XXX        | 1.3750                                         | .806                | .125                | 1.438                     | 1.375                    |
| 23         | <b>488</b> -XXX        | 1.5000                                         | .838                | .156                | 1.563                     | 1.500                    |
| 25         | <b>489</b> -XXX        | 1.6250                                         | .838                | .156                | 1.688                     | 1.625                    |

# PCB Hermetic Weld Mounting Receptacle

Commercial

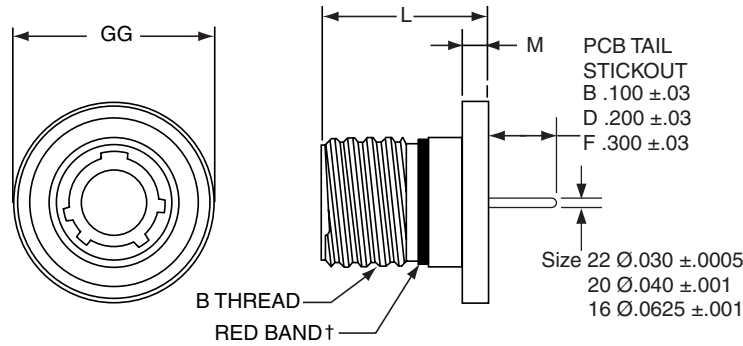

† Red band indicates fully mated

|                 | 1.          | 2.               | 3.           | 4.                       | 5.           | 6.          |
|-----------------|-------------|------------------|--------------|--------------------------|--------------|-------------|
| PART #          | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/Alt. Keying | Shell Finish | Tail Length |
| See chart below | 10-626      | 491              | -35          | P                        | 1            | B           |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626**

Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail

### 2. CODED SHELL SIZE

See chart below **491-499**, designates size **9-25** shell size.

### 3. INSERT ARRANGEMENT

**-35**

Designates Insert Arrangement Number

### 4. CONTACT TYPE/ALTERNATE KEYING

**P**

Designates Pin Contacts in Normal Position

Refer to insert availability chart on page 5-6.

Refer to page 12 for alternate rotation letters to use.

### 5. SHELL FINISH

**1**

Hermetic seal, passivated Stainless Steel, 200°C

**2**

Hermetic seal, Stainless Steel w/Nickel Plate

**3**

Carbon Steel w/reflowed tin plate

### 6. TAIL LENGTH

**B**

.100±.03

**D**

.200±.03

**F**

.300±.03

| Shell Size | Part Number            | B Thread Class 2A<br>0.1P-0.3L-TS<br>(Plated) | L<br>+.011<br>-.000 | M<br>+.006<br>-.005 | GG Dia.<br>+.011<br>-.010 |
|------------|------------------------|-----------------------------------------------|---------------------|---------------------|---------------------------|
| 9          | 10-626 <b>491</b> -XXX | .6250                                         | .806                | .125                | .973                      |
| 11         | <b>492</b> -XXX        | .7500                                         | .806                | .125                | 1.095                     |
| 13         | <b>493</b> -XXX        | .8750                                         | .806                | .125                | 1.221                     |
| 15         | <b>494</b> -XXX        | 1.0000                                        | .806                | .125                | 1.347                     |
| 17         | <b>495</b> -XXX        | 1.1875                                        | .806                | .125                | 1.434                     |
| 19         | <b>496</b> -XXX        | 1.2500                                        | .806                | .125                | 1.579                     |
| 21         | <b>497</b> -XXX        | 1.3750                                        | .806                | .125                | 1.721                     |
| 23         | <b>498</b> -XXX        | 1.5000                                        | .838                | .156                | 1.886                     |
| 25         | <b>499</b> -XXX        | 1.6250                                        | .838                | .156                | 1.973                     |


\* Not available for weld mount. All dimensions for reference only.



# Series II

## MIL-DTL-38999

Amphenol® JT Series subminiature cylindrical connectors are qualified to MIL-DTL-38999 Series II. These connectors were developed to meet the needs of the aerospace industry, and provided the impetus for development of the MIL-C-38999 specifications, which has been superseded by MIL-DTL-38999.



### FEATURES:

- Lightweight, Space Saving Design
- Contact Protection - 100% scoop-proof LJT design prevents bent pins and short circuits during mating
- Quick Positive Coupling - 3 point bayonet lock system
- Mismatching Eliminated - with 5 key/keyway design
- Error Proof Alternate Positioning - insured by different key/ keyway locations
- Hermetic - air leakage limited to  $1 \times 10^{-7}$  cm<sup>3</sup> per second
- Inventory Support Commonality - uses standard MIL-DTL-38999 contacts, insert arrangements and application tools.
- RoHS Compliant Product Available -Consult Amphenol Aerospace Operations.

# Military to Commercial Shell Style Conversion Table

## How to Order (Military)

| MILITARY       | DESCRIPTION                         | COMMERCIAL         |
|----------------|-------------------------------------|--------------------|
| <b>MS27475</b> | Hermetic Wall Mounting Receptacle   | <b>JT00</b>        |
| <b>MS27476</b> | Hermetic Box Mounting Receptacle    | <b>JT02, JTS02</b> |
| <b>MS27477</b> | Hermetic Jam Nut Receptacle         |                    |
| <b>MS27478</b> | Hermetic Solder Mounting Receptacle | <b>JTSIY</b>       |

## HOW TO ORDER - MILITARY SERIES II

| 1.<br>MS Number | 2.<br>Service Class | 3.<br>Shell Size | 4.<br>Finishes | 5.<br>Insert Arrangement | 6.<br>Contact Style | 7.<br>Alternate Keying Position |
|-----------------|---------------------|------------------|----------------|--------------------------|---------------------|---------------------------------|
| <b>MS27475</b>  | <b>Y</b>            | <b>14</b>        | <b>A</b>       | <b>18</b>                | <b>P</b>            | <b>A</b>                        |

### 1. MS NUMBER SERIES II JT

|                |                                     |
|----------------|-------------------------------------|
| <b>MS27475</b> | Hermetic Wall Mounting Receptacle   |
| <b>MS27476</b> | Hermetic Box Mounting Receptacle    |
| <b>MS27477</b> | Hermetic Jam Nut Receptacle         |
| <b>MS27478</b> | Hermetic Solder Mounting Receptacle |

### 2. HERMETIC SERVICE CLASS

|          |                                |
|----------|--------------------------------|
| <b>Y</b> | Hermetic with interfacial seal |
|----------|--------------------------------|

### 3. SHELL SIZE & 5. INSERT ARRANGEMENT

See table on page 5-6


Shell Size & Insert Arrangement are on pages 5-6. First number represents Shell Size, second number is the Insert Arrangement. Place Shell Size in box 3 and Insert Arrangement in box 5.

### 4. HERMETIC FINISHES

| Finish                                   | Military Finish Data |
|------------------------------------------|----------------------|
| Carbon steel shell tin plated & contacts | <b>D</b>             |
| Stainless steel shell passivated         | <b>E</b>             |
| Stainless steel nickel plated            | <b>N</b>             |

### 6. CONTACTS

|          |                       |
|----------|-----------------------|
| <b>P</b> | Pin Contacts - Solder |
| <b>X</b> | Pin Contacts - Eyelet |



### JT Key/Keyway Rotation

| AB ANGLE OF ROTATION (Degrees) |        |     |     |      |      |
|--------------------------------|--------|-----|-----|------|------|
| Shell Size                     | Normal | A   | B   | C    | D    |
| 8                              | 100°   | 82° | -   | -    | 118° |
| 10                             | 100°   | 86° | 72° | 128° | 114° |
| 12                             | 100°   | 80° | 68° | 132° | 120° |
| 14                             | 100°   | 79° | 66° | 134° | 121° |
| 16                             | 100°   | 82° | 70° | 130° | 118° |
| 18                             | 100°   | 82° | 70° | 130° | 118° |
| 20                             | 100°   | 82° | 70° | 130° | 118° |
| 22                             | 100°   | 85° | 74° | 126° | 115° |
| 24                             | 100°   | 85° | 74° | 126° | 115° |

### 7. ALTERNATE KEYING POSITION

"A" designates Alternate keying connector assembly. Other basic alternate keys are "B", "C" and "D". No letter required for normal rotation (no rotation) position.

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The AB angle for a given connector is the same whether it contains pins or sockets. Only the master key/keyway rotates in the shell, and the minor keys are fixed.

AB angles shown are viewed from the front face of the connector, a receptacle is shown below. The angles for the plug are exactly the same except the direction of rotation is opposite of that shown for the receptacle.

The "N" designation is not referenced in part number, it is omitted.

| 1.           | 2.            | 3.                      | 4.            | 5.                        | 6.                      |
|--------------|---------------|-------------------------|---------------|---------------------------|-------------------------|
| Type & Style | Service Class | Shell Size-Insert Arrg. | Contact Style | Alternate Keying Position | Finish Variation Suffix |
| <b>JT00</b>  | Y             | 9-35                    | P             | A                         | (SR)                    |

| 2. HERMETIC SERVICE CLASS |                                                                                                                                                                     |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Y</b>                  | Hermetic with interfacial seal                                                                                                                                      |
| <b>H</b>                  | Hermetic applications- Fused compression glass sealed inserts. Leakage rate less than .01 micron cu. ft./hr. (1 x 10 <sup>-7</sup> cc/sec.) at 15 psi differential. |

| 3. SHELL SIZE & INSERT ARRANGEMENTS                                                                 |
|-----------------------------------------------------------------------------------------------------|
| See table on page 5-6. First number represents Shell Size, second number is the Insert Arrangement. |


| 4. CONTACTS                    |
|--------------------------------|
| <b>P</b> Pin Contacts - Solder |

| 5. ALTERNATE KEYING POSITION                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "A" designates Alternate keying connector assembly. Other basic alternate keys are "B", "C" and "D". No letter required for normal rotation (no rotation) position. |

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The AB angle for a given connector is the same whether it contains pins or sockets. Only the master key/keyway rotates in the shell, and the minor keys are fixed.

AB angles shown are viewed from the front face of the connector, a receptacle is shown below. The angles for the plug are exactly the same except the direction of rotation is opposite of that shown for the receptacle.

The "N" designation is not referenced in part number, it is omitted.



### JT Key/Keyway Rotation

| AB ANGLE OF ROTATION (Degrees) |        |     |     |      |      |
|--------------------------------|--------|-----|-----|------|------|
| Shell Size                     | Normal | A   | B   | C    | D    |
| 8                              | 100°   | 82° | -   | -    | 118° |
| 10                             | 100°   | 86° | 72° | 128° | 114° |
| 12                             | 100°   | 80° | 68° | 132° | 120° |
| 14                             | 100°   | 79° | 66° | 134° | 121° |
| 16                             | 100°   | 82° | 70° | 130° | 118° |
| 18                             | 100°   | 82° | 70° | 130° | 118° |
| 20                             | 100°   | 82° | 70° | 130° | 118° |
| 22                             | 100°   | 85° | 74° | 126° | 115° |
| 24                             | 100°   | 85° | 74° | 126° | 115° |

| 6. HERMETIC FINISHES                     |               |
|------------------------------------------|---------------|
| Finish                                   | Finish Suffix |
| Carbon steel shell tin plated & contacts | <b>(468)</b>  |
| Stainless steel shell passivated         | <b>(162)</b>  |
| Stainless steel nickel plated            | <b>( )</b>    |

# Wall Mounting Receptacle -Hermetic


Military (MS27475 & MS27482), Commercial (JT00 & JTS00)

PART NUMBER BUILDER Page 22-23

**MILITARY**  
MS27475Y  
MS27482Y

**COMMERCIAL**  
JT00H, JT00Y  
JTS00Y

| Shell Size | L Max. | N<br>+.001<br>-.005 | R (TP) | S ±.016 | T<br>±.005 | V Thread Class<br>2A |
|------------|--------|---------------------|--------|---------|------------|----------------------|
| 8          | .234   | .473                | .594   | .812    | .120       | .5625-24UNEF         |
| 10         | .234   | .590                | .719   | .938    | .120       | .6875-24UNEF         |
| 12         | .234   | .750                | .812   | 1.031   | .120       | .8125-20UNEF         |
| 14         | .234   | .875                | .906   | 1.125   | .120       | .9375-20UNEF         |
| 16         | .234   | 1.000               | .969   | 1.219   | .120       | 1.0625-18UNEF        |
| 18         | .234   | 1.125               | 1.062  | 1.312   | .120       | 1.1875-18UNEF        |
| 20         | .234   | 1.250               | 1.156  | 1.438   | .120       | 1.3125-18UNEF        |
| 22         | .234   | 1.375               | 1.250  | 1.562   | .120       | 1.4375-18UNEF        |
| 24         | .313   | 1.500               | 1.375  | 1.688   | .147       | 1.5625-18UNEF        |

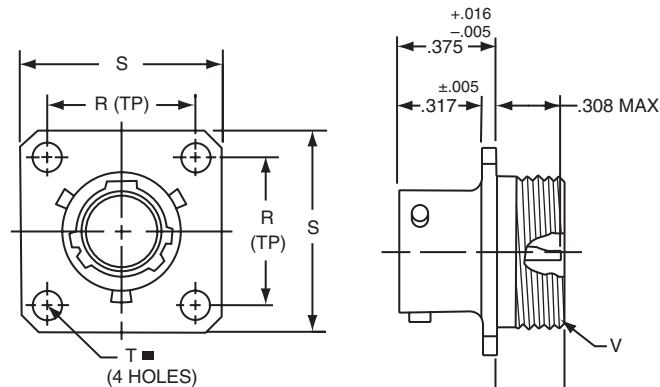

**COMMERCIAL**

\* JT00H-XX-XXX  
\*\* JT00Y-XX-XXX  
\*\*\* JTS00Y-XX-XXX

**MILITARY**

MS27475YXXDXXX  
MS27482YXXEXXX

- \* Standard Junior Tri-Lock
- \*\* Interfacial seal wafer
- \*\*\* High temperature version, interfacial seal wafer with stainless steel shell

# Box Mounting Receptacle - Hermetic


Military (MS27476), Commercial (JT02 & JTS02)

PART NUMBER BUILDER Page 22-23

**MILITARY**  
MS27476Y

**COMMERCIAL**  
JT02H, JT02Y  
JTS02Y

| Shell Size | L<br>+.006<br>-.015 | N<br>+.001<br>-.005 | R (TP) | S ±.016 | T<br>±.005 | KK<br>+.001<br>-.005 |
|------------|---------------------|---------------------|--------|---------|------------|----------------------|
| 8          | .051                | .473                | .594   | .812    | .120       | .562                 |
| 10         | .051                | .590                | .719   | .938    | .120       | .672                 |
| 12         | .051                | .750                | .812   | 1.031   | .120       | .781                 |
| 14         | .051                | .875                | .906   | 1.125   | .120       | .906                 |
| 16         | .051                | 1.000               | .969   | 1.219   | .120       | 1.031                |
| 18         | .051                | 1.125               | 1.062  | 1.312   | .120       | 1.156                |
| 20         | .051                | 1.250               | 1.156  | 1.438   | .120       | 1.250                |
| 22         | .080                | 1.375               | 1.250  | 1.562   | .120       | 1.375                |
| 24         | .080                | 1.500               | 1.375  | 1.688   | .147       | 1.500                |

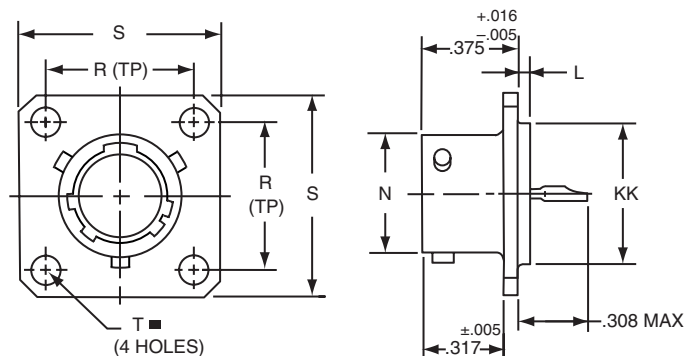

**COMMERCIAL**

\* JT02H-XX-XXX  
\*\* JT02Y-XX-XXX  
\*\*\* JTS02Y-XX-XXX

**MILITARY**

MS27476YXXDXXX  
MS27476YXXEXXX

- \* Standard Junior Tri-Lock
- \*\* Interfacial seal wafer
- \*\*\* High temperature version, interfacial seal wafer with stainless steel shell

All dimensions for reference only.



# Jam Nut Receptacle - Hermetic

Military (MS27477 & MS27483), Commercial (JT07 & JTS07)

PART NUMBER BUILDER Page 22-23

**MILITARY**  
**MS27477Y**  
**MS27483Y**

**COMMERCIAL**  
**JT07H, JT07Y**  
**JTS07Y**

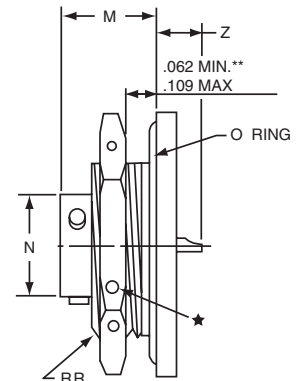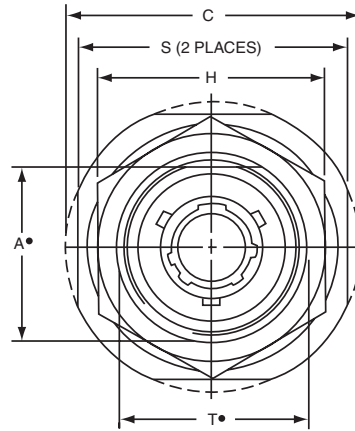

- \* Standard Junior Tri-Lock
- ★ .059 Dia. Min. 3 lockwire holes. Formed lockwire hole design (6 holes) is optional.
- + "D" shaped mounting hole dimensions.
- \*\* Panel Thickness
- \*\*\* Interfacial seal wafer
- \*\*\*\* High temperature version, interfacial seal wafer with stainless steel shell

**COMMERCIAL**

\* JT07H-XX-XXX

\*\*\* JT07Y-XX-XX

\*\*\*\* JTS07Y-XX-XXX

**MILITARY**

**MS27477YXXDXXX**

**MS27483YXXEXXX**

| Shell Size | A+<br>+.000<br>-.010 | C<br>Max. | H<br>+.017<br>-.016 | M<br>±.005 | N<br>+.001<br>-.005 | S<br>±.016 | T+<br>+.010<br>-.000 | Z Max. | RR Thread<br>Class 2A |
|------------|----------------------|-----------|---------------------|------------|---------------------|------------|----------------------|--------|-----------------------|
| 8          | .830                 | 1.390     | 1.062               | .438       | .473                | 1.250      | .884                 | .244   | .8750-20UNEF          |
| 10         | .955                 | 1.515     | 1.188               | .438       | .590                | 1.375      | 1.007                | .244   | 1.0000-20UNEF         |
| 12         | 1.084                | 1.640     | 1.312               | .438       | .750                | 1.500      | 1.134                | .244   | 1.1250-18UNEF         |
| 14         | 1.208                | 1.765     | 1.438               | .438       | .875                | 1.625      | 1.259                | .244   | 1.2500-18UNEF         |
| 16         | 1.333                | 1.953     | 1.562               | .438       | 1.000               | 1.781      | 1.384                | .244   | 1.3750-18UNEF         |
| 18         | 1.459                | 2.031     | 1.688               | .438       | 1.125               | 1.890      | 1.507                | .244   | 1.5000-18UNEF         |
| 20         | 1.576                | 2.156     | 1.812               | .464       | 1.250               | 2.016      | 1.634                | .218   | 1.6250-18UNEF         |
| 22         | 1.701                | 2.280     | 2.000               | .464       | 1.375               | 2.140      | 1.759                | .218   | 1.7500-18UNS          |
| 24         | 1.826                | 2.405     | 2.125               | .464       | 1.500               | 2.265      | 1.884                | .218   | 1.8750-16UN           |

# Solder Mounting Receptacle - Hermetic

Military (MS27478 & MS27503), Commercial (JTI & JTSI)

PART NUMBER BUILDER Page 22-23

**MILITARY**  
**MS27478Y**  
**MS27503Y**

**COMMERCIAL**  
**JTIH, JTIY**  
**JTSIY**

**COMMERCIAL**

\* JTIH-XX-XXX



\*\* JTIY-XX-XX

\*\*\* JTSIY-XX-XXX

**MILITARY**

**MS27478YXXDXXX**

**MS27503YXXEXXX**

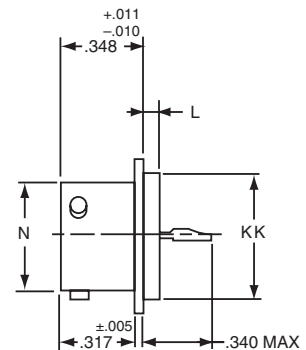


| Shell Size | L<br>+.011<br>-.010 | N<br>+.001<br>-.005 | GG<br>+.011<br>-.010 | KK<br>+.001<br>-.005 |
|------------|---------------------|---------------------|----------------------|----------------------|
| 8          | .078                | .473                | .687                 | .562                 |
| 10         | .078                | .590                | .797                 | .672                 |
| 12         | .078                | .750                | .906                 | .781                 |
| 14         | .078                | .875                | 1.031                | .906                 |
| 16         | .078                | 1.000               | 1.156                | 1.031                |
| 18         | .078                | 1.125               | 1.281                | 1.156                |
| 20         | .078                | 1.250               | 1.375                | 1.250                |
| 22         | .107                | 1.375               | 1.500                | 1.375                |
| 24         | .107                | 1.500               | 1.625                | 1.500                |

- \* Standard Junior Tri-Lock
- \*\* Interfacial seal wafer
- \*\*\* High temperature version, interfacial seal wafer with stainless steel shell

All dimensions for reference only. Weld mounting hermetic receptacle also available. Consult Amphenol Aerospace for availability and dimensions.

# PCB Wall Mounting Receptacle Hermetic

Commercial (JT00)

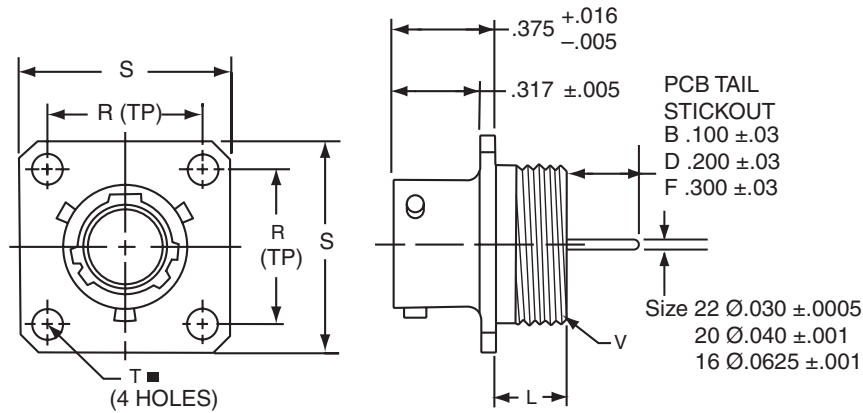

|                 | 1.          | 2.               | 3.           | 4.                                | 5.           | 6.          |
|-----------------|-------------|------------------|--------------|-----------------------------------|--------------|-------------|
| PART #          | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/Alt. Keying Position | Shell Finish | Tail Length |
| See chart below | 10-626      | 431              | -35          | P                                 | 1            | B           |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626** Base Number for MIL-DTL-38999 Series II Hermetic with PCB Tail

### 2. CODED SHELL SIZE

See chart below **431-439**, designates size 9-25 shell size. Example: **431** = Size 9 Shell

### 3. INSERT ARRANGEMENT

**-35** Insert Arrangement Number. Refer to insert availability chart on page 5-6.

### 4. CONTACT TYPE/ALTERNATE KEYING

**P** Designates Pin Contacts in Normal Position. Refer to page 22 for alternate rotation letters to use.

### 5. SHELL FINISH

- 1** Hermetic seal, passivated Stainless Steel, 200°C
- 2** Hermetic seal, Stainless Steel w/Nickel Plate
- 3** Carbon Steel w/reflowed tin plate

### 6. TAIL LENGTH


- B** .100±.03
- D** .200±.03
- F** .300±.03

⊕ .005 DIA (M)

| Shell Size | Part Number            | L Max. | N +.001 / -.005 | R (TP) | S ±.016 | T ±.005 | V Thread Class 2A |
|------------|------------------------|--------|-----------------|--------|---------|---------|-------------------|
| 8          | 10-626 <b>431</b> -XXX | .234   | .473            | .594   | .812    | .120    | .5625-24UNEF      |
| 10         | <b>432</b> -XXX        | .234   | .590            | .719   | .938    | .120    | .6875-24UNEF      |
| 12         | <b>433</b> -XXX        | .234   | .750            | .812   | 1.031   | .120    | .8125-20UNEF      |
| 14         | <b>434</b> -XXX        | .234   | .875            | .906   | 1.125   | .120    | .9375-20UNEF      |
| 16         | <b>435</b> -XXX        | .234   | 1.000           | .969   | 1.219   | .120    | 1.0625-18UNEF     |
| 18         | <b>436</b> -XXX        | .234   | 1.125           | 1.062  | 1.312   | .120    | 1.1875-18UNEF     |
| 20         | <b>437</b> -XXX        | .234   | 1.250           | 1.156  | 1.438   | .120    | 1.3125-18UNEF     |
| 22         | <b>438</b> -XXX        | .234   | 1.375           | 1.250  | 1.562   | .120    | 1.4375-18UNEF     |
| 24         | <b>439</b> -XXX        | .313   | 1.500           | 1.375  | 1.688   | .147    | 1.5625-18UNEF     |

# PCB Box Mounting Receptacle Hermetic

Commercial JT02

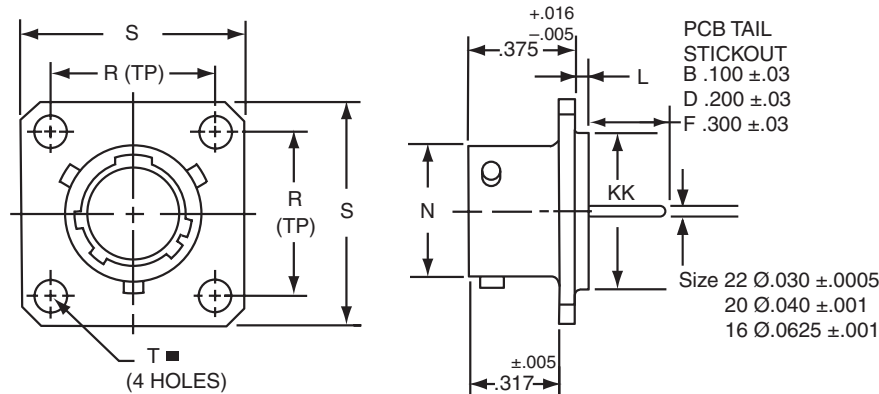

|                 | 1.                 | 2.                      | 3.                  | 4.                                       | 5.                  | 6.                 |
|-----------------|--------------------|-------------------------|---------------------|------------------------------------------|---------------------|--------------------|
| <b>PART #</b>   | <b>Base Number</b> | <b>Coded Shell Size</b> | <b>Insert Arrg.</b> | <b>Contact Type/Alt. Keying Position</b> | <b>Shell Finish</b> | <b>Tail Length</b> |
| See chart below | 10-626             | 461                     | -35                 | P                                        | 1                   | B                  |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626** Base Number for MIL-DTL-38999 Series II Hermetic with PCB Tail

### 2. CODED SHELL SIZE

See chart below **461-469**, designates size 9-25 shell size. Example: **461** = Size 9 Shell

### 3. INSERT ARRANGEMENT

**-35** Insert Arrangement Number. Refer to insert availability chart on page 5-6.

### 4. CONTACT TYPE/ALTERNATE KEYING

**P** Designates Pin Contacts in Normal Position. Refer to page 22 for alternate rotation letters to use.

### 5. SHELL FINISH

**1** Hermetic seal, passivated Stainless Steel, 200°C  
**2** Hermetic seal, Stainless Steel w/Nickel Plate  
**3** Carbon Steel w/reflowed tin plate

### 6. TAIL LENGTH

**B** .100±.03  
**D** .200±.03  
**F** .300±.03

⊕ .005 DIA (M)


| Shell Size | Part Number            | L<br>+.006<br>-.015 | N<br>+.001<br>-.005 | R (TP) | S<br>±.016 | T<br>±.005 | KK<br>+.001<br>-.005 |
|------------|------------------------|---------------------|---------------------|--------|------------|------------|----------------------|
| 8          | 10-626 <b>461</b> -XXX | .051                | .473                | .594   | .812       | .120       | .562                 |
| 10         | <b>462</b> -XXX        | .051                | .590                | .719   | .938       | .120       | .672                 |
| 12         | <b>463</b> -XXX        | .051                | .750                | .812   | 1.031      | .120       | .781                 |
| 14         | <b>464</b> -XXX        | .051                | .875                | .906   | 1.125      | .120       | .906                 |
| 16         | <b>465</b> -XXX        | .051                | 1.000               | .969   | 1.219      | .120       | 1.031                |
| 18         | <b>466</b> -XXX        | .051                | 1.125               | 1.062  | 1.312      | .120       | 1.156                |
| 20         | <b>467</b> -XXX        | .051                | 1.250               | 1.156  | 1.438      | .120       | 1.250                |
| 22         | <b>468</b> -XXX        | .080                | 1.375               | 1.250  | 1.562      | .120       | 1.375                |
| 24         | <b>469</b> -XXX        | .080                | 1.500               | 1.375  | 1.688      | .147       | 1.500                |

All dimensions for reference only.



# PCB Jam Nut Receptacle Hermetic

Commercial (JT07)

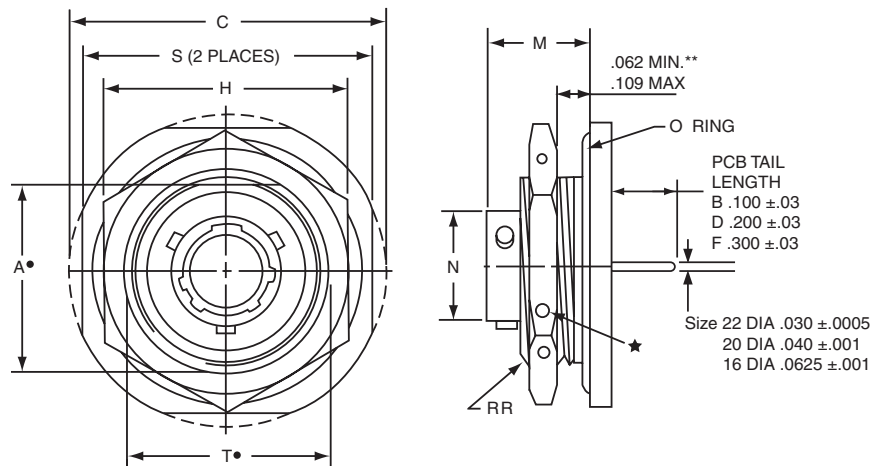

|                           | 1.          | 2.               | 3.           | 4.                                    | 5.           | 6.          |
|---------------------------|-------------|------------------|--------------|---------------------------------------|--------------|-------------|
| PART #<br>See chart below | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/<br>Alt. Keying Position | Shell Finish | Tail Length |
|                           | 10-626      | 441              | -35          | P                                     | 1            | B           |

## HOW TO ORDER

| 1. BASE NUMBER                                                                                   | 2. CODED SHELL SIZE                                                                                          |
|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>10-626</b> Base Number for MIL-DTL-38999 Series II Hermetic with PCB Tail                     | See chart below <b>441-449</b> , designates size 9-25 shell size. Example: <b>441</b> = Size 9 Shell         |
| 3. INSERT ARRANGEMENT                                                                            | 4. CONTACT TYPE/ALTERNATE KEYING                                                                             |
| <b>-35</b> Designates Insert Arrangement Number. Refer to insert availability chart on page 5-6. | <b>P</b> Designates Pin Contacts in Normal Position. Refer to page 22 for alternate rotation letters to use. |
| 5. SHELL FINISH                                                                                  | 6. TAIL LENGTH                                                                                               |
| <b>1</b> Hermetic seal, passivated Stainless Steel, 200°C                                        | <b>B</b> .100±.03                                                                                            |
| <b>2</b> Hermetic seal, Stainless Steel w/Nickel Plate                                           | <b>D</b> .200±.03                                                                                            |
| <b>3</b> Carbon Steel w/reflowed tin plate                                                       | <b>F</b> .300±.03                                                                                            |


| Shell Size | Part Number            | A+<br>+.000<br>-.010 | C<br>Max. | H<br>+.017<br>-.016 | M<br>±.005 | N +.001<br>-.005 | S<br>±.016 | T+<br>+.010<br>-.000 | RR Thread<br>Class 2A |
|------------|------------------------|----------------------|-----------|---------------------|------------|------------------|------------|----------------------|-----------------------|
| 8          | 10-626 <b>441</b> -XXX | .830                 | 1.390     | 1.062               | .438       | .473             | 1.250      | .884                 | .8750-20UNEF          |
| 10         | <b>442</b> -XXX        | .955                 | 1.515     | 1.188               | .438       | .590             | 1.375      | 1.007                | 1.0000-20UNEF         |
| 12         | <b>443</b> -XXX        | 1.084                | 1.640     | 1.312               | .438       | .750             | 1.500      | 1.134                | 1.1250-18UNEF         |
| 14         | <b>444</b> -XXX        | 1.208                | 1.765     | 1.438               | .438       | .875             | 1.625      | 1.259                | 1.2500-18UNEF         |
| 16         | <b>445</b> -XXX        | 1.333                | 1.953     | 1.562               | .438       | 1.000            | 1.781      | 1.384                | 1.3750-18UNEF         |
| 18         | <b>446</b> -XXX        | 1.459                | 2.031     | 1.688               | .438       | 1.125            | 1.890      | 1.507                | 1.5000-18UNEF         |
| 20         | <b>447</b> -XXX        | 1.576                | 2.156     | 1.812               | .464       | 1.250            | 2.016      | 1.634                | 1.6250-18UNEF         |
| 22         | <b>448</b> -XXX        | 1.701                | 2.280     | 2.000               | .464       | 1.375            | 2.140      | 1.759                | 1.7500-18UNS          |
| 24         | <b>449</b> -XXX        | 1.826                | 2.405     | 2.125               | .464       | 1.500            | 2.265      | 1.884                | 1.8750-16UN           |

★ .059 Dia. Min. 3 lockwire holes. Formed lockwire hole design (6 holes) is optional.  
+ "D" shaped mounting hole dimensions.  
\*\* Panel Thickness

All dimensions for reference only.

# PCB Solder Mounting Receptacle Hermetic

Commercial (JTI)

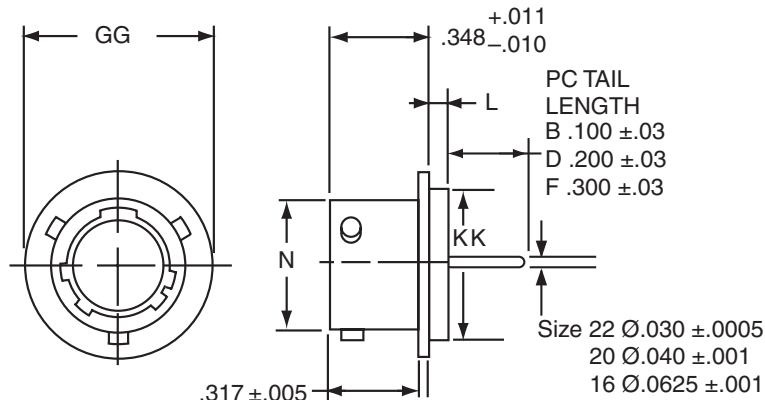

|                 | 1.          | 2.               | 3.           | 4.                                    | 5.           | 6.          |
|-----------------|-------------|------------------|--------------|---------------------------------------|--------------|-------------|
| <b>PART #</b>   | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/<br>Alt. Keying Position | Shell Finish | Tail Length |
| See chart below | 10-626      | 451              | -35          | P                                     | 1            | B           |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626** Base Number for MIL-DTL-38999 Series II Hermetic with PCB Tail

### 2. CODED SHELL SIZE

See chart below **451-459**, designates size 9-25 shell size. Example: **451** = Size 9 Shell

### 3. INSERT ARRANGEMENT

**-35** Insert Arrangement Number. Refer to insert availability chart on page 5-6.

### 4. CONTACT TYPE/ALTERNATE KEYING

**P** Designates Pin Contacts in Normal Position. Refer to page 22 for alternate rotation letters to use.

### 5. SHELL FINISH

|          |                                                  |
|----------|--------------------------------------------------|
| <b>1</b> | Hermetic seal, passivated Stainless Steel, 200°C |
| <b>2</b> | Hermetic seal, Stainless Steel w/Nickel Plate    |
| <b>3</b> | Carbon Steel w/reflowed tin plate                |

### 6. TAIL LENGTH

|          |          |
|----------|----------|
| <b>B</b> | .100±.03 |
| <b>D</b> | .200±.03 |
| <b>F</b> | .300±.03 |

| Shell Size | Part Number            | L<br>+.011<br>-.010 | N<br>+.001<br>-.005 | GG<br>+.011<br>-.010 | KK<br>+.001<br>-.005 |
|------------|------------------------|---------------------|---------------------|----------------------|----------------------|
| 8          | 10-626 <b>451</b> -XXX | .078                | .473                | .687                 | .562                 |
| 10         | <b>452</b> -XXX        | .078                | .590                | .797                 | .672                 |
| 12         | <b>453</b> -XXX        | .078                | .750                | .906                 | .781                 |
| 14         | <b>454</b> -XXX        | .078                | .875                | 1.031                | .906                 |
| 16         | <b>455</b> -XXX        | .078                | 1.000               | 1.156                | 1.031                |
| 18         | <b>456</b> -XXX        | .078                | 1.125               | 1.281                | 1.156                |
| 20         | <b>457</b> -XXX        | .078                | 1.250               | 1.375                | 1.250                |
| 22         | <b>458</b> -XXX        | .107                | 1.375               | 1.500                | 1.375                |
| 24         | <b>459</b> -XXX        | .107                | 1.500               | 1.625                | 1.500                |

All dimensions for reference only.  
Weld mounting hermetic receptacle also available.  
Consult Amphenol Aerospace for availability and dimensions.



#### FEATURES:

- **Lightweight, Space Saving Design**
- **Contact Protection**  
100% scoop-proof LJT design prevents bent pins and short circuits during mating
- **Quick Positive Coupling**  
3 point bayonet lock system
- **Mismatching Eliminated**  
With 5 key/keyway design
- **Error Proof Alternate Positioning**  
insured by different key/keyway locations
- **Fixed Solder Contacts**  
Amphenol MIL-DTL-38999 Series I LJT are available in solder versions as both Commercial and Military qualified to MIL-DTL-27599
- **Hermetic**  
Air leakage limited to  $1 \times 10^{-7}$  cm<sup>3</sup> per second
- **Inventory Support Commonality**  
Uses standard MIL-DTL-38999 contacts, insert arrangements and application tools.
- **RoHS Compliant Product Available**  
Consult Amphenol Aerospace Operations.

# Series I

## MIL-DTL-38999

Amphenol® LJT Series subminiature cylindrical connectors are qualified to MIL-DTL-38999 Series I. These connectors were developed to meet the needs of the aerospace industry, and provided the impetus for development of the MIL-C-38999 specifications, which has been superseded by MIL-DTL-38999.

# Military to Commercial Shell Style Conversion Table

## How to Order (Military)

| MILITARY       | DESCRIPTION                         | COMMERCIAL                  |
|----------------|-------------------------------------|-----------------------------|
| <b>MS27469</b> | Hermetic Wall Mounting Receptacle   | <b>LJT00, LJTS00</b>        |
| <b>MS27470</b> | Hermetic Jam Nut Receptacle         | <b>LJT07, LJTS07</b>        |
| <b>MS27471</b> | Hermetic Solder Mounting Receptacle | <b>LJTIH, LJTIY, LJTSIY</b> |

### HOW TO ORDER - Military Series I

| 1.<br>MS Number | 2.<br>Service Class | 3.<br>Shell Size | 4.<br>Finishes | 5.<br>Insert Arrangement | 6.<br>Contact Style | 7.<br>Alternate Keying Position |
|-----------------|---------------------|------------------|----------------|--------------------------|---------------------|---------------------------------|
| <b>MS27469</b>  | <b>Y</b>            | <b>14</b>        | <b>N</b>       | <b>18</b>                | <b>P</b>            | <b>A</b>                        |

#### 1. MS NUMBER SERIES I LJT

|                |                                     |
|----------------|-------------------------------------|
| <b>MS27469</b> | Hermetic Wall Mounting Receptacle   |
| <b>MS27470</b> | Hermetic Jam Nut Receptacle         |
| <b>MS27471</b> | Hermetic Solder Mounting Receptacle |

#### 2. HERMETIC SERVICE CLASS

|          |                                |
|----------|--------------------------------|
| <b>Y</b> | Hermetic with interfacial seal |
|----------|--------------------------------|

#### 3. SHELL SIZE

See table on page 5-6

Shell Size & Insert Arrangement are on pages 5-6. First number represents Shell Size, second number is the Insert Arrangement. Place Shell Size in box 3 and Insert Arrangement in box 5.

#### 4. HERMETIC FINISHES

| Finish                                   | Military Finish Data |
|------------------------------------------|----------------------|
| Carbon steel shell tin plated & contacts | <b>D</b>             |
| Stainless steel shell passivated         | <b>E</b>             |
| Stainless steel nickel plated            | <b>N</b>             |

#### 5. INSERT ARRANGEMENT

See table on page 5-6

#### 6. CONTACTS

|          |                       |
|----------|-----------------------|
| <b>P</b> | Pin Contacts-Solder   |
| <b>X</b> | Pin Contacts - Eyelet |

#### 7. ALTERNATE KEYING POSITION


"A" designates Alternate keying connector assembly. Other basic alternate keys are "B", "C" and "D". No letter required for normal rotation (no rotation) position.

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The AB angle for a given connector is the same whether it contains pins or sockets. Only the master key/keyway rotates in the shell, and the minor keys are fixed. AB angles shown are viewed from the front face of the connector, a receptacle is shown below. The angles for the plug are exactly the same except the direction of rotation is opposite of that shown for the receptacle.

The "N" designation is not referenced in part number, it is omitted.

#### LJT Key/Keyway Rotation

| AB ANGLE OF ROTATION (Degrees) |        |     |     |      |      |
|--------------------------------|--------|-----|-----|------|------|
| Shell Size                     | Normal | A   | B   | C    | D    |
| 9                              | 95°    | 77° | -   | -    | 113° |
| 11                             | 95°    | 81° | 67° | 123° | 109° |
| 13                             | 95°    | 75° | 63° | 127° | 115° |
| 15                             | 95°    | 74° | 61° | 129° | 116° |
| 17                             | 95°    | 77° | 65° | 125° | 113° |
| 19                             | 95°    | 77° | 65° | 125° | 113° |
| 21                             | 95°    | 77° | 65° | 125° | 113° |
| 23                             | 95°    | 80° | 69° | 121° | 110° |
| 25                             | 95°    | 80° | 69° | 121° | 110° |

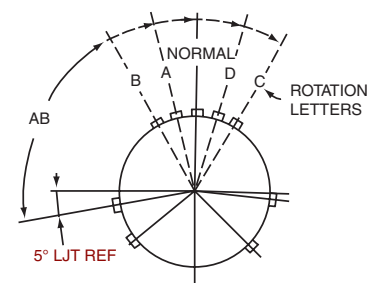

RELATIVE POSSIBLE POSITION OF ROTATED MASTER KEYWAY (front face of receptacle shown)

# MIL-DTL-38999/ 27599, Series I LJT

## How to Order (Commercial)

| 1.            | 2.            | 3.                          | 4.            | 5.                           | 6.                        |
|---------------|---------------|-----------------------------|---------------|------------------------------|---------------------------|
| Table & Style | Service Class | Shell Size<br>-Insert Arrg. | Contact Style | Alternate Keying<br>Position | Finish Variation Suffix** |
| <b>LJT00</b>  | <b>Y</b>      | <b>9-35</b>                 | <b>P</b>      | <b>B</b>                     | <b>(162)</b>              |

\*\* If Required

### 1. SERIES AND STYLE

|          |                            | Long Junior<br>Tri-Lock | High<br>Temperature | Chemical and Fuel<br>Resistant |
|----------|----------------------------|-------------------------|---------------------|--------------------------------|
| Hermetic | Wall Mounting Receptacle   | <b>LJT00</b>            | <b>LJTS00</b>       | <b>LJTN00</b>                  |
|          | Jam Nut Receptacle         | <b>LJT07</b>            | <b>LJTS07</b>       | <b>LJTN07</b>                  |
|          | Solder Mounting Receptacle | <b>LJTI</b>             | <b>LJTSI</b>        | <b>LJTNI</b>                   |

### 2. SERVICE CLASS HERMETIC

|          |                                                                                                                                                                     |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Y</b> | Same as "H" with interfacial seal.                                                                                                                                  |
| <b>H</b> | Hermetic applications- Fused compression glass sealed inserts. Leakage rate less than .01 micron cu. ft./hr. (1 x 10 <sup>-7</sup> cc/sec.) at 15 psi differential. |

### 3. SHELL SIZE & INSERT ARRANGEMENTS

See table on page 5-6

First number represents Shell Size, second number is the Insert Arrangement.

### 4. CONTACTS

|          |                       |
|----------|-----------------------|
| <b>P</b> | Pin Contacts - Solder |
|----------|-----------------------|

### 5. ALTERNATE KEYING POSITION

"A" designates Alternate keying connector assembly. Other basic alternate keys are "B", "C" and "D". No letter required for normal rotation (no rotation) position.


A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The AB angle for a given connector is the same whether it contains pins or sockets. Only the master key/keyway rotates in the shell, and the minor keys are fixed.

AB angles shown are viewed from the front face of the connector, a receptacle is shown below. The angles for the plug are exactly the same except the direction of rotation is opposite of that shown for the receptacle.

The "N" designation is not referenced in part number, it is omitted.

### LJT Key/Keyway Rotation

| AB ANGLE OF ROTATION (Degrees) |        |          |          |          |          |
|--------------------------------|--------|----------|----------|----------|----------|
| Shell Size                     | Normal | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> |
| 9                              | 95°    | 77°      | -        | -        | 113°     |
| 11                             | 95°    | 81°      | 67°      | 123°     | 109°     |
| 13                             | 95°    | 75°      | 63°      | 127°     | 115°     |
| 15                             | 95°    | 74°      | 61°      | 129°     | 116°     |
| 17                             | 95°    | 77°      | 65°      | 125°     | 113°     |
| 19                             | 95°    | 77°      | 65°      | 125°     | 113°     |
| 21                             | 95°    | 77°      | 65°      | 125°     | 113°     |
| 23                             | 95°    | 80°      | 69°      | 121°     | 110°     |
| 25                             | 95°    | 80°      | 69°      | 121°     | 110°     |

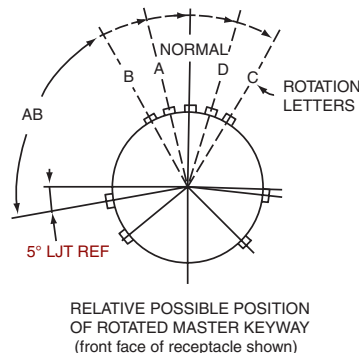

### 6. Hermetic FINISHES

| Finish                                   | Finish Suffix |
|------------------------------------------|---------------|
| Carbon steel shell tin plated & contacts | <b>(468)</b>  |
| Stainless steel shell passivated         | <b>(162)</b>  |
| Stainless steel nickel plated            | <b>( )</b>    |


# Wall Mounting Receptacle - Hermetic

Military (MS27469), Commercial (LJT00)

PART NUMBER BUILDER Page 31-32

**MILITARY**  
**MS27469Y**

**COMMERCIAL**  
**LJT00H, LJT00Y**  
**LJTS00Y**

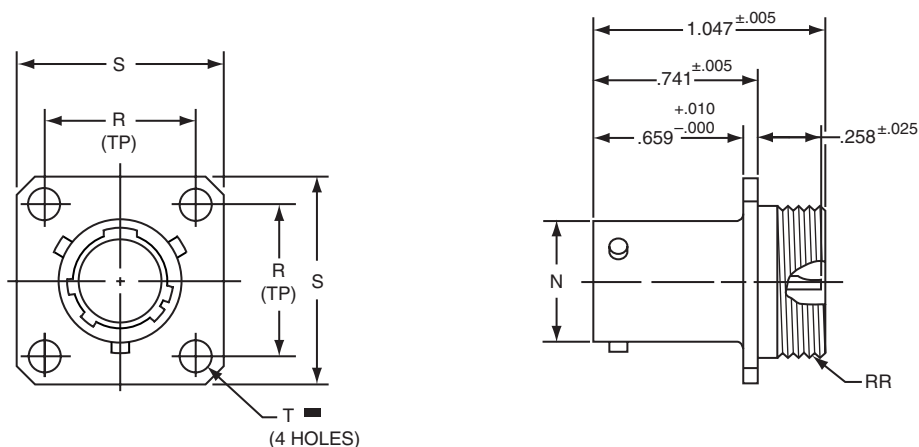


## COMMERCIAL

\* LJT00H-XX-XXX  
\*\* LJT00Y-XX-XXX  
\*\*\* LJTS00Y-XX-XXX

## MILITARY

MS27469YXXD  
MS27469YXXE



- \* Long Junior Tri-Lock
- \*\* Interfacial seal wafer
- \*\*\* High temperature version, interfacial seal wafer with stainless steel shell

| Shell Size | N Dia. +.001<br>-.005 | R (TP) | S ±.016 | T Dia. ±.005 | RR Thread Class 2A |
|------------|-----------------------|--------|---------|--------------|--------------------|
| 9          | .572                  | .719   | .938    | .128         | .6875-24 UNEF      |
| 11         | .700                  | .812   | 1.031   | .128         | .8125-20 UNEF      |
| 13         | .850                  | .906   | 1.125   | .128         | .9375-20 UNEF      |
| 15         | .975                  | .969   | 1.219   | .128         | 1.0625-18 UNEF     |
| 17         | 1.100                 | 1.062  | 1.312   | .128         | 1.1875-18 UNEF     |
| 19         | 1.207                 | 1.156  | 1.438   | .128         | 1.3125-18 UNEF     |
| 21         | 1.332                 | 1.250  | 1.562   | .128         | 1.4375-18 UNEF     |
| 23         | 1.457                 | 1.375  | 1.688   | .147         | 1.5625-18 UNEF     |
| 25         | 1.582                 | 1.500  | 1.812   | .147         | 1.6875-18 UNEF     |

All dimensions for reference only.



# Jam Nut Receptacle - Hermetic

Military (MS27470) Commercial (LJT07 & LJTS07)

PART NUMBER BUILDER Page 31-32

MILITARY  
MS27470Y

COMMERCIAL  
LJT07H, LJT07Y  
LJTS07Y

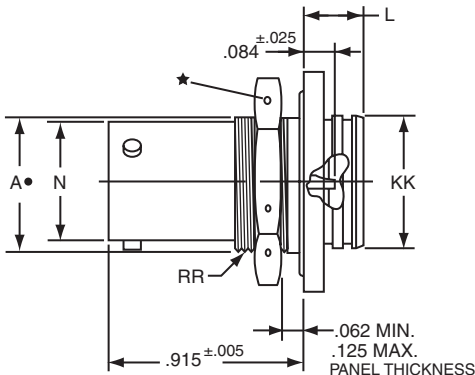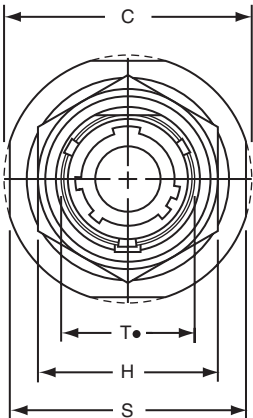

COMMERCIAL

MILITARY

\* LJT07H-XX-XXX  
\*\* LJT07Y-XX-XXX  
\*\*\* LJTS07Y-XX-XXX

MS27470YXXD  
MS27470YXXE

- ★ .059 Dia. Min. 3 lockwire holes.  
Formed lockwire hole design  
(6 holes) is optional.
- + "D" shaped mounting hole dimensions.
- \* Long Junior Tri-Lock
- \*\* Interfacial seal wafer
- \*\*\* High temperature version, interfacial seal wafer with stainless steel shell

| Shell Size | A+<br>+.000<br>-.010 | C Max. | H Hex<br>+.017<br>-.016 | L Max. | N<br>+.000<br>-.005 | S<br>±.016 | T+<br>+.010<br>-.000 | KK<br>+.011<br>-.000 | RR Thread<br>Class 2A (Plated) |
|------------|----------------------|--------|-------------------------|--------|---------------------|------------|----------------------|----------------------|--------------------------------|
| 9          | .669                 | 1.199  | .875                    | .297   | .572                | 1.062      | .697                 | .642                 | .6875-24 UNEF                  |
| 11         | .769                 | 1.386  | 1.000                   | .297   | .700                | 1.250      | .822                 | .766                 | .8125-20 UNEF                  |
| 13         | .955                 | 1.511  | 1.188                   | .297   | .850                | 1.375      | 1.007                | .892                 | 1.0000-20 UNEF                 |
| 15         | 1.084                | 1.636  | 1.312                   | .297   | .975                | 1.500      | 1.134                | 1.018                | 1.1250-18 UNEF                 |
| 17         | 1.208                | 1.761  | 1.438                   | .297   | 1.100               | 1.625      | 1.259                | 1.142                | 1.2500-18 UNEF                 |
| 19         | 1.333                | 1.949  | 1.562                   | .328   | 1.207               | 1.812      | 1.384                | 1.268                | 1.3750-18 UNEF                 |
| 21         | 1.459                | 2.073  | 1.688                   | .328   | 1.332               | 1.938      | 1.507                | 1.392                | 1.5000-18 UNEF                 |
| 23         | 1.580                | 2.199  | 1.812                   | .328   | 1.457               | 2.062      | 1.634                | 1.518                | 1.6250-18 UNEF                 |
| 25         | 1.709                | 2.328  | 2.000                   | .328   | 1.582               | 2.188      | 1.759                | 1.642                | 1.7500-18 UNS                  |

All dimensions for reference only.




# Solder Mounting Receptacle - Hermetic

Military (MS27471), Commercial (LJTI & LJTSI)

PART NUMBER BUILDER Page 31-32

**MILITARY**  
**MS27471Y**

**COMMERCIAL**  
**LJTIH, LJTIY**  
**LJTSIY**

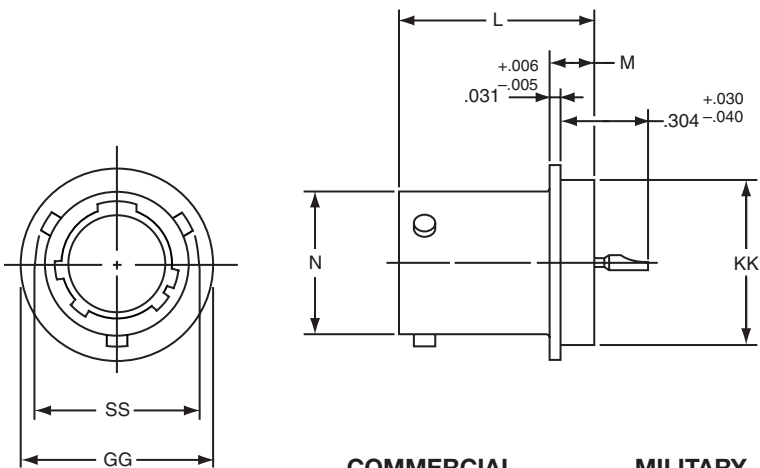

**COMMERCIAL**  
\* LJTIH-XX-XXX  
\*\* LJTIY-XX-XXX  
\*\*\* LJTSIY-XX-XXX

**MILITARY**  
MS27471YXXD  
MS27471YXXE

\* Long Junior Tri-Lock  
\*\* Interfacial seal wafer  
\*\*\* High temperature version, interfacial seal wafer with stainless steel shell

| Shell Size | N Dia.<br>+.001<br>-.005 | SS Dia.<br>+.000 -.016 | L +.011<br>-.000 | M<br>+.006<br>-.005 | GG Dia.<br>+.011<br>-.010 | KK Dia.<br>+.001<br>-.005 |
|------------|--------------------------|------------------------|------------------|---------------------|---------------------------|---------------------------|
| 9          | .572                     | .662                   | .789             | .125                | .750                      | .672                      |
| 11         | .700                     | .810                   | .789             | .125                | .844                      | .781                      |
| 13         | .850                     | .960                   | .789             | .125                | .969                      | .906                      |
| 15         | .975                     | 1.085                  | .789             | .125                | 1.094                     | 1.031                     |
| 17         | 1.100                    | 1.210                  | .789             | .125                | 1.218                     | 1.156                     |
| 19         | 1.207                    | 1.317                  | .789             | .125                | 1.312                     | 1.250                     |
| 21         | 1.332                    | 1.442                  | .789             | .125                | 1.438                     | 1.375                     |
| 23         | 1.457                    | 1.567                  | .821             | .156                | 1.563                     | 1.500                     |
| 25         | 1.582                    | 1.692                  | .821             | .156                | 1.688                     | 1.625                     |

All dimensions for reference only. Weld mounting hermetic receptacle also available. Consult Amphenol Aerospace for availability and dimensions.

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

# PCB Hermetic Wall Mounting Receptacle

Commercial (LJT00)

38999 III

38999 II

38999 I

SJT


Aquacon

2M

83723

26482

26500

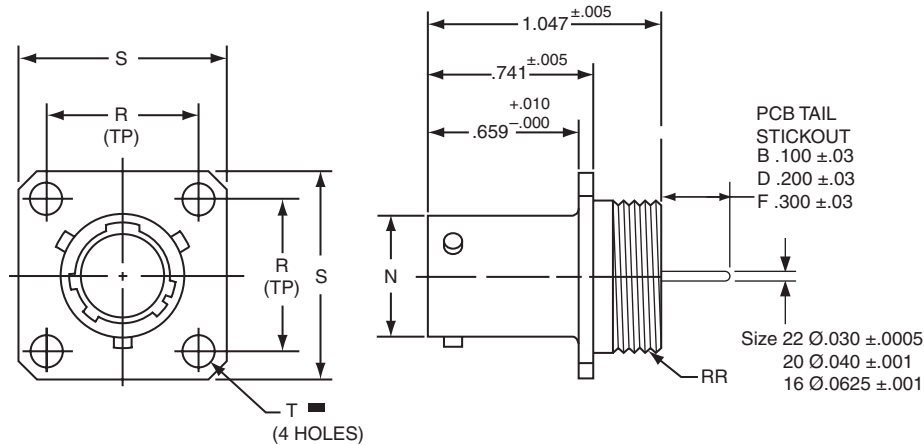

|                 | 1.          | 2.               | 3.           | 4.                                | 5.           | 6.          |
|-----------------|-------------|------------------|--------------|-----------------------------------|--------------|-------------|
| PART #          | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/Alt. Keying Position | Shell Finish | Tail Length |
| See chart below | 10-626      | 401              | -35          | P                                 | 1            | B           |

## HOW TO ORDER

| 1. BASE NUMBER                                                                |
|-------------------------------------------------------------------------------|
| <b>10-626</b> Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail |

| 2. CODED SHELL SIZE                                                                                  |
|------------------------------------------------------------------------------------------------------|
| See chart below <b>401-409</b> , designates size 9-25 shell size. Example: <b>401</b> = Size 9 Shell |

| 3. INSERT ARRANGEMENT                                                                            |
|--------------------------------------------------------------------------------------------------|
| <b>-35</b> Designates Insert Arrangement Number. Refer to insert availability chart on page 5-6. |

| 4. CONTACT TYPE/ALTERNATE KEYING                                                                             |
|--------------------------------------------------------------------------------------------------------------|
| <b>P</b> Designates Pin Contacts in Normal Position. Refer to page 31 for alternate rotation letters to use. |



| 5. SHELL FINISH                                           |
|-----------------------------------------------------------|
| <b>1</b> Hermetic seal, passivated Stainless Steel, 200°C |
| <b>2</b> Hermetic seal, Stainless Steel w/Nickel Plate    |
| <b>3</b> Carbon Steel w/reflowed tin plate                |

| 6. TAIL LENGTH    |
|-------------------|
| <b>B</b> .100±.03 |
| <b>D</b> .200±.03 |
| <b>F</b> .300±.03 |

All dimensions for reference only.

⊕ .005 DIA M

| Shell Size | Part Number            | N Dia.<br>+.001<br>-.005 | R<br>TP | S ±.016 | T Dia.<br>±.005 | RR Thread<br>Class 2A |
|------------|------------------------|--------------------------|---------|---------|-----------------|-----------------------|
| 9          | 10-626 <b>401</b> -XXX | .572                     | .719    | .938    | .128            | .6875-24 UNEF         |
| 11         | <b>402</b> -XXX        | .700                     | .812    | 1.031   | .128            | .8125-20 UNEF         |
| 13         | <b>403</b> -XXX        | .850                     | .906    | 1.125   | .128            | .9375-20 UNEF         |
| 15         | <b>404</b> -XXX        | .975                     | .969    | 1.219   | .128            | 1.0625-18 UNEF        |
| 17         | <b>405</b> -XXX        | 1.100                    | 1.062   | 1.312   | .128            | 1.1875-18 UNEF        |
| 19         | <b>406</b> -XXX        | 1.207                    | 1.156   | 1.438   | .128            | 1.3125-18 UNEF        |
| 21         | <b>407</b> -XXX        | 1.332                    | 1.250   | 1.562   | .128            | 1.4375-18 UNEF        |
| 23         | <b>408</b> -XXX        | 1.457                    | 1.375   | 1.688   | .147            | 1.5625-18 UNEF        |
| 25         | <b>409</b> -XXX        | 1.582                    | 1.500   | 1.812   | .147            | 1.6875-18 UNEF        |

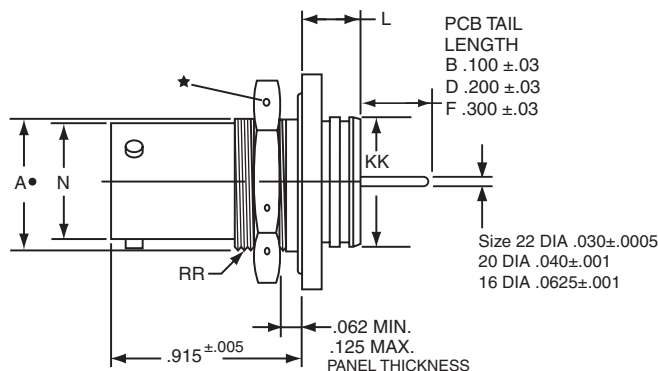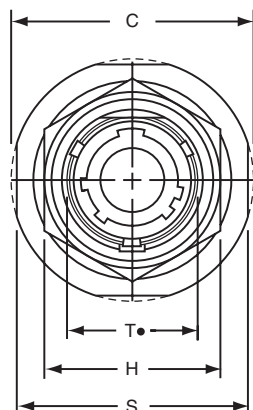

|                 | 1.                 | 2.                      | 3.                  | 4.                                       | 5.                  | 6.                 |
|-----------------|--------------------|-------------------------|---------------------|------------------------------------------|---------------------|--------------------|
| <b>PART #</b>   | <b>Base Number</b> | <b>Coded Shell Size</b> | <b>Insert Arrg.</b> | <b>Contact Type/Alt. Keying Position</b> | <b>Shell Finish</b> | <b>Tail Length</b> |
| See chart below | 10-626             | 411                     | -35                 | P                                        | 1                   | B                  |

## HOW TO ORDER

### 1. BASE NUMBER

**10-626** Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail

### 3. INSERT ARRANGEMENT

**-35** Designates Insert Arrangement Number. Refer to insert availability chart on page 5-6.

### 2. CODED SHELL SIZE

See chart below **411-419**, designates size 9-25 shell size. Example: **411** = Size 9 Shell

### 4. CONTACT TYPE/ALTERNATE KEYING

**P** Designates Pin Contacts in Normal Position. Refer to page 31 for alternate rotation letters to use.

### 5. SHELL FINISH

- 1** Hermetic seal, passivated Stainless Steel, 200°C
- 2** Hermetic seal, Stainless Steel w/Nickel Plate
- 3** Carbon Steel w/reflowed tin plate

### 6. TAIL LENGTH

- B** .100±.03
- D** .200±.03
- F** .300±.03


| Shell Size | Part Number            | A+<br>+.000<br>-.010 | C Max. | H Hex<br>+.017<br>-.016 | L<br>Max. | N +.000<br>-.005 | S<br>±.016 | T+<br>+.010<br>-.000 | KK<br>+.011<br>-.000 | RR Thread<br>Class 2A (Plated) |
|------------|------------------------|----------------------|--------|-------------------------|-----------|------------------|------------|----------------------|----------------------|--------------------------------|
| 9          | 10-626 <b>411</b> -XXX | .669                 | 1.199  | .875                    | .297      | .572             | 1.062      | .697                 | .642                 | .6875-24 UNEF                  |
| 11         | <b>412</b> -XXX        | .769                 | 1.386  | 1.000                   | .297      | .700             | 1.250      | .822                 | .766                 | .8125-20 UNEF                  |
| 13         | <b>413</b> -XXX        | .955                 | 1.511  | 1.188                   | .297      | .850             | 1.375      | 1.007                | .892                 | 1.0000-20 UNEF                 |
| 15         | <b>414</b> -XXX        | 1.084                | 1.636  | 1.312                   | .297      | .975             | 1.500      | 1.134                | 1.018                | 1.1250-18 UNEF                 |
| 17         | <b>415</b> -XXX        | 1.208                | 1.761  | 1.438                   | .297      | 1.100            | 1.625      | 1.259                | 1.142                | 1.2500-18 UNEF                 |
| 19         | <b>416</b> -XXX        | 1.333                | 1.949  | 1.562                   | .328      | 1.207            | 1.812      | 1.384                | 1.268                | 1.3750-18 UNEF                 |
| 21         | <b>417</b> -XXX        | 1.459                | 2.073  | 1.688                   | .328      | 1.332            | 1.938      | 1.507                | 1.392                | 1.5000-18 UNEF                 |
| 23         | <b>418</b> -XXX        | 1.580                | 2.199  | 1.812                   | .328      | 1.457            | 2.062      | 1.634                | 1.518                | 1.6250-18 UNEF                 |
| 25         | <b>419</b> -XXX        | 1.709                | 2.328  | 2.000                   | .328      | 1.582            | 2.188      | 1.759                | 1.642                | 1.7500-18 UNS                  |

All dimensions for reference only. Weld mounting hermetic receptacle also available. Consult Amphenol for availability and dimensions.

All dimensions for reference only.

# PCB Hermetic Solder Mounting Receptacle

Commercial (LJT)

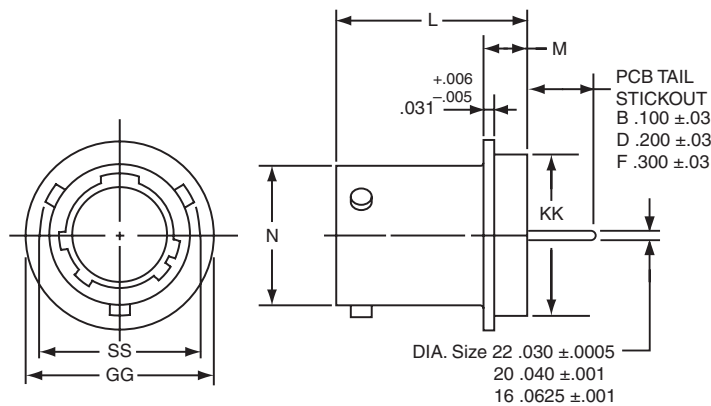

|                 | 1.          | 2.               | 3.           | 4.                                    | 5.           | 6.          |
|-----------------|-------------|------------------|--------------|---------------------------------------|--------------|-------------|
| PART #          | Base Number | Coded Shell Size | Insert Arrg. | Contact Type/<br>Alt. Keying Position | Shell Finish | Tail Length |
| See chart below | 10-626      | 421              | -35          | P                                     | 1            | B           |

## HOW TO ORDER

| 1. BASE NUMBER                                                                |
|-------------------------------------------------------------------------------|
| <b>10-626</b> Base Number for MIL-DTL-38999 Series III Hermetic with PCB Tail |

| 2. CODED SHELL SIZE                                                                                  |
|------------------------------------------------------------------------------------------------------|
| See chart below <b>421-429</b> , designates size 9-25 shell size. Example: <b>421</b> = Size 9 Shell |

| 3. INSERT ARRANGEMENT                                                                            |
|--------------------------------------------------------------------------------------------------|
| <b>-35</b> Designates Insert Arrangement Number. Refer to insert availability chart on page 5-6. |

| 4. CONTACT TYPE/ALTERNATE KEYING                                                                             |
|--------------------------------------------------------------------------------------------------------------|
| <b>P</b> Designates Pin Contacts in Normal Position. Refer to page 31 for alternate rotation letters to use. |

| 5. SHELL FINISH                                           |
|-----------------------------------------------------------|
| <b>1</b> Hermetic seal, passivated Stainless Steel, 200°C |
| <b>2</b> Hermetic seal, Stainless Steel w/Nickel Plate    |
| <b>3</b> Carbon Steel w/reflowed tin plate                |

| 6. TAIL LENGTH    |
|-------------------|
| <b>B</b> .100±.03 |
| <b>D</b> .200±.03 |
| <b>F</b> .300±.03 |

| Shell Size | Part Number            | N Dia.<br>+.001<br>-.005 | SS Dia.<br>+.000<br>-.016 | L +.011<br>-.000 | M<br>+.006<br>-.005 | GG Dia.<br>+.011<br>-.010 | KK Dia.<br>+.001<br>-.005 |
|------------|------------------------|--------------------------|---------------------------|------------------|---------------------|---------------------------|---------------------------|
| 9          | 10-626 <b>421</b> -XXX | .572                     | .662                      | .789             | .125                | .750                      | .672                      |
| 11         | <b>422</b> -XXX        | .700                     | .810                      | .789             | .125                | .844                      | .781                      |
| 13         | <b>423</b> -XXX        | .850                     | .960                      | .789             | .125                | .969                      | .906                      |
| 15         | <b>424</b> -XXX        | .975                     | 1.085                     | .789             | .125                | 1.094                     | 1.031                     |
| 17         | <b>425</b> -XXX        | 1.100                    | 1.210                     | .789             | .125                | 1.218                     | 1.156                     |
| 19         | <b>426</b> -XXX        | 1.207                    | 1.317                     | .789             | .125                | 1.312                     | 1.250                     |
| 21         | <b>427</b> -XXX        | 1.332                    | 1.442                     | .789             | .125                | 1.438                     | 1.375                     |
| 23         | <b>428</b> -XXX        | 1.457                    | 1.567                     | .821             | .156                | 1.563                     | 1.500                     |
| 25         | <b>429</b> -XXX        | 1.582                    | 1.692                     | .821             | .156                | 1.688                     | 1.625                     |

All dimensions for reference only.  
Weld mounting hermetic receptacle also available.  
Consult Amphenol for availability and dimensions.

# SJT

Amphenol® SJT connectors combine unique design features of the scoop-proof LJT series within standard mounting dimensions of JT types. Available in a wide range of shell sizes, finishes, insert arrangements and accessories.

## COMPONENTS:

Serrated and threaded shells, with a moisture sealing pilot for back shells, accept a wide range of accessories. Hermetic seal receptacles are available in carbon steel or stainless steel shells.



## FEATURES:

- **100% scoop-proof design**  
Basic MIL-DTL-38999  
Series I\* lengths
- **Standard mounting dimensions**  
MIL-DTL-38999,  
Series II\*\* dimensions
- **Compliance with European Specifications**  
PAN6433-2, LN29729,  
VG96912

## CONTACT RATING

| Contact Size | Test Current |          | Maximum Millivolt Drop Crimp* | Maximum Millivolt Drop Hermetic |
|--------------|--------------|----------|-------------------------------|---------------------------------|
|              | Standard     | Hermetic |                               |                                 |
| 22M          | 3            | 2        | 45                            | 60                              |
| 22D          | 5            | 3        | 73                            | 85                              |
| 22           | 5            | 3        | 73                            | 85                              |
| 20           | 7.5          | 5        | 55                            | 60                              |
| 16           | 13           | 10       | 49                            | 85                              |
| 12           | 23           | 17       | 42                            | 85                              |

\* When using silver plated wire

## SERVICE RATING\*\*

| Service Rating | Suggested Operating Voltage (Sea Level) |      | Test Voltage (Sea Level) | Test Voltage 50,000 Ft. | Test Voltage 70,000 Ft. | Test Voltage 110,000 Ft. |
|----------------|-----------------------------------------|------|--------------------------|-------------------------|-------------------------|--------------------------|
|                | AC (RMS)                                | DC   |                          |                         |                         |                          |
| M              | 400                                     | 550  | 1300 VRMS                | 550 VRMS                | 350 VRMS                | 200 VRMS                 |
| N              | 300                                     | 450  | 1000 VRMS                | 400 VRMS                | 260 VRMS                | 200 VRMS                 |
| I              | 600                                     | 850  | 1800 VRMS                | 600 VRMS                | 400 VRMS                | 200 VRMS                 |
| II             | 900                                     | 1250 | 2300 VRMS                | 800 VRMS                | 500 VRMS                | 200 VRMS                 |

\*\* Please note that the establishment of electrical safety factors is left entirely in the designer's hands, since he is in the best possible position to know what peak voltage, switching surges, transients, etc., can be expected in a particular circuit.

## How to Order, Alternate Rotations

| 1.                                             | 2.                             | 3.           | 4.                        | 5.                       |
|------------------------------------------------|--------------------------------|--------------|---------------------------|--------------------------|
| Connector Type SJT, Shell Style, Service Class | Shell Size-Insert Arrangement. | Contact Type | Alternate Keying Position | Finish Variations Suffix |
| <b>SJT07Y</b>                                  | <b>12-98</b>                   | <b>P</b>     | <b>A</b>                  | <b>(XXX)</b>             |

## 1. CONNECTOR TYPE AND STYLE

|               |                            |
|---------------|----------------------------|
| <b>SJT07Y</b> | Jam Nut Receptacle         |
| <b>SJTIY</b>  | Solder Mounting Receptacle |

Fused compression glass sealed inserts. Leakage rate less than 1.0x10<sup>-6</sup> cc/sec at 15 psi differential; with interfacial seal.

## 2. SHELL SIZE &amp; INSERT ARRANGEMENT SEE CHART BELOW

First number represents Shell Size,  
second number is the Insert Arrangement.


| Shell Size | Crimp | Hermetics* Class Y | Service Rating | Total Contacts | Contact Size |     |    |    |    |    |           |            |          |               |
|------------|-------|--------------------|----------------|----------------|--------------|-----|----|----|----|----|-----------|------------|----------|---------------|
|            |       |                    |                |                | 22D          | 22M | 22 | 20 | 16 | 12 | 12 (Coax) | 10 (Power) | 8 (Coax) | 8+++ (Twinax) |
| 12-98      | X     | X                  | I              | 10             |              |     |    | 10 |    |    |           |            |          |               |
| 14-19      | X     | X                  | I              | 19             |              |     |    | 19 |    |    |           |            |          |               |
| 14-35      | X     | X                  | M              | 37             | 37           |     |    |    |    |    |           |            |          |               |
| 14-37      | X     | X                  | M              | 37             |              | 37  |    |    |    |    |           |            |          |               |
| 16-99      | X     | X                  | I              | 23             |              |     |    | 21 | 2  |    |           |            |          |               |
| 18-35      | X     | X                  | M              | 66             | 66           |     |    |    |    |    |           |            |          |               |
| 18-66      | X     | X                  | M              | 66             |              | 66  |    |    |    |    |           |            |          |               |
| 20-1       | X     | X                  | M              | 79             |              | 79  |    |    |    |    |           |            |          |               |
| 20-35      | X     | X                  | M              | 79             | 79           |     |    |    |    |    |           |            |          |               |
| 22-1       | X     | X                  | M              | 100            |              | 100 |    |    |    |    |           |            |          |               |
| 22-35      | X     | X                  | M              | 100            | 100          |     |    |    |    |    |           |            |          |               |

## 3. CONTACT TYPE

|          |                       |
|----------|-----------------------|
| <b>P</b> | Pin Contacts - Solder |
|----------|-----------------------|

## 5. FINISH VARIATION SUFFIX

| Finish                                            | Suffix           | Indicated Finish Standard for SJT Types |
|---------------------------------------------------|------------------|-----------------------------------------|
| Hermetic Connectors                               |                  |                                         |
| Carbon Steel Shell, Tin Plated Shell and Contacts |                  | SJT( )Y                                 |
| Stainless Steel Shell, Gold Plated Contacts       | Consult Amphenol |                                         |



**RELATIVE POSSIBLE POSITION OF ROTATED MASTER KEYWAY (front face of receptacle shown)**

## 4. ALTERNATE KEYING POSITION

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The AB angle for a given connector is the same whether it contains pins or sockets. Inserts are not rotated in conjunction with the master key/keyway. AB angles shown are viewed from the front face of the connector. A receptacle is shown below. The angles for the plug are exactly the same, except the direction of rotation is opposite of that shown for the receptacle.

KEY/KEYWAY ROTATION  
AB ANGLE OF ROTATION (DEGREES)

| Shell Size | Normal | A  | B  | C   | D   |
|------------|--------|----|----|-----|-----|
| 8          | 95     |    |    |     |     |
| 10         | 95     | 81 | 67 | 123 | 109 |
| 12         | 95     | 75 | 63 | 127 | 115 |
| 14         | 95     | 74 | 61 | 129 | 116 |
| 16         | 95     | 77 | 65 | 125 | 113 |
| 18         | 95     | 77 | 65 | 125 | 113 |
| 20         | 95     | 77 | 65 | 125 | 113 |
| 22         | 95     | 80 | 69 | 121 | 110 |
| 24         | 95     | 80 | 69 | 121 | 110 |



# SJTIY – Hermetic

## Solder Mounting Receptacle

PART NUMBER BUILDER Page 40

COMMERCIAL

SJTIY



| Shell Size | L<br>+.011<br>-.000 | M<br>+.006<br>-.005 | G Dia.<br>+.011<br>-.010 | K Dia.<br>+.001<br>-.005 | N<br>+.001<br>-.005 |
|------------|---------------------|---------------------|--------------------------|--------------------------|---------------------|
| 8          | .789                | .125                | .687                     | .562                     | .473                |
| 10         | .789                | .125                | .797                     | .672                     | .590                |
| 12         | .789                | .125                | .906                     | .781                     | .750                |
| 14         | .789                | .125                | 1.031                    | .906                     | .875                |
| 16         | .789                | .125                | 1.156                    | 1.031                    | 1.000               |
| 18         | .789                | .125                | 1.281                    | 1.156                    | 1.125               |
| 20         | .789                | .125                | 1.375                    | 1.250                    | 1.250               |
| 22         | .821                | .156                | 1.500                    | 1.375                    | 1.375               |
| 24         | .821                | .156                | 1.625                    | 1.500                    | 1.500               |



# SJT07Y – Hermetic

## Jam Nut Receptacle

PART NUMBER BUILDER Page 40

COMMERCIAL

SJT07Y

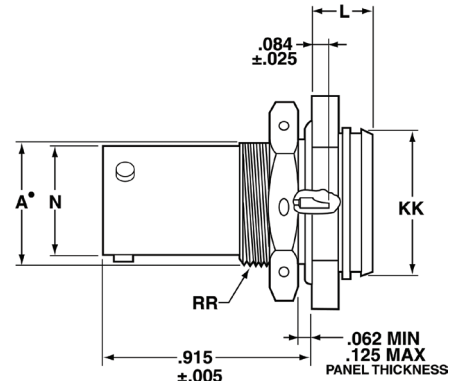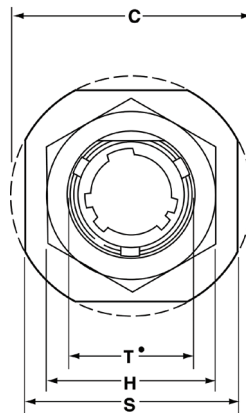

• “D” shaped panel cut-out dimensions

| Shell Size | N<br>+.001<br>-.005 | C<br>Max. | A*<br>+.000<br>-.010 | L<br>Max. | H Hex<br>+.017<br>-.016 | S<br>±.016 | KK<br>+.011<br>-.000 | RR<br>Thread<br>Class 2A<br>UNEF (Plated) | T*<br>+.010<br>-.000 |
|------------|---------------------|-----------|----------------------|-----------|-------------------------|------------|----------------------|-------------------------------------------|----------------------|
| 8          | .473                | 1.078     | .542                 | .297      | .750                    | .938       | .642                 | .5625-24                                  | .572                 |
| 10         | .590                | 1.203     | .669                 | .297      | .875                    | 1.062      | .766                 | .6875-24                                  | .697                 |
| 12         | .750                | 1.391     | .830                 | .297      | 1.062                   | 1.250      | .892                 | .8750-20                                  | .884                 |
| 14         | .875                | 1.515     | .955                 | .297      | 1.188                   | 1.375      | 1.018                | 1.0000-20                                 | 1.007                |
| 16         | 1.000               | 1.641     | 1.084                | .297      | 1.312                   | 1.500      | 1.142                | 1.1250-18                                 | 1.134                |
| 18         | 1.125               | 1.766     | 1.208                | .328      | 1.438                   | 1.625      | 1.268                | 1.2500-18                                 | 1.259                |
| 20         | 1.250               | 1.953     | 1.333                | .328      | 1.562                   | 1.812      | 1.392                | 1.3750-18                                 | 1.384                |
| 22         | 1.375               | 2.078     | 1.459                | .328      | 1.688                   | 1.938      | 1.518                | 1.5000-18                                 | 1.507                |
| 24         | 1.500               | 2.203     | 1.580                | .328      | 1.812                   | 2.062      | 1.642                | 1.6250-18                                 | 1.634                |

All dimensions for reference only.

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500



**HERMETIC  
JAM NUT  
RECEPTACLE  
AJ7H/AS7H**



**HERMETIC  
SQUARE FLANGE  
RECEPTACLE  
AJ0H**

# AQUACON

## FEATURES:


- 1500 PSI Capability
- “O” Ring Sealing, Thread
- Threaded Coupling
- Visual Mating Indication
- Design Flexibility

The Amphenol® Aquacon Series of connectors has been designed to provide maximum service in oceanic or fluid immersion applications.

Specially designed type 316 stainless steel shells resist corrosion and provide a pressure withstanding connector. Positive threaded coupling. “O” rings, and a color band visual indicator assure sealing and proper mating.

Aquacon Connectors are available in two receptacle styles, with numerous MIL-DTL-38999 insert patterns.

## DESIGN FEATURES OF AQUACON SERIES CONNECTORS

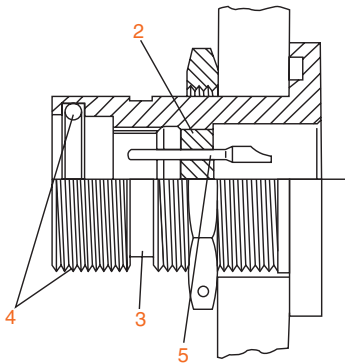

2. Hermetic inserts in MIL-DTL-38999 patterns.
3. Visual mating indicator
4. 1500 PSI sealing capability assured by threaded coupling and “O” ring
5. Pin contacts in receptacle



### AQUACON CONTACT RATINGS

| Contact Size | Test Current |          | Maximum Millivolt Drop |        |                 | Crimp Well Data |       | Solder Well Data |                  |      |
|--------------|--------------|----------|------------------------|--------|-----------------|-----------------|-------|------------------|------------------|------|
|              | Standard     | Hermetic | Crimp                  | Solder | Solder Hermetic | Diameter        | Depth | Diameter         | Depth            |      |
| 22M          | 3            | 2        | 30                     | 20     | 60              | .029 ±.001      | .141  | .029             | + .004<br>- .000 | .094 |
| 22D          | 5            | —        | 40                     | —      | —               | .0345 ±.001     | .141  | —                |                  | —    |
| 22           | 5            | 3        | 40                     | 20     | 85              | .0365 ±.001     | .141  | .036             | + .004<br>- .000 | .094 |
| 20           | 7.5          | 5        | 35                     | 20     | 60              | .047 ±.001      | .209  | .044             | + .004<br>- .000 | .125 |
| 16           | 13           | 10       | 25                     | 20     | 85              | .067 ±.001      | .209  | .078             | + .004<br>- .002 | .141 |
| 12           | 23           | 17       | 25                     | 20     | 85              | .100 ±.002      | .209  | .116 ±.004       |                  | .151 |

### AQUACON SERVICE RATINGS

| Service Rating | Suggested Operating Voltage (Sea Level) |      |
|----------------|-----------------------------------------|------|
|                | AC (RMS)                                | DC   |
| M              | 400                                     | 550  |
| I              | 600                                     | 850  |
| II             | 900                                     | 1250 |



The establishment of electrical safety factors is left entirely in the designer's hands, as he can best determine what peak voltage, switching surges, transients, etc. can be expected in a particular circuit.

### ALTERNATE POSITIONING


Alternate positioning of connectors allows connectors with identical insert arrangements to be mounted side by side by providing a positive means of eliminating inadvertent cross-mating or cross-plugging.

Alternate positioning of Aquacon Series is achieved by a rotation of the master key/keyway, relative to the insert, as part of the shell manufacturing operation.

Recommended practice is to use alternate position inserts only when necessary.

### AQUACON MASTER KEY/KEYWAY ROTATION

| Shell Size | AB Angle of Rotation (Degrees) |    |    |     |     |
|------------|--------------------------------|----|----|-----|-----|
|            | Normal                         | A  | B  | C   | D   |
| 8          | 100                            | 82 |    |     | 118 |
| 10         | 100                            | 86 | 72 | 128 | 114 |
| 12         | 100                            | 80 | 68 | 132 | 120 |
| 14         | 100                            | 79 | 66 | 134 | 121 |
| 16         | 100                            | 82 | 70 | 130 | 118 |
| 18         | 100                            | 82 | 70 | 130 | 118 |
| 20         | 100                            | 82 | 70 | 130 | 118 |
| 22         | 100                            | 85 | 74 | 126 | 115 |
| 24         | 100                            | 85 | 74 | 126 | 115 |

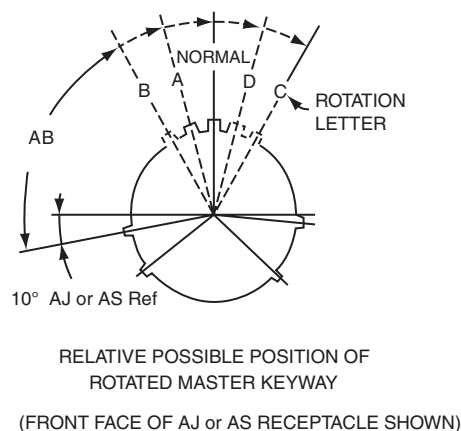

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

# Aquacon Series

## Insert Availability

|           | Aquacon Shell Size | Hermetic* | Service Rating** | Total Contacts | Contact Size |     |    |    |    |    |
|-----------|--------------------|-----------|------------------|----------------|--------------|-----|----|----|----|----|
|           |                    |           |                  |                | 22D          | 22M | 22 | 20 | 16 | 12 |
| 38999 III | 8-3                | X         | M                | 3              |              |     |    | 3  |    |    |
|           | 8-6                | X         | M                | 6              |              | 6   |    |    |    |    |
| 38999 II  | 8-35               | X         | M                | 6              | 6            |     |    |    |    |    |
|           | 8-98               | X         | I                | 3              |              |     |    | 3  |    |    |
| 38999 I   | 10-5               | X         | I                | 5              |              |     |    | 5  |    |    |
|           | 10-13              | X         | M                | 13             |              | 13  |    |    |    |    |
| SJT       | 10-35              | X         | M                | 13             | 13           |     |    |    |    |    |
|           | 10-98              | X         | I                | 6              |              |     |    | 6  |    |    |
| Aquacon   | 12-3               | X         | II               | 3              |              |     |    |    | 3  |    |
|           | 12-8               | X         | I                | 8              |              |     |    | 8  |    |    |
| 2M        | 12-35              | X         | M                | 22             | 22           |     |    |    |    |    |
|           | 12-98              | X         | I                | 10             |              |     |    | 10 |    |    |
| 83723     | 14-5               | X         | II               | 5              |              |     |    |    | 5  |    |
|           | 14-18              | X         | I                | 18             |              |     |    | 18 |    |    |
| 26482     | 14-35              | X         | M                | 37             | 37           |     |    |    |    |    |
|           | 14-37              | X         | M                | 37             |              | 37  |    |    |    |    |
| 26500     | 16-6†              | X         | I                | 6              |              |     |    |    |    | 6  |
|           | 16-8               | X         | II               | 8              |              |     |    |    | 8  |    |
|           | 16-26              | X         | I                | 26             |              |     |    | 26 |    |    |
|           | 16-35              | X         | M                | 55             | 55           |     |    |    |    |    |
|           | 16-55              | X         | M                | 55             |              | 55  |    |    |    |    |
|           | 18-32              | X         | I                | 32             |              |     |    | 32 |    |    |
|           | 18-35              | X         | M                | 66             | 66           |     |    |    |    |    |
|           | 18-66              | X         | M                | 66             |              | 66  |    |    |    |    |
|           | 20-16              | X         | II               | 16             |              |     |    |    | 16 |    |
|           | 20-41              | X         | I                | 41             |              |     |    | 41 |    |    |
|           | 22-21              | X         | II               | 21             |              |     |    |    | 21 |    |
|           | 22-55              | X         | I                | 55             |              |     |    | 55 |    |    |
|           | 24-19†             | X         | I                | 19             |              |     |    |    |    | 19 |

\* Tooled for pin inserts only (contact Amphenol for socket availability).

\*\* See specifications

† AS Aquacon version - these arrangements use SJT (38999 type) patterns that incorporate size 12 contacts.





See how to order page 47.

Additional insert arrangements may be made available upon request.

Front face of pin inserts illustrated

|                    |  |  |  |  |  |  |  |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Insert Arrangement | 8-3                                                                               | 8-6                                                                               | 8-35                                                                              | 8-98                                                                              | 10-5                                                                               | 10-13                                                                               | 10-35                                                                               |
| Service Rating     | M                                                                                 | M                                                                                 | M                                                                                 | I                                                                                 | I                                                                                  | M                                                                                   | M                                                                                   |
| Number of Contacts | 3                                                                                 | 6                                                                                 | 6                                                                                 | 3                                                                                 | 5                                                                                  | 13                                                                                  | 13                                                                                  |
| Contact Size       | 20                                                                                | 22M                                                                               | 22D                                                                               | 20                                                                                | 20                                                                                 | 22M                                                                                 | 22D                                                                                 |

|                    |  |  |  |  |  |  |  |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Insert Arrangement | 10-98                                                                             | 12-3                                                                              | 12-8                                                                              | 12-35                                                                             | 12-98                                                                             | 14-5                                                                                | 14-18                                                                               |
| Service Rating     | I                                                                                 | II                                                                                | I                                                                                 | M                                                                                 | I                                                                                 | II                                                                                  | I                                                                                   |
| Number of Contacts | 6                                                                                 | 3                                                                                 | 8                                                                                 | 22                                                                                | 10                                                                                | 5                                                                                   | 18                                                                                  |
| Contact Size       | 20                                                                                | 16                                                                                | 20                                                                                | 22D                                                                               | 20                                                                                | 16                                                                                  | 20                                                                                  |

|                    |  |  |  |  |  |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Insert Arrangement | 14-35                                                                               | 14-37                                                                               | 16-6†                                                                               | 16-8                                                                                 | 16-26                                                                                 |
| Service Rating     | M                                                                                   | M                                                                                   | I                                                                                   | II                                                                                   | I                                                                                     |
| Number of Contacts | 37                                                                                  | 37                                                                                  | 6                                                                                   | 8                                                                                    | 26                                                                                    |
| Contact Size       | 22D                                                                                 | 22M                                                                                 | 12                                                                                  | 16                                                                                   | 20                                                                                    |

See page 43 for service ratings and contact sizes.

† AS Aquacon version - uses an SJT (38999 type) pattern with size 12 contacts.

See how to order page 47.



38999 III

38999 II

38999 I

SJT

Aquacon


2M

83723


26482

26500


Front face of pin inserts illustrated

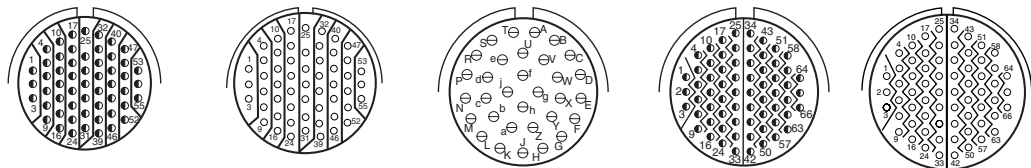

| Insert Arrangement | 16-35 | 16-55 | 18-32 | 18-35 | 18-66 |
|--------------------|-------|-------|-------|-------|-------|
| Service Rating     | M     | M     | I     | M     | M     |
| Number of Contacts | 55    | 55    | 32    | 66    | 66    |
| Contact Size       | 22D   | 22M   | 20    | 22D   | 22M   |

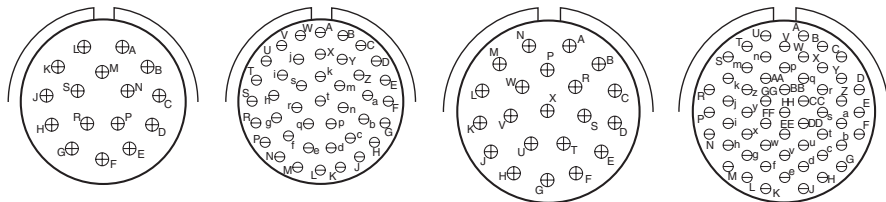

| Insert Arrangement | 20-16 | 20-41 | 22-21 | 22-55 |
|--------------------|-------|-------|-------|-------|
| Service Rating     | II    | I     | II    | I     |
| Number of Contacts | 16    | 41    | 21    | 55    |
| Contact Size       | 16    | 20    | 16    | 20    |



| Insert Arrangement | 24-19† |
|--------------------|--------|
| Service Rating     | I      |
| Number of Contacts | 19     |
| Contact Size       | 12     |

See page 43 for service ratings and contact sizes.  
† AS Aquacon version - uses an SJT (38999 type) pattern with size 12 contacts. See how to order page 47.

CONTACT LEGEND

8

12

16

20

22

22M

22D

| 1.<br>Connector & Shell Style | 2.<br>Contact Type | 3.<br>Shell Size – Insert Arrangement | 4.<br>Contact Configuration | 5.<br>Insert Rotation |
|-------------------------------|--------------------|---------------------------------------|-----------------------------|-----------------------|
| <b>AJ7</b>                    | <b>H</b>           | <b>20-41</b>                          | <b>P</b>                    | <b>A</b>              |

### AQUACON IMMERSIBLE CONNECTORS

Aquacon with JT (38999 Type) Inserts

Aquacon with SJT (38999 Type) inserts- size 12 contacts only

Fused compression glass sealed inserts. Leakage rate less than 1.0x10<sup>-6</sup> cc/sec at 15 psi differential; with interfacial seal.

|                 |                    |            |            |
|-----------------|--------------------|------------|------------|
| <b>Hermetic</b> | Jam Nut Receptacle | <b>AJ7</b> | <b>AS7</b> |
|                 | Square Flange      | <b>AJ0</b> |            |

### 2. CONTACT TYPE

| Receptacle |                                                             |
|------------|-------------------------------------------------------------|
| <b>H</b>   | Hermetic (Glass Seal) Solder Termination (Receptacles only) |

### 3. INSERT ARRANGEMENT

Shell Size & Insert Arrangements are on pages 44. First number represents Shell Size, second number is the Insert Arrangement.

### 4. CONTACTS

|          |                       |
|----------|-----------------------|
| <b>P</b> | Pin Contacts - Solder |
|----------|-----------------------|

### 5. ALTERNATE KEYING POSITION


Alternate positioning of Aquacon Series is achieved by a rotation of the master key/keyway, relative to the insert, as part of the shell manufacturing operation.

Recommended practice is to use alternate position inserts only when necessary.

### AQUACON MASTER KEY/KEYWAY ROTATION

| Shell Size | AB Angle of Rotation (Degrees) |    |    |     |     |
|------------|--------------------------------|----|----|-----|-----|
|            | Normal                         | A  | B  | C   | D   |
| 8          | 100                            | 82 |    |     | 118 |
| 10         | 100                            | 86 | 72 | 128 | 114 |
| 12         | 100                            | 80 | 68 | 132 | 120 |
| 14         | 100                            | 79 | 66 | 134 | 121 |
| 16         | 100                            | 82 | 70 | 130 | 118 |
| 18         | 100                            | 82 | 70 | 130 | 118 |
| 20         | 100                            | 82 | 70 | 130 | 118 |
| 22         | 100                            | 85 | 74 | 126 | 115 |
| 24         | 100                            | 85 | 74 | 126 | 115 |

Hermetics are available only in pin contacts.

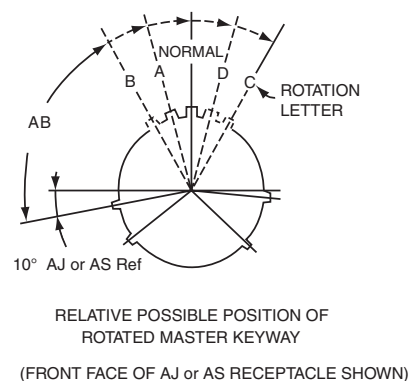

Consult Amphenol Aerospace for other options and special variations available.


# AJ7H / AS7H Aquacon

Hermetic Jam Nut Receptacle


PART NUMBER BUILDER Page 47

AJ7H-  
AS7H-

AJ7H-XX-XXX(XXX)

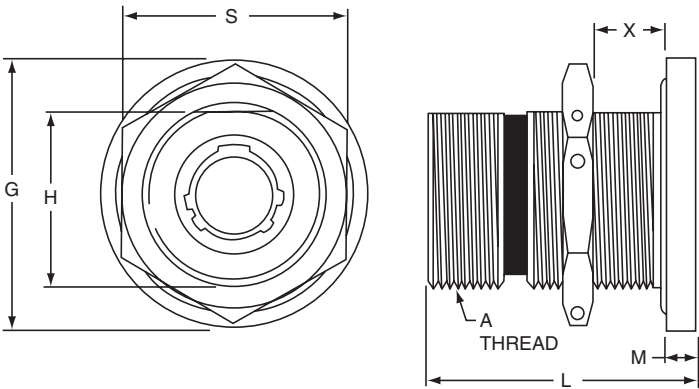

AS7H-XX-XXX(XXX)

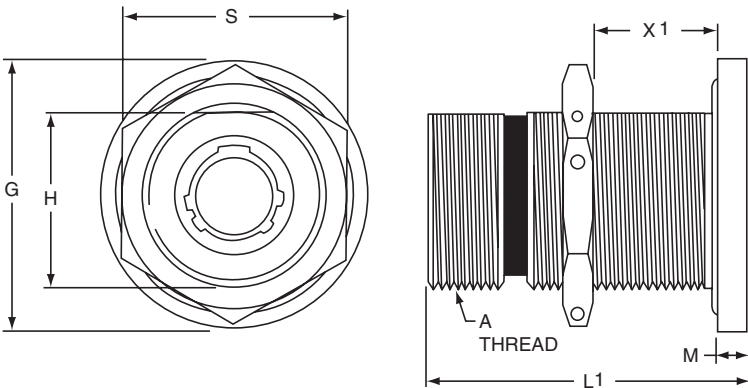

AJ Aquacon use JT (38999 type) inserts that incorporate contact sizes 22D, 22M, 22, 20 or 16. AS Aquacon use SJT (38999 type) inserts that incorporate size 12 contacts

| Shell Size | A Thread Class 2A | G Dia. | H<br>+.000<br>-.000 | L<br>±.010<br>(Hermetic AJ) | L1<br>+.000<br>-.010<br>(Hermetic AS) | M    | S Hex<br>±.016 | X Bulkhead Thickness<br>(AJ) | X1 Bulkhead Thickness<br>(AS) |
|------------|-------------------|--------|---------------------|-----------------------------|---------------------------------------|------|----------------|------------------------------|-------------------------------|
|            |                   |        |                     |                             |                                       |      |                |                              |                               |
| 8          | .750-20 UNEF      | 1.125  | .700                | 1.125                       | 1.500                                 | .125 | .938           | .03 – .31                    | .06 – .72                     |
| 10         | .875-20 UNEF      | 1.250  | .825                | 1.125                       | 1.500                                 | .125 | 1.062          | .03 – .31                    | .06 – .72                     |
| 12         | 1.000-20 UNEF     | 1.406  | .950                | 1.125                       | 1.500                                 | .125 | 1.188          | .03 – .31                    | .06 – .72                     |
| 14         | 1.125-18 UNEF     | 1.531  | 1.075               | 1.125                       | 1.500                                 | .125 | 1.312          | .03 – .31                    | .06 – .72                     |
| 16         | 1.250-18 UNEF     | 1.654  | 1.200               | 1.125                       | 1.500                                 | .125 | 1.438          | .03 – .31                    | .06 – .72                     |
| 18         | 1.375-18 UNEF     | 1.844  | 1.325               | 1.125                       | 1.500                                 | .125 | 1.562          | .03 – .31                    | .06 – .72                     |
| 20         | 1.500-18 UNEF     | 2.000  | 1.450               | 1.250                       | 1.500                                 | .188 | 1.688          | .03 – .38                    | .06 – .65                     |
| 22         | 1.625-18 UNEF     | 2.125  | 1.575               | 1.250                       | 1.500                                 | .188 | 1.812          | .03 – .38                    | .06 – .65                     |
| 24         | 1.750-18 UNS      | 2.250  | 1.700               | 1.250                       | 1.500                                 | .188 | 2.000          | .03 – .38                    | .06 – .65                     |


All dimensions for reference only.

# AJOH Aquacon

## Hermetic Square Flange Receptacle

PART NUMBER BUILDER Page 47

AJOH-

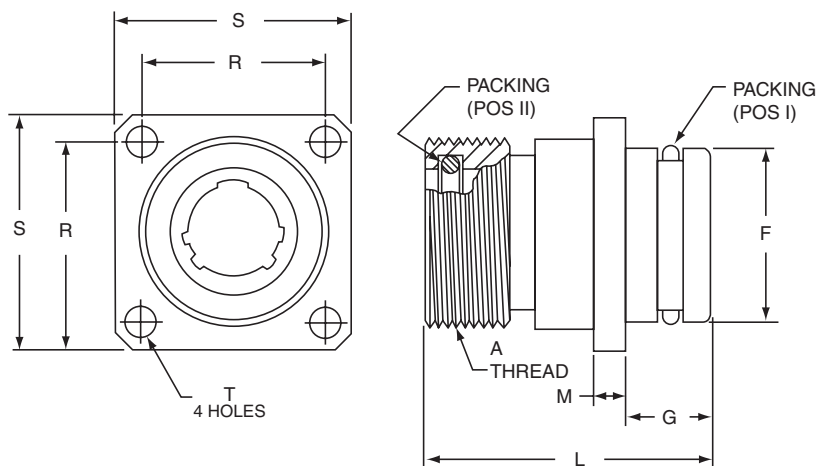

AJOH-XX-XXX(XXX)

The Aquacon Hermetic Square Flange Receptacle is available in AJ style only which incorporates contact sizes 22D, 22M, 22, 20 or 16.

| Shell Size | A Thread Class 2A | F Dia. $\begin{smallmatrix} +.000 \\ -.001 \end{smallmatrix}$ | G $\pm .030$ | L     | M    | R     | S     | T $\pm .005$ | Packing Pos I Part Number | Packing Pos II Part Number |
|------------|-------------------|---------------------------------------------------------------|--------------|-------|------|-------|-------|--------------|---------------------------|----------------------------|
| 8          | .750-20 UNEF      | .685                                                          | .344         | 1.125 | .125 | .719  | .938  | .128         | 10-90351-15               | 10-90351-14                |
| 10         | .875-20 UNEF      | .810                                                          | .344         | 1.125 | .125 | .812  | 1.031 | .128         | 10-90351-17               | 10-90351-16                |
| 12         | 1.000-20 UNEF     | .935                                                          | .344         | 1.125 | .125 | .906  | 1.125 | .128         | 10-90351-19               | 10-90351-18                |
| 14         | 1.125-18 UNEF     | 1.060                                                         | .344         | 1.125 | .125 | .969  | 1.219 | .128         | 10-90351-21               | 10-90351-20                |
| 16         | 1.250-18 UNEF     | 1.185                                                         | .344         | 1.125 | .125 | 1.062 | 1.312 | .128         | 10-90351-23               | 10-90351-22                |
| 18         | 1.375-18 UNEF     | 1.248                                                         | .344         | 1.125 | .125 | 1.156 | 1.438 | .128         | 10-90351-24               | 10-90351-24                |
| 20         | 1.500-18 UNEF     | 1.373                                                         | .375         | 1.219 | .188 | 1.250 | 1.562 | .128         | 10-90351-26               | 10-90351-26                |
| 22         | 1.625-18 UNEF     | 1.498                                                         | .375         | 1.219 | .188 | 1.375 | 1.688 | .147         | 10-90351-28               | 10-90351-28                |
| 24         | 1.750-18 UNS      | 1.623                                                         | .375         | 1.219 | .188 | 1.500 | 1.812 | .147         | 10-90351-29               | 10-90351-29                |

All dimensions for reference only.

# Aquacon Series

## Installation Instructions, Application Tools

### MOLDING

Suggested method of assembly to cable for Aquacon plugs and cable connecting receptacles is molding. The mold sealing diameter has been designed to use a common mold for both plug and receptacle in a given shell size.

### SEALING

In a mated condition, the red visual mating indicator band must be fully concealed by the plug coupling nut to assure a reliable, pressure rated sealed joint. Failure to fully tighten the coupling nut may allow leakage through the main joint seal. The red visual mating indicator is so located that only a full and proper mating of the plug and receptacle will cause the indicator to be fully hidden by the plug coupling nut.




Red Visual Mating Indicator Band

### MOUNTING SURFACES

The integrity of an "O" ring hydrostatic shell is dependent upon the flatness of the surface on which the receptacle is mounted. Surface finishes of 23 microns or less are recommended for "O" ring sealing areas when jam nut or through bulkhead receptacles are mounted.

MOUNTING CUTOUTS



Rear mount jam nut

| Shell Size | B<br>+.010<br>-.000 | R<br>+.010<br>-.000 |
|------------|---------------------|---------------------|
| 8          | .705                | .759                |
| 10         | .830                | .884                |
| 12         | .955                | 1.007               |
| 14         | 1.080               | 1.134               |
| 16         | 1.205               | 1.259               |
| 18         | 1.330               | 1.384               |
| 20         | 1.455               | 1.507               |
| 22         | 1.580               | 1.634               |
| 24         | 1.705               | 1.759               |

### RECEPTACLE "O" RING RACKING REQUIREMENTS ARP 568 UNIFORM DASH NUMBER

| Shell Size | Main Joint Seal | Shell to Mounting Surface Seal |
|------------|-----------------|--------------------------------|
|            |                 | Jam Nut                        |
| 8          | ARP-014         | ARP-019                        |
| 10         | ARP-016         | ARP-021                        |
| 12         | ARP-018         | ARP-023                        |
| 14         | ARP-020         | ARP-025                        |
| 16         | ARP-022         | ARP-027                        |
| 18         | ARP-024         | ARP-029                        |
| 20         | ARP-026         | ARP-030                        |
| 22         | ARP-028         | ARP-031                        |
| 24         | ARP-029         | ARP-032                        |

### WIRE AND CABLE PREPARATION

1. Cut wire or cable to desired length. Strip insulation from end of wire in accordance with the following table. Hot wire stripping methods are recommended. Avoid nicking or cutting wire strands.

### WIRE STRIP LENGTH IN INCHES

| Contact Type | Contact Size |     |     |            |      |    |
|--------------|--------------|-----|-----|------------|------|----|
|              | 22M          | 22D | 22  | 20         | 16   | 12 |
| Solder       | 1/8          | —   | 1/8 | 5/32       | 5/32 |    |
| Crimp        | 1/8 – 5/32   |     |     | 7/32 – 1/4 |      |    |

### SOLDER CONTACT TERMINATION

1. Clean conductors and pre-tin with a good grade 60/40 tin-lead solder to 1/16 inch.
2. Pre-tin contact solder well.
3. With connector in a suitable holding device, solder wells facing operator, and the cutaway portion of the wells up, insert pre-tinned conductor into contact well. Apply heat to closed side of wire well to make joint. Remove heat and allow joint to cool.
4. A resistance soldering unit of approximately 125 watts is recommended. If a soldering iron is used, do not exceed 20 watts for size 22M, 22D and 22 contacts; 80 watts for size 20; and 150 watts for size 16 and 12 contacts.
5. Wipe or brush excess flux from terminations.



**2M805**  
Tri-Start

**2M804**  
Push-Pull

**2M803**  
Bayonet

**2M801**  
Dual-Start



## The New Aerospace Standard

The New Circular Connector Standard. Smaller, lighter, higher contact density, and just as durable as D38999 Mil-spec connectors.

### FEATURES:

- 4 Coupling Styles
- Integral Backshells
- PC Tail Termination Available
- 60% Weight Reduction from 38999
- 50% Size Reduction from 38999

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

## 2M Series Selection Table

2M801, 2M803, 2M804 and 2M805




| SERIES                 | 2M805                                                                                                         | 2M804                                                                                                                        | 2M803                                                                                                       | 2M801                                                                                          |
|------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Pages                  | Pages 56-60                                                                                                   | Pages 61-64                                                                                                                  | Pages 65-67                                                                                                 | Page 68-72                                                                                     |
| TYPE                   | Tri-Start ACME Thread                                                                                         | Push-Pull                                                                                                                    | Bayonet                                                                                                     | Dual-Start ACME Thread                                                                         |
| DESCRIPTION            | "Anti-Decoupling" ratchet mechanism and ground spring for military airframes and avionics boxes. Fast mating. | Breakaway connector for headsets and tactical equipment. Gold-plated spring for long mating life and superior EMI shielding. | Quick-mating, light duty, general purpose. Not rated for immersion, 50 milliohms shell-to-shell resistance. | More rugged keys and threads. Faster mating.                                                   |
| CONTACTS               | 1 to 130                                                                                                      | 1 to 85                                                                                                                      | 1 to 55                                                                                                     | 1 to 130                                                                                       |
| COUPLING               | Tri-Start Thread                                                                                              | Push, Pull<br>Quick-Disconnect                                                                                               | 1/4 turn lock Bayonet                                                                                       | Threaded Coupling with 1 1/2 Turns to Full Mate                                                |
| WATER IMMERSION, MATED | MIL-STD-810 Method 512<br>1 Meter for 1 Hour                                                                  | MIL-STD-810 Method 512 1<br>Meter for 1 Hour                                                                                 | Splash proof                                                                                                | MIL-STD-810 Method 512<br>1 Meter for 1 Hour                                                   |
| EMI SHIELDING          | Excellent                                                                                                     | Excellent                                                                                                                    | Fair                                                                                                        | Very Good                                                                                      |
| VIBRATION AND SHOCK    | 43.9 g's Random<br>Vibration, Sine Vibration 60<br>g; 300 g's Shock                                           | 37 g's Random<br>Vibration; 300 g's Shock                                                                                    | 37 g's Random<br>Vibration; 300 g's Shock                                                                   | 43.9 g's Random<br>Vibration, Sine Vibration<br>60 g; 300 g's Shock                            |
| MATING CYCLES          | 500 Cycles                                                                                                    | 2000 Cycles                                                                                                                  | 1000 Cycles Aluminum<br>2000 Cycles Stainless Steel                                                         | 2000 Cycles (-16 Plugs)<br>500 Cycles (-26 Plugs)                                              |
| ELECTRICAL PERFORMANCE | #12: 23 AMP, 1800 VAC<br>#16: 13 AMP, 1800 VAC<br>#20: 7.5 AMP, 750 VAC<br>#23: 5 AMP, 500 VAC                | #12: 23 AMP, 1800 VAC<br>#16: 13 AMP, 1800 VAC<br>#20: 7.5 AMP, 750 VAC<br>#23: 5 AMP, 500 VAC                               | #12: 23 AMP, 1800 VAC<br>#16: 13 AMP, 1800 VAC<br>#20: 7.5 AMP, 750 VAC<br>#23: 5 AMP, 500 VAC              | #12: 23 AMP, 1800 VAC<br>#16: 13 AMP, 1800 VAC<br>#20: 7.5 AMP, 750 VAC<br>#23: 5 AMP, 500 VAC |

# 2M Series Technical Information


## Insert Arrangements

Front face of pin inserts illustrated (Socket Reversed)


CONTACT LEGEND  12  16  20  20HD  20  23

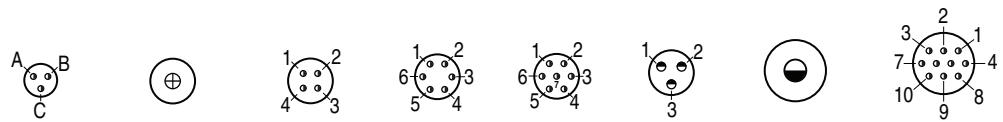


|                          |            |             |            |            |            |             |             |             |
|--------------------------|------------|-------------|------------|------------|------------|-------------|-------------|-------------|
| <b>2M801 2M803 2M804</b> | <b>5-3</b> | <b>6-1*</b> | <b>6-4</b> | <b>6-6</b> | <b>6-7</b> | <b>6-23</b> | <b>7-1*</b> | <b>7-10</b> |
| <b>2M805</b>             | <b>NA</b>  | <b>8-1*</b> | <b>8-4</b> | <b>8-6</b> | <b>8-7</b> | <b>8-23</b> | <b>9-1*</b> | <b>9-10</b> |
| No. of Contacts          | 3          | 1           | 4          | 6          | 7          | 3           | 1           | 10          |
| Contact Size             | #23        | #16         | #23        | #23        | #23        | #20HD       | #12         | #23         |
| DWV Voltage (VAC)        | 500        | 1800        | 500        | 500        | 500        | 750         | 1800        | 500         |
| Current Rating (Amps)    | 5          | 13          | 5          | 5          | 5          | 7.5         | 23          | 5           |

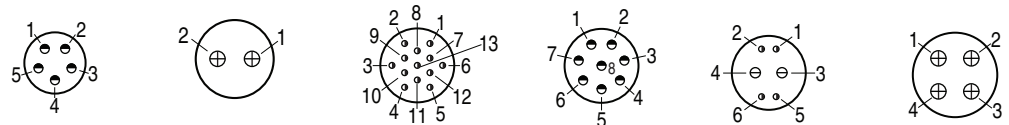

|                          |             |             |              |              |                |     |             |
|--------------------------|-------------|-------------|--------------|--------------|----------------|-----|-------------|
| <b>2M801 2M803 2M804</b> | <b>7-25</b> | <b>8-2</b>  | <b>8-13</b>  | <b>8-28</b>  | <b>8-200*</b>  |     | <b>9-4</b>  |
| <b>2M805</b>             | <b>9-25</b> | <b>10-2</b> | <b>10-13</b> | <b>10-28</b> | <b>10-200*</b> |     | <b>11-4</b> |
| No. of Contacts          | 5           | 2           | 13           | 8            | 2              | 4   | 4           |
| Contact Size             | #20HD       | #16         | #23          | #20HD        | #20            | #23 | #16         |
| DWV Voltage (VAC)        | 750         | 1800        | 500          | 750          | 1000           | 500 | 1800        |
| Current Rating (Amps)    | 7.5         | 13          | 5            | 7.5          | 7              | 5   | 13          |

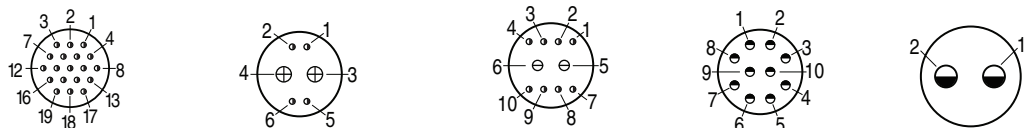

|                          |              |               |     |               |               |             |
|--------------------------|--------------|---------------|-----|---------------|---------------|-------------|
| <b>2M801 2M803 2M804</b> | <b>9-19</b>  | <b>9-200</b>  |     | <b>9-201</b>  | <b>9-210</b>  | <b>10-2</b> |
| <b>2M805</b>             | <b>11-19</b> | <b>11-200</b> |     | <b>11-201</b> | <b>11-210</b> | <b>12-2</b> |
| No. of Contacts          | 19           | 2             | 4   | 2             | 8             | 2           |
| Contact Size             | #23          | #16           | #23 | #20           | #23           | #12         |
| DWV Voltage (VAC)        | 500          | 1800          | 500 | 1000          | 500           | 1800        |
| Current Rating (Amps)    | 5            | 13            | 5   | 7.5           | 5             | 23          |

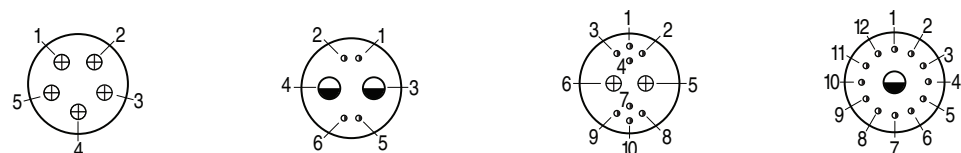





|                          |             |               |     |                |     |                |     |
|--------------------------|-------------|---------------|-----|----------------|-----|----------------|-----|
| <b>2M801 2M803 2M804</b> | <b>10-5</b> | <b>10-201</b> |     | <b>10-202*</b> |     | <b>10-200*</b> |     |
| <b>2M805</b>             | <b>12-5</b> | <b>12-201</b> |     | <b>12-202*</b> |     | <b>12-200*</b> |     |
| No. of Contacts          | 5           | 2             | 4   | 2              | 8   | 1              | 12  |
| Contact Size             | #16         | #12           | #23 | #16            | #23 | #12            | #23 |
| DWV Voltage (VAC)        | 1800        | 1800          | 500 | 1800           | 500 | 1800           | 500 |
| Current Rating (Amps)    | 13          | 23            | 5   | 13             | 5   | 23             | 5   |

# 2M Series Technical Information





## Insert Arrangements

Front face of pin inserts illustrated (Socket Reversed)





CONTACT LEGEND  12  16  20  20HD  20  23



|                       |              |             |              |             |
|-----------------------|--------------|-------------|--------------|-------------|
| <b>2M801</b>          | <b>10-26</b> | <b>13-2</b> | <b>13-3*</b> | <b>13-7</b> |
| <b>2M803 2M804</b>    | <b>10-26</b> | <b>12-2</b> | <b>12-3*</b> | <b>12-7</b> |
| <b>2M805</b>          | <b>12-26</b> | <b>15-2</b> | <b>15-3*</b> | <b>15-7</b> |
| No. of Contacts       | 26           | 2           | 3            | 7           |
| Contact Size          | #23          | #12         | #12          | #16         |
| DWV Voltage (VAC)     | 500          | 1800        | 1800         | 1800        |
| Current Rating (Amps) | 5            | 23          | 23           | 13          |



|                       |              |                |               |               |
|-----------------------|--------------|----------------|---------------|---------------|
| <b>2M801</b>          | <b>13-37</b> | <b>13-200*</b> | <b>13-201</b> | <b>13-220</b> |
| <b>2M803 2M804</b>    | <b>12-37</b> | <b>12-200</b>  | <b>12-201</b> | <b>12-220</b> |
| <b>2M805</b>          | <b>15-37</b> | <b>15-200*</b> | <b>15-201</b> | <b>15-220</b> |
| No. of Contacts       | 37           | 2   6          | 2   10        | 20            |
| Contact Size          | #23          | #12   #23      | #12   #23     | #20HD         |
| DWV Voltage (VAC)     | 500          | 1800   500     | 1800   500    | 750           |
| Current Rating (Amps) | 5            | 23   5         | 23   5        | 7.5           |




|                       |             |              |              |               |
|-----------------------|-------------|--------------|--------------|---------------|
| <b>2M801</b>          | <b>16-5</b> | <b>16-55</b> | <b>16-12</b> | <b>16-235</b> |
| <b>2M803 2M804</b>    | <b>14-5</b> | <b>14-55</b> | <b>14-12</b> | <b>14-235</b> |
| <b>2M805</b>          | <b>18-5</b> | <b>18-55</b> | <b>18-12</b> | <b>18-235</b> |
| No. of Contacts       | 5           | 55           | 12           | 35            |
| Contact Size          | #12         | #23          | #16          | #20HD         |
| DWV Voltage (VAC)     | 1800        | 500          | 1800         | 750           |
| Current Rating (Amps) | 23          | 5            | 13           | 7.5           |

\*Not tooled for every insert pattern


# 2M Series Technical Reference

## Insert Arrangements


Front face of pin inserts illustrated (Socket Reversed)

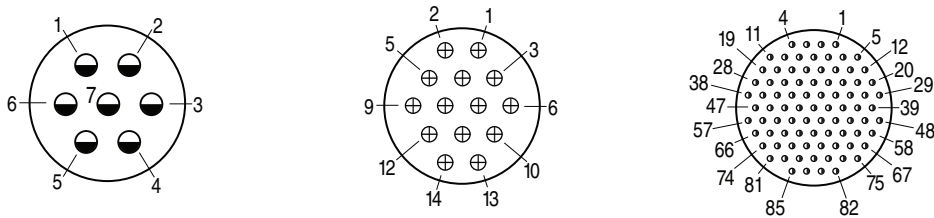

|                       |      |        |       |
|-----------------------|------|--------|-------|
| 2M801                 | 17-7 | 17-14* | 17-85 |
| 2M803 2M804           | 15-7 | 15-14  | 15-85 |
| 2M805                 | 19-7 | 19-14* | 19-85 |
| No. of Contacts       | 7    | 14     | 85    |
| Contact Size          | #12  | #16    | #23   |
| DWV Voltage (VAC)     | 1800 | 1800   | 500   |
| Current Rating (Amps) | 23   | 13     | 5     |

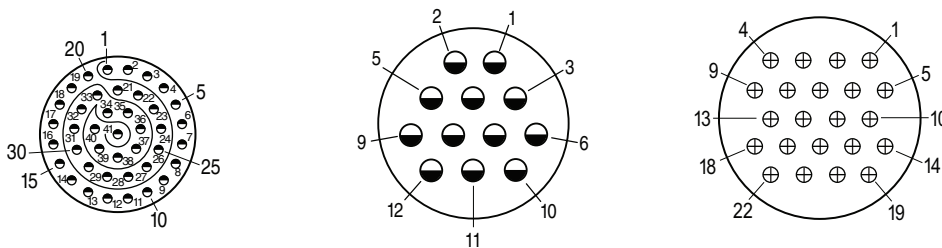

|                       |         |       |        |
|-----------------------|---------|-------|--------|
| 2M801                 | 17-241* | 21-12 | 21-22* |
| 2M805                 | 19-241* | 23-12 | 23-22* |
| No. of Contacts       | 41      | 12    | 22     |
| Contact Size          | #20HD   | #12   | #16    |
| DWV Voltage (VAC)     | 750     | 1800  | 1800   |
| Current Rating (Amps) | 7.5     | 23    | 13     |

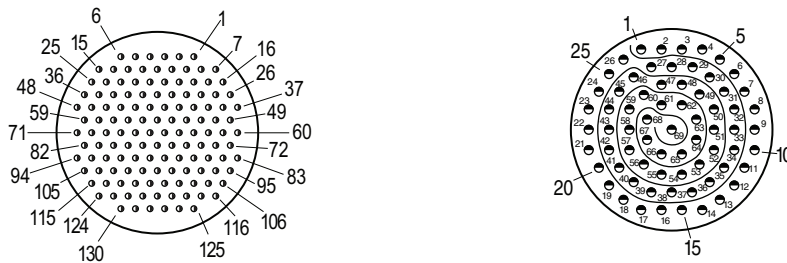

|                       |        |        |
|-----------------------|--------|--------|
| 2M801                 | 21-130 | 21-269 |
| 2M805                 | 23-130 | 23-269 |
| No. of Contacts       | 130    | 69     |
| Contact Size          | #23    | #20HD  |
| DWV Voltage (VAC)     | 500    | 750    |
| Current Rating (Amps) | 5      | 7.5    |

\*Not tooled for every insert pattern



#### FEATURES:

- Low profile shells for minimum box protrusion
- Shell Standoffs for PC Board washout
- Non-removable PC and/or Solder cup contacts

# 2M805 Tri-Start

2M805 Series of Hermetic Receptacles provide superior sealing of  $1 \times 10^{-8}$  cc/second helium leak rate and are 100% tested prior to shipping. This superior sealing is accomplished through the use of glass insulator fused to stainless steel shells and iron alloy contacts.

# 2M805 Tri-Start Hermetic Receptacle

## Ordering Guide for 2M805-006

| 1.        | 2.         | 3.            | 4.                      | 5.       | 6.     |
|-----------|------------|---------------|-------------------------|----------|--------|
| Series    | Shell Size | Service Class | Shell Size-Insert Aggmt | Contacts | Keying |
| 2M805-006 | -07        | Z1            | 12-26                   | C        | A      |

Example Part Number

| 1. SERIES |                     |
|-----------|---------------------|
| Part #    | Description         |
| 2M805-006 | Hermetic Receptacle |


| 2. SHELL SIZE |                                            |
|---------------|--------------------------------------------|
| Part #        | Description                                |
| -02           | Square Flange                              |
| -03           | Weld Mount (only available in Z1 Finish)   |
| -07           | Jam Nut for Rear Panel Mounting Receptacle |

| 3. SERVICE CLASS |        |                     |                                                                                     |
|------------------|--------|---------------------|-------------------------------------------------------------------------------------|
| Material         | Part # | Description         | RoHS                                                                                |
| Stainless Steel  | Z1     | Passivated          |  |
|                  | ZL     | Electrolytic Nickel |  |

| 4. SHELL SIZE-INSERT ARRANGEMENT |
|----------------------------------|
| See Table on pages 53-55         |

| 5. CONTACTS |                                           |
|-------------|-------------------------------------------|
| Part #      | Description                               |
| P           | Pin- Solder Cup                           |
| C           | Pin-PC Tail                               |
| H           | Pin, Solder Cup- Without Interfacial Seal |
| Y           | Pin, PC Tail- Without Interfacial Seal    |

| 6. KEYING |      |      |
|-----------|------|------|
| Part #    | A°   | B°   |
| A         | 150° | 210° |
| B         | 75°  | 210° |
| C         | 95°  | 230° |
| D         | 140° | 275° |



Note: Please contact the factory directly for a listing of tooled interfacial seals for the hermetically sealed connectors.

Please note, Amphenol standard 2M hermetic connector are provided less the interfacial seal. Please contact the factory for availability on the interfacial seal.

38999 III

38999 II

38999 I

SJT

Aquacon

2M805


83723

26482

26500

# 2M805 Tri-Start Flange Mount Hermetic

2M805-006-02

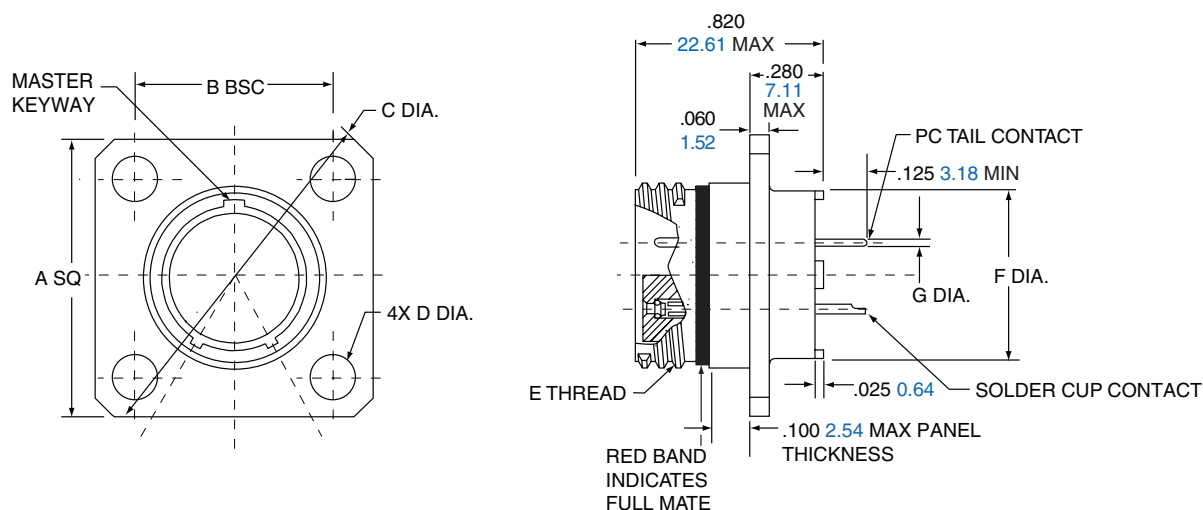


Inches-Millimeters

| Shell Size | A Sq. |       | B BSC. |       | C Dia. |       | D Dia.    |          | E Threads            | F Dia. |       | G PC Tail Dia.               |
|------------|-------|-------|--------|-------|--------|-------|-----------|----------|----------------------|--------|-------|------------------------------|
|            | in.   | mm.   | in.    | mm.   | in.    | mm.   | in. ±.003 | mm. ±.08 |                      | in.    | mm.   |                              |
| 8          | .853  | 21.67 | .660   | 16.76 | 1.153  | 29.29 | .091      | 2.31     | .5000-.1P-.3L-TS-2A  | .330   | 8.38  | <b>#23</b><br>.018/.022      |
| 9          | .916  | 23.27 | .723   | 18.36 | 1.233  | 31.32 | .091      | 2.31     | .5625-.1P-.3L-TS-2A  | .432   | 10.97 | 0.46/0.56                    |
| 10         | .978  | 24.84 | .785   | 19.94 | 1.333  | 33.86 | .091      | 2.31     | .6250-.1P-.3L-TS-2A  | .493   | 12.52 | <b>#20/20HD</b><br>.024/.028 |
| 11         | 1.042 | 26.47 | .848   | 21.54 | 1.413  | 35.89 | .091      | 2.31     | .6875-.1P-.3L-TS-2A  | .551   | 14.00 | 0.64/0.69                    |
| 12         | 1.102 | 27.99 | .909   | 23.09 | 1.503  | 38.18 | .091      | 2.31     | .7500-.1P-.3L-TS-2A  | .622   | 15.80 | <b>#16</b><br>.060/.064      |
| 15         | 1.291 | 32.79 | 1.058  | 26.87 | 1.753  | 44.53 | .125      | 3.18     | .9375-.1P-.3L-TS-2A  | .703   | 17.86 | 1.521/1.63                   |
| 18         | 1.478 | 37.54 | 1.255  | 31.88 | 2.003  | 50.88 | .125      | 3.18     | 1.1250-.1P-.3L-TS-2A | .863   | 21.92 | <b>#12</b><br>.092/.096      |
| 19         | 1.540 | 39.12 | 1.327  | 33.71 | 2.097  | 53.26 | .125      | 3.18     | 1.1875-.1P-.3L-TS-2A | .912   | 23.16 | 2.34/2.44                    |
| 23         | 1.790 | 45.47 | 1.570  | 39.88 | 2.443  | 62.05 | .125      | 3.18     | 1.4375-.1P-.3L-TS-2A | 1.163  | 29.54 |                              |



# 2M805 Tri-Start Solder Mount Hermetic

2M805-006-03

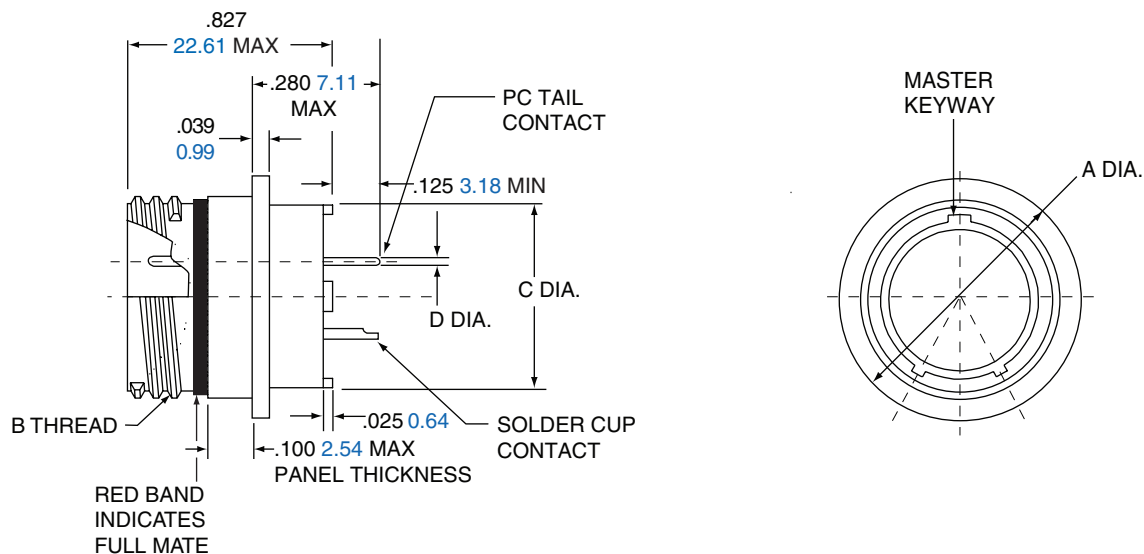



Inches-Millimeters

| Shell Size | A Dia. |       | B Threads            | C Dia. |       | D PC Tail Dia.                            |
|------------|--------|-------|----------------------|--------|-------|-------------------------------------------|
|            | in.    | mm.   |                      | in.    | mm.   |                                           |
| 8          | .625   | 15.88 | .5000-.1P-.3L-TS-2A  | .330   | 8.38  | <b>#23</b><br>.018/.022<br>0.46/0.56      |
| 9          | .688   | 17.48 | .5625-.1P-.3L-TS-2A  | .432   | 10.97 |                                           |
| 10         | .750   | 19.75 | .6250-.1P-.3L-TS-2A  | .493   | 12.52 | <b>#20/20HD</b><br>.025/.027<br>0.64/0.69 |
| 11         | .812   | 20.62 | .6875-.1P-.3L-TS-2A  | .551   | 14.00 |                                           |
| 12         | .875   | 22.23 | .7500-.1P-.3L-TS-2A  | .620   | 15.78 | <b>#16</b><br>.060/.064<br>1.521/1.63     |
| 15         | 1.062  | 26.97 | .9375-.1P-.3L-TS-2A  | .703   | 17.86 |                                           |
| 18         | 1.250  | 31.75 | 1.1250-.1P-.3L-TS-2A | .863   | 21.92 | <b>#12</b><br>.092/.096<br>2.34/2.44      |
| 19         | 1.312  | 33.32 | 1.1875-.1P-.3L-TS-2A | .912   | 23.16 |                                           |
| 23         | 1.563  | 39.70 | 1.4375-.1P-.3L-TS-2A | 1.162  | 29.51 |                                           |

# 2M805 Tri-Start Jam Nut Hermetic


2M805-006-07

2M805-006-07

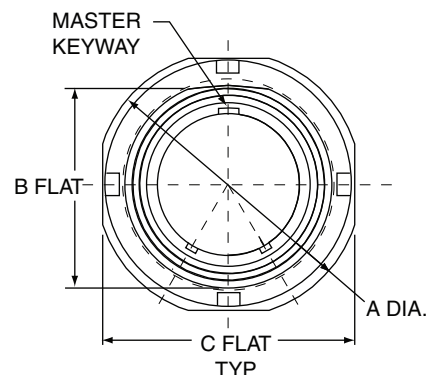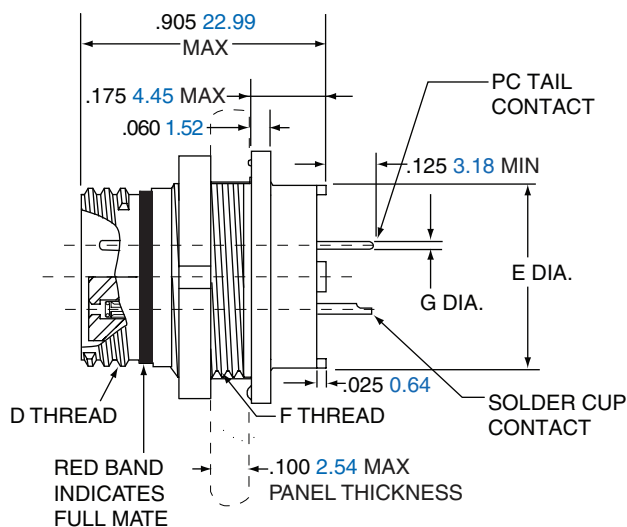

Inches-Millimeters


| Shell Size | A Dia. |       | B Flat |       | C Flat |       | D Threads            | E Dia. |       | F Threads       | G PC Tail Dia.                         |
|------------|--------|-------|--------|-------|--------|-------|----------------------|--------|-------|-----------------|----------------------------------------|
|            | in.    | mm.   | in.    | mm.   | in.    | mm.   |                      | in.    | mm.   |                 |                                        |
| 8          | .760   | 19.30 | .535   | 13.59 | .730   | 18.54 | .5000-.1P-.3L-TS-2A  | .330   | 8.38  | .5625-28 UN-2A  | <b>#23</b><br>.018/.022 0.46/0.56      |
| 9          | .880   | 22.35 | .661   | 16.79 | .850   | 21.59 | .5625-.1P-.3L-TS-2A  | .432   | 10.97 | .6875-28 UN-2A  | <b>#20/20HD</b><br>.024/.028 0.64/0.69 |
| 10         | .880   | 22.35 | .661   | 16.79 | .850   | 21.59 | .6250-.1P-.3L-TS-2A  | .493   | 12.52 | .6875-28 UN-2A  |                                        |
| 11         | .955   | 24.26 | .721   | 18.31 | .925   | 23.50 | .6875-.1P-.3L-TS-2A  | .551   | 14.00 | .7500-28 UN-2A  | <b>#16</b><br>.060/.064 1.521/1.63     |
| 12         | 1.060  | 26.92 | .784   | 19.91 | 1.035  | 26.29 | .7500-.1P-.3L-TS-2A  | .620   | 15.78 | .8125-28 UN-2A  |                                        |
| 15         | 1.203  | 30.56 | .970   | 24.64 | 1.173  | 29.79 | .9375-.1P-.3L-TS-2A  | .703   | 17.86 | 1.0000-28 UN-2A | <b>#12</b><br>.092/.096 2.34/2.44      |
| 18         | 1.389  | 35.28 | 1.147  | 29.13 | 1.359  | 34.52 | 1.1250-.1P-.3L-TS-2A | .863   | 21.92 | 1.1875-28 UN-2A |                                        |
| 19         | 1.450  | 36.83 | 1.221  | 31.01 | 1.420  | 36.07 | 1.1875-.1P-.3L-TS-2A | .912   | 23.16 | 1.2500-28 UN-2A |                                        |
| 23         | 1.705  | 43.31 | 1.470  | 37.34 | 1.675  | 42.55 | 1.4375-.1P-.3L-TS-2A | 1.162  | 29.51 | 1.5000-28 UN-2A |                                        |



| PANEL CUTOUT FOR JAM NUT |              |               |              |               |
|--------------------------|--------------|---------------|--------------|---------------|
| Shell Size               | A Flat       |               | B Dia        |               |
|                          | in.<br>±.002 | mm.<br>± 0.05 | in.<br>±.005 | mm.<br>± 0.13 |
| 8                        | .543         | 13.79         | .572         | 14.53         |
| 9                        | .669         | 16.99         | .698         | 17.73         |
| 10                       | .669         | 16.99         | .698         | 17.73         |
| 11                       | .729         | 18.51         | .760         | 19.30         |
| 12                       | .792         | 20.17         | .822         | 20.88         |
| 15                       | .978         | 24.84         | 1.010        | 25.65         |
| 18                       | 1.155        | 29.34         | 1.198        | 30.43         |
| 19                       | 1.231        | 31.27         | 1.260        | 32.00         |
| 23                       | 1.480        | 37.59         | 1.510        | 38.35         |

# 2M804

## Push-Pull

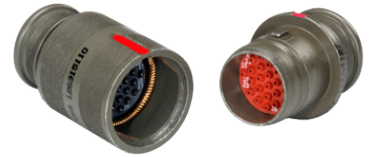

### FEATURES:

- Push-pull coupling
- Excellent EMI shielding
- Rated to 38999 immersions
- Quick-disconnect

2M804 Series of Hermetic Receptacles provide superior sealing of  $1 \times 10^{-8}$  cc/second helium leak rate and are 100% tested prior to shipping. This superior sealing is accomplished through the use of glass insulator fused to stainless steel shells and iron alloy contacts.

# 2M804 Push-Pull Hermetic Receptacle

Ordering Guide for 2M804-006

38999 III

38999 II

38999 I

SJT

Aquacon

2M804

83723

26482

26500

| 1.               | 2.         | 3.            | 4.                      | 5.       | 6.       |
|------------------|------------|---------------|-------------------------|----------|----------|
| Series           | Shell Size | Service Class | Shell Size-Insert Aggmt | Contacts | Keying   |
| <b>2M804-006</b> | <b>-07</b> | <b>Z1</b>     | <b>9-19</b>             | <b>P</b> | <b>A</b> |

Example Part Number

| 1. SERIES        |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| Part #           | Description                                                                     |
| <b>2M804-006</b> | Hermetic Receptacle with Printed Circuit Board Contacts or Solder Cup Contacts. |


| 2. SHELL SIZE |                                            |
|---------------|--------------------------------------------|
| Part #        | Description                                |
| <b>-00</b>    | Jam Nut for Front Panel Mounting           |
| <b>-07</b>    | Jam Nut for Rear Panel Mounting Receptacle |

| 3. SERVICE CLASS |           |                     |                                                                                       |
|------------------|-----------|---------------------|---------------------------------------------------------------------------------------|
| Material         | Part #    | Description         | RoHS                                                                                  |
| Stainless Steel  | <b>Z1</b> | Passivated          |  |
|                  | <b>ZL</b> | Electrolytic Nickel |  |

| 4. SHELL SIZE-INSERT ARRANGEMENT |
|----------------------------------|
| See Table pg 53-55               |

| 5. CONTACTS |                                           |
|-------------|-------------------------------------------|
| Part #      | Description                               |
| <b>P</b>    | Pin- Solder Cup                           |
| <b>C</b>    | Pin-PC Tail                               |
| <b>H</b>    | Pin, Solder Cup- Without Interfacial Seal |
| <b>Y</b>    | Pin, PC Tail- Without Interfacial Seal    |


| 6. KEYING |      |      |
|-----------|------|------|
| Part #    | A°   | B°   |
| <b>A</b>  | 150° | 210° |
| <b>B</b>  | 75°  | 210° |
| <b>C</b>  | 95°  | 230° |
| <b>D</b>  | 140° | 275° |




Note: Please contact the factory directly for a listing of tooled interfacial seals for the hermetically sealed connectors. Please note, Amphenol standard 2M hermetic connector are provided less the interfacial seal. Please contact the factory for availability on the interfacial seal.

# 2M804 Push-Pull Rear Panel Jam Nut Hermetic

2M804-006-07

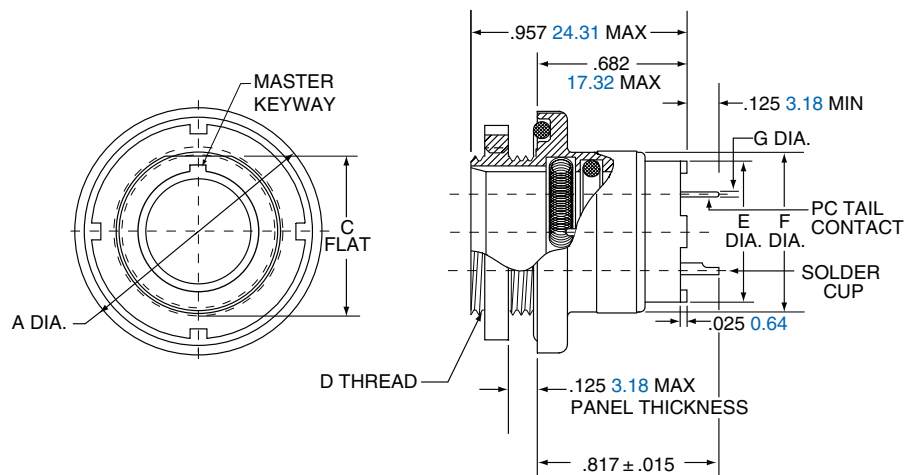


| Shell Size | A Dia. |       | C Flat |       | D Thread<br>UN-2A | E Dia. |       | F Dia. |       | G PC Tail Dia.                     |
|------------|--------|-------|--------|-------|-------------------|--------|-------|--------|-------|------------------------------------|
|            | in.    | mm.   | in.    | mm.   |                   | in.    | mm.   | in.    | mm.   |                                    |
| 5          | .773   | 19.63 | .414   | 10.52 | .4375-32          | .274   | 6.96  | .448   | 11.38 | #23<br>.018/.022<br>0.46/0.56      |
| 6          | .833   | 21.16 | .468   | 11.89 | .5000-32          | .329   | 8.36  | .513   | 13.03 |                                    |
| 7          | .903   | 22.94 | .593   | 15.06 | .6250-28          | .431   | 10.95 | .573   | 14.55 |                                    |
| 8          | .958   | 24.33 | .593   | 15.06 | .6250-28          | .493   | 12.52 | .596   | 15.14 | #20/20HD<br>.025/.027<br>0.64/0.69 |
| 9          | .998   | 25.35 | .653   | 16.59 | .6875-28          | .551   | 14.00 | .691   | 17.55 |                                    |
| 10         | 1.083  | 27.51 | .721   | 18.31 | .7500-28          | .619   | 15.72 | .728   | 18.49 |                                    |
| 12         | 1.183  | 30.05 | .843   | 21.41 | .8750-28          | .703   | 17.86 | .883   | 22.43 | #16<br>.060/.064<br>1.52/1.63      |
| 14         | 1.323  | 33.60 | .968   | 24.59 | 1.0000-28         | .863   | 21.92 | 1.003  | 25.48 |                                    |
| 15         | 1.373  | 34.87 | 1.036  | 26.31 | 1.0625-20         | .913   | 23.19 | 1.063  | 27.00 | #12<br>.092/.096<br>2.34/2.44      |




| JAM NUT PANEL CUTOUT |              |               |              |               |
|----------------------|--------------|---------------|--------------|---------------|
| Shell Size           | A Flat       |               | B Dia.       |               |
|                      | in.<br>±.002 | mm.<br>± 0.05 | in.<br>±.005 | mm.<br>± 0.13 |
| 5                    | .423         | 10.74         | .448         | 11.38         |
| 6                    | .475         | 12.07         | .510         | 12.95         |
| 7                    | .602         | 15.29         | .635         | 16.13         |
| 8                    | .602         | 15.29         | .635         | 16.13         |
| 9                    | .663         | 16.84         | .698         | 17.73         |
| 10                   | .729         | 18.82         | .760         | 19.30         |
| 12                   | .851         | 21.62         | .885         | 22.48         |
| 14                   | .976         | 24.79         | 1.010        | 25.65         |

# 2M804 Front Panel Jam Nut Hermetic

2M804-006-00

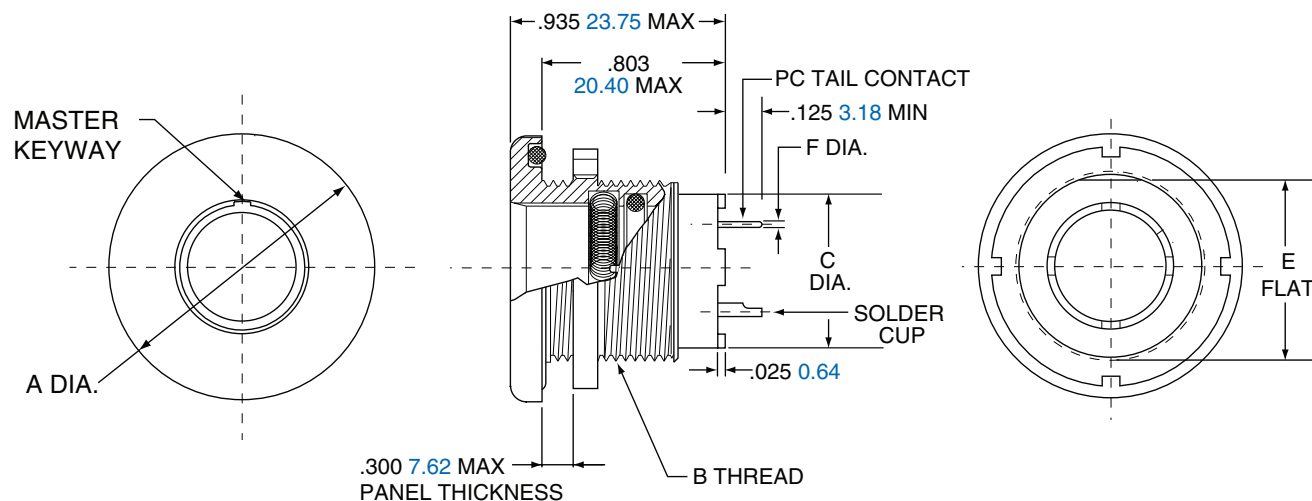

| Shell Size | A Dia. |       | B Thread UN-2A | C Dia. |       | E Flat. |       | F PC Tail Dia.                            |
|------------|--------|-------|----------------|--------|-------|---------|-------|-------------------------------------------|
|            | in.    | mm.   |                | in.    | mm.   | in.     | mm.   |                                           |
| 5          | .830   | 21.08 | .5000-32       | .274   | 6.96  | .470    | 11.94 | <b>#23</b><br>.018/.022<br>0.46/0.56      |
| 6          | .884   | 22.45 | .5625-32       | .329   | 8.36  | .529    | 13.44 | <b>#20/20HD</b><br>.025/.027<br>0.64/0.69 |
| 7          | .994   | 25.25 | .6875-28       | .431   | 10.95 | .663    | 16.84 | <b>#16</b><br>.060/.064<br>1.52/1.63      |
| 8          | .994   | 25.25 | .6875-28       | .493   | 12.52 | .663    | 16.84 | <b>#12</b><br>.092/.096<br>2.34/2.44      |
| 9          | 1.073  | 27.25 | .7500-28       | .551   | 14.00 | .719    | 18.26 |                                           |
| 10         | 1.138  | 28.91 | .8125-28       | .619   | 15.72 | .778    | 19.76 |                                           |
| 12         | 1.338  | 33.99 | 1.0000-28      | .703   | 17.86 | .969    | 24.61 |                                           |
| 14         | 1.388  | 35.26 | 1.0625-20      | .863   | 21.92 | 1.019   | 25.88 |                                           |
| 15         | 1.453  | 36.91 | 1.1250-28      | .913   | 23.19 | 1.113   | 28.27 |                                           |



| JAM NUT PANEL CUTOUT |              |               |              |               |
|----------------------|--------------|---------------|--------------|---------------|
| Shell Size           | A Flat       |               | B Dia.       |               |
|                      | in.<br>±.002 | mm.<br>± 0.05 | in.<br>±.005 | mm.<br>± 0.13 |
| 5                    | .477         | 12.12         | .510         | 12.95         |
| 6                    | .537         | 13.64         | .635         | 16.13         |
| 7                    | .670         | 17.02         | .635         | 16.13         |
| 8                    | .670         | 17.02         | .698         | 17.73         |
| 9                    | .727         | 18.47         | .760         | 19.30         |
| 10                   | .787         | 19.81         | .885         | 22.48         |
| 12                   | .977         | 24.82         | 1.010        | 25.65         |
| 14                   | 1.027        | 26.09         | 1.073        | 27.25         |
| 15                   | 1.120        | 28.45         | 1.135        | 28.83         |

# 2M803

## Bayonet

### FEATURES:

- Low profile shells for minimum box protrusion
- Shell Standoffs for PC Board washout
- Non-removable PC and/or Solder cup contacts

2M803 Series of Hermetic Receptacles provide superior sealing of 1x10<sup>-8</sup> cc/second helium leak rate and are 100% tested prior to shipping. This superior sealing is accomplished through the use of glass insulator fused to stainless steel shells and iron alloy contacts.

# 2M803 Hermetic

## Ordering Guide for 2M803-006 Receptacles

| 1.               | 2.         | 3.            | 4.                       | 5.       | 6.       |
|------------------|------------|---------------|--------------------------|----------|----------|
| Series           | Shell Size | Service Class | Shell Size-Insert Arrgmt | Contacts | Keying   |
| <b>2M803-006</b> | <b>-07</b> | <b>Z1</b>     | <b>6-7</b>               | <b>P</b> | <b>A</b> |

Example Part Number

| 1. SERIES        |                                                               |
|------------------|---------------------------------------------------------------|
| Part #           | Description                                                   |
| <b>2M803-006</b> | Hermetic Receptacles with PCB Contacts or Solder Cup Contacts |

| 2. SHELL SIZE |              |
|---------------|--------------|
| Part #        | Description  |
| <b>-02</b>    | Flange Mount |
| <b>-07</b>    | Jam Nut      |

| 3. SERVICE CLASS |           |                     |                                                                                     |
|------------------|-----------|---------------------|-------------------------------------------------------------------------------------|
| Material         | Part #    | Description         |                                                                                     |
| Stainless Steel  | <b>Z1</b> | Passivated          |  |
|                  | <b>ZL</b> | Electrolytic Nickel |  |


| 4. SHELL SIZE-INSERT ARRANGEMENT |
|----------------------------------|
| See Table pg 53-55               |

Note: Please contact the factory directly for a listing of tooled interfacial seals for the hermetically sealed connectors.

Please note, Amphenol standard 2M hermetic connector are provided less the interfacial seal. Please contact the factory for availability on the interfacial seal.

| 5. CONTACTS |                                           |
|-------------|-------------------------------------------|
| Part #      | Description                               |
| <b>P</b>    | Pin- Solder Cup                           |
| <b>C</b>    | Pin-PC Tail                               |
| <b>H</b>    | Pin, Solder Cup- Without Interfacial Seal |
| <b>Y</b>    | Pin, PC Tail- Without Interfacial Seal    |

| 6. KEYING         |      |      |
|-------------------|------|------|
| Part #            | A°   | B°   |
| <b>N (NORMAL)</b> | 150° | 210° |
| <b>X</b>          | 75°  | 210° |
| <b>Y</b>          | 95°  | 230° |
| <b>Z</b>          | 140° | 275° |







# 2M803 Hermetic



Flange Mount and Jam Nut 2M803-006-02 and -07



## 2M803-006-02

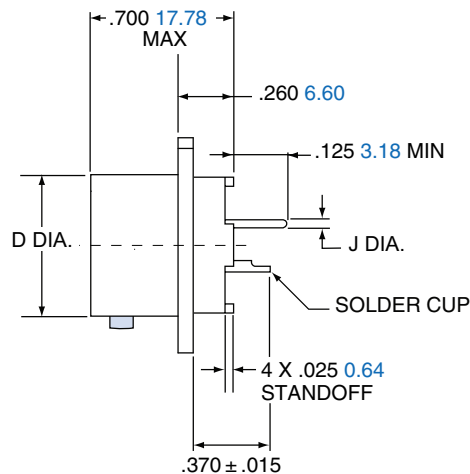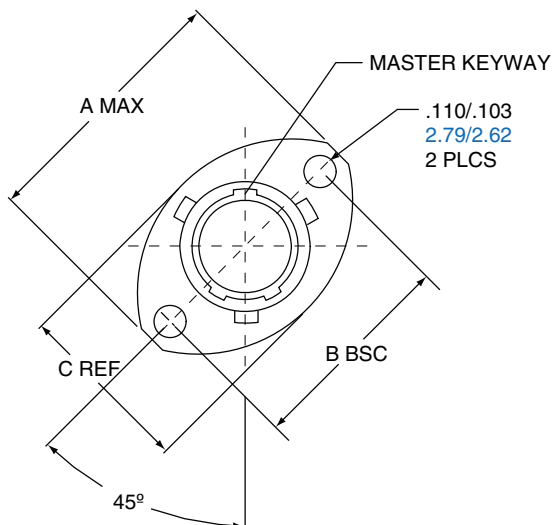

## 2M803-006-07

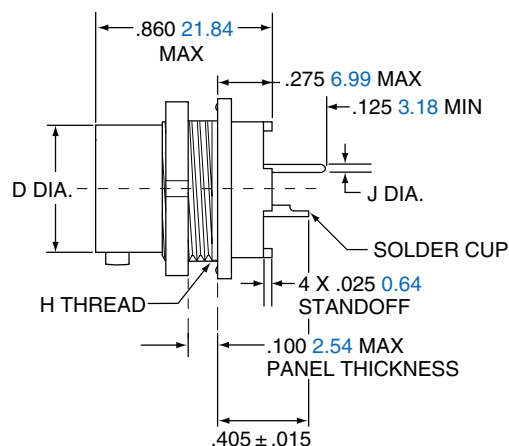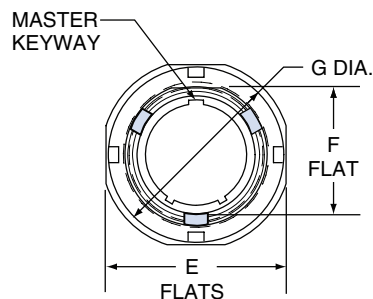

| Shell Size | A Max. |       | B BSC. |       | C Ref. |       | D Dia. |       | E Flats |       | F Flat |       | G Dia. |       | H Thread         | J PC Tail Dia.                     |
|------------|--------|-------|--------|-------|--------|-------|--------|-------|---------|-------|--------|-------|--------|-------|------------------|------------------------------------|
|            | in.    | mm    | in.    | mm    | in.    | mm    | in.    | mm    | in.     | mm    | in.    | mm    | in.    | mm    |                  |                                    |
| 5          | .710   | 18.03 | .513   | 13.03 | .460   | 11.68 | .300   | 7.62  | .545    | 13.84 | .350   | 8.89  | .575   | 14.61 | .3750-32 UNEF-2A | #23<br>.018/.022<br>0.46/0.56      |
| 6          | .788   | 20.02 | .598   | 15.19 | .522   | 13.26 | .362   | 9.19  | .595    | 15.11 | .410   | 10.42 | .635   | 16.13 | .4375-28 UNEF-2A | #20/20HD<br>.025/.027<br>0.64/0.69 |
| 7          | .895   | 22.73 | .708   | 17.98 | .590   | 14.99 | .436   | 11.07 | .723    | 18.36 | .536   | 13.61 | .755   | 19.18 | .5625-32 UN-2A   | #16<br>.060/.064<br>1.52/1.63      |
| 8          | 1.154  | 29.31 | .964   | 24.49 | .665   | 16.98 | .500   | 12.70 | .790    | 20.07 | .593   | 15.10 | .830   | 21.08 | .6250-28 UN-2A   | #12<br>.092/.096<br>2.34/2.44      |
| 9          | 1.210  | 30.73 | 1.017  | 25.83 | .721   | 18.31 | .561   | 14.25 | .790    | 20.07 | .596   | 15.14 | .830   | 21.08 | .6250-28 UN-2A   |                                    |
| 10         | 1.291  | 32.79 | 1.101  | 27.97 | .795   | 20.19 | .635   | 16.13 | .925    | 23.51 | .721   | .721  | .955   | 24.26 | .7500-28 UN-2A   |                                    |
| 12         | 1.395  | 35.43 | 1.204  | 30.58 | .874   | 22.20 | .714   | 18.14 | 1.044   | 26.52 | .845   | 21.46 | 1.078  | 27.38 | .8750-28 UN-2A   |                                    |
| 14         | 1.550  | 39.37 | 1.280  | 32.51 | 1.050  | 26.67 | .865   | 21.97 | 1.230   | 31.24 | 1.022  | 25.96 | 1.264  | 32.11 | 1.0625-20 UN-2A  |                                    |
| 15         | N/A    | N/A   | N/A    | N/A   | N/A    | N/A   | .924   | 23.47 | 1.287   | 32.69 | 1.093  | 27.76 | 1.322  | 33.58 | 1.1250-28 UN-2A  |                                    |



#### FEATURES:

- Low profile shells for minimum box protrusion
- Shell Standoffs for PC Board washout
- Non-removable PC and/or Solder cup contacts

# 2M801 Dual-Start

2M801 Series of Hermetic Receptacles provide superior sealing of  $1 \times 10^{-8}$  cc/second helium leak rate and are 100% tested prior to shipping. This superior sealing is accomplished through the use of glass insulator fused to stainless steel shells and iron alloy contacts.

# 2M801 Hermetic

## Ordering Guide for Hermetic Receptacle 2M801-012



| 1.        | 2.         | 3.            | 4.                      | 5.       | 6.     |
|-----------|------------|---------------|-------------------------|----------|--------|
| Series    | Shell Size | Service Class | Shell Size-Insert Aggmt | Contacts | Keying |
| 2M801-012 | -02        | Z1            | 6-7                     | P        | A      |

Example Part Number

| 1. SERIES        |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| Part #           | Description                                                                     |
| <b>2M801-012</b> | Hermetic Receptacles with Printed Circuit Board Contacts or Solder cup contacts |

| 2. SHELL SIZE |                                          |
|---------------|------------------------------------------|
| Part #        | Description                              |
| <b>-02</b>    | Flange Mount                             |
| <b>-03</b>    | Weld Mount (only available is Z1 finish) |
| <b>-07</b>    | Jam Nut                                  |


| 3. SERVICE CLASS |           |                                                |      |
|------------------|-----------|------------------------------------------------|------|
| Material         | Part #    | Description                                    | RoHS |
| Stainless Steel  | <b>Z1</b> | Passivated                                     |      |
|                  | <b>ZL</b> | Electrolytic Nickel                            |      |
|                  | <b>ZB</b> | Stainless Steel with Olive Drab Cadmium Finish |      |

| 4. SHELL SIZE-INSERT ARRANGEMENT |
|----------------------------------|
| See Table pg 53-55               |

| 5. CONTACTS |                                           |
|-------------|-------------------------------------------|
| Part #      | Description                               |
| <b>P</b>    | Pin- Solder Cup                           |
| <b>C</b>    | Pin-PC Tail                               |
| <b>H</b>    | Pin, Solder Cup- Without Interfacial Seal |
| <b>Y</b>    | Pin, PC Tail- Without Interfacial Seal    |

| 6. KEYING         |      |      |
|-------------------|------|------|
| Part #            | A°   | B°   |
| <b>A (NORMAL)</b> | 150° | 210° |
| <b>B</b>          | 75°  | 210° |
| <b>C</b>          | 95°  | 230° |
| <b>D</b>          | 140° | 275° |
| <b>E</b>          | 75°  | 275° |
| <b>F</b>          | 95°  | 210° |


Note: Please contact the factory directly for a listing of tooled interfacial seals for the hermetically sealed connectors.




# 2M801 Hermetic

Hermetic Jam Nut Connector 2M801-012-07

38999 III  
38999 II  
38999 I  
SJT  
Aquacon  
2M801  
83723  
26482  
26500

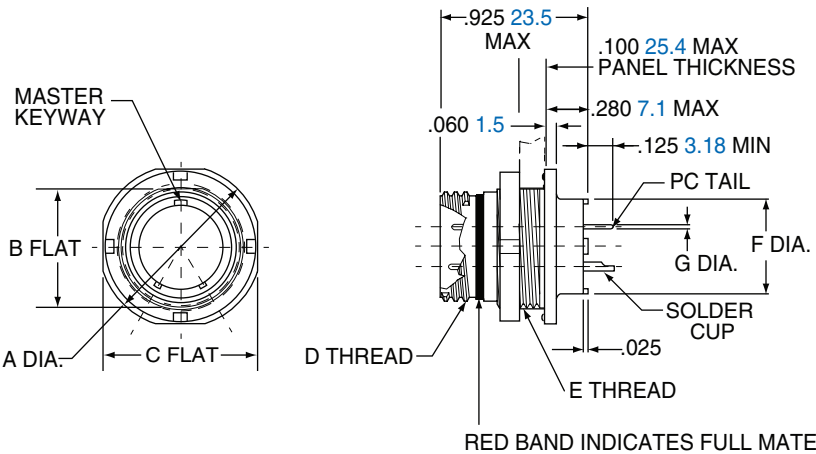


| Shell Size | A Dia. |       | B Flat |       | C Flat |       | D Thread          | UN-2A E Thread | F Dia. |       | G Dia. Tail Dia.       |
|------------|--------|-------|--------|-------|--------|-------|-------------------|----------------|--------|-------|------------------------|
|            | in.    | mm.   | in.    | mm.   | in.    | mm.   |                   |                | in.    | mm.   |                        |
| 5          | .575   | 14.61 | .350   | 8.89  | .545   | 13.84 | .3125-.05P-.1L-2A | .3750-28       | .244   | 6.20  | #23                    |
| 6          | .635   | 16.13 | .410   | 10.41 | .595   | 15.11 | .3750-.05P-.1L-2A | .4375-28       | .330   | 8.38  | .018/.022<br>0.46/0.56 |
| 7          | .755   | 19.18 | .536   | 13.61 | .723   | 18.36 | .4375-.05P-.1L-2A | .5625-32       | .432   | 10.97 | #20/20HD               |
| 8          | .755   | 19.18 | .536   | 13.61 | .723   | 18.36 | .5000-.05P-.1L-2A | .5625-32       | .493   | 12.52 | .024/.028<br>0.64/0.69 |
| 9          | .830   | 21.08 | .596   | 15.14 | .790   | 20.07 | .5625-.05P-.1L-2A | .6250-28       | .551   | 14.00 |                        |
| 10         | .890   | 22.61 | .658   | 16.71 | .855   | 21.72 | .6250-.05P-.1L-2A | .6875-28       | .620   | 15.75 | #16                    |
| 13         | 1.078  | 27.38 | .845   | 21.46 | 1.044  | 26.52 | .8125-.1P-.2L-2A  | .8750-28       | .703   | 17.86 | .060/.064<br>1.52/1.63 |
| 16         | 1.264  | 32.11 | 1.022  | 25.96 | 1.230  | 31.24 | 1.0000-.1P-.2L-2A | 1.0625-20      | .863   | 21.92 | #12                    |
| 17         | 1.325  | 33.66 | 1.096  | 27.84 | 1.290  | 32.77 | 1.0625-.1P-.2L-2A | 1.125-28       | .912   | 23.16 | .092/.096<br>2.34/2.44 |
| 21         | 1.625  | 41.28 | 1.345  | 34.16 | 1.577  | 40.06 | 1.3125-.1P-.2L-2A | 1.375-28       | 1.170  | 29.72 |                        |




| PANEL CUTOUT |           |            |           |            |
|--------------|-----------|------------|-----------|------------|
| Shell Size   | A Flat    |            | B Dia.    |            |
|              | in. ±.002 | mm. ± 0.05 | in. ±.002 | mm. ± 0.05 |
| 5            | .356      | 9.04       | .385      | 9.78       |
| 6            | .416      | 10.57      | .447      | 11.35      |
| 7            | .542      | 13.77      | .572      | 14.53      |
| 8            | .542      | 13.77      | .572      | 14.53      |
| 9            | .602      | 15.29      | .635      | 16.13      |
| 10           | .666      | 16.92      | .697      | 17.70      |
| 13           | .851      | 21.62      | .885      | 22.48      |
| 16           | 1.028     | 26.11      | 1.075     | 27.31      |
| 17           | 1.102     | 27.99      | 1.135     | 28.83      |
| 21           | 1.354     | 34.39      | 1.385     | 35.18      |

# 2M801 Dual-Start ACME Threads

Hermetic Square Flange Connector 2M801-012-02

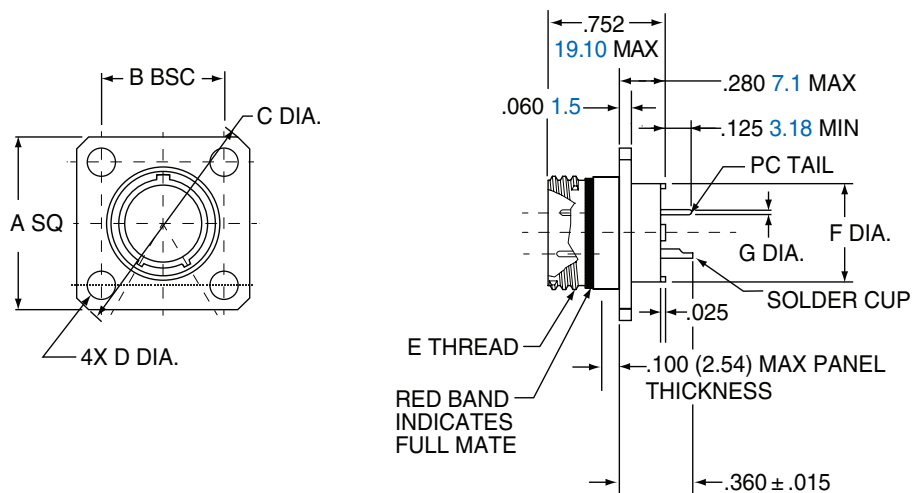



| Shell Size | A SQ. |       | B BSC |       | C Dia. |       | D Dia.    |            | E Thread          | F Dia. |       | G. Dia. Tail Dia.                  |
|------------|-------|-------|-------|-------|--------|-------|-----------|------------|-------------------|--------|-------|------------------------------------|
|            | in.   | mm.   | in.   | mm.   | in.    | mm.   | in. ±.003 | mm. ± 0.08 |                   | in.    | mm.   |                                    |
| 5          | .530  | 13.46 | .363  | 9.22  | .680   | 17.27 | .093      | 2.36       | .3125-.05P-.1L-2A | .244   | 6.20  | #23<br>.018/.022<br>0.46/0.56      |
| 6          | .590  | 14.99 | .423  | 10.74 | .750   | 19.05 | .093      | 2.36       | .3750-.05P-.1L-2A | .330   | 8.38  | #20/20HD<br>.025/.027<br>0.64/0.69 |
| 7          | .650  | 16.51 | .483  | 12.27 | .850   | 21.59 | .093      | 2.36       | .4375-.05P-.1L-2A | .432   | 10.97 | #16<br>.060/.064<br>1.52/1.63      |
| 8          | .712  | 18.08 | .545  | 13.84 | .938   | 23.83 | .093      | 2.36       | .5000-.05P-.1L-2A | .493   | 12.52 | #12<br>.092/.096<br>2.34/2.44      |
| 9          | .850  | 21.56 | .607  | 15.42 | 1.125  | 28.58 | .128      | 3.25       | .5625-.05P-.1L-2A | .551   | 14.00 |                                    |
| 10         | .890  | 22.61 | .670  | 17.02 | 1.188  | 30.18 | .128      | 3.25       | .6250-.05P-.1L-2A | .620   | 15.75 |                                    |
| 13         | 1.030 | 26.16 | .812  | 20.62 | 1.375  | 34.93 | .128      | 3.25       | .8125-.1P-.2L-2A  | .703   | 17.86 |                                    |
| 16         | 1.219 | 31.96 | .981  | 24.92 | 1.625  | 41.28 | .128      | 3.25       | 1.0000-.1P-.2L-2A | .863   | 21.92 |                                    |
| 17         | 1.280 | 32.51 | 1.060 | 26.92 | 1.700  | 43.18 | .128      | 3.25       | 1.0625-.1P-.2L-2A | .912   | 23.16 |                                    |
| 21         | 1.430 | 36.32 | 1.205 | 30.61 | 1.940  | 49.28 | .128      | 3.25       | 1.3125-.1P-.2L-2A | 1.170  | 29.72 |                                    |



| PANEL CUTOUT |        |       |       |       |        |      |
|--------------|--------|-------|-------|-------|--------|------|
| Shell Size   | A Dia. |       | B BSC |       | C Dia. |      |
|              | in.    | mm.   | in.   | mm.   | in.    | mm.  |
| 5            | .330   | 8.38  | .363  | 9.22  | .093   | 2.36 |
| 6            | .390   | 9.91  | .423  | 10.74 | .093   | 2.36 |
| 7            | .450   | 11.43 | .483  | 12.27 | .093   | 2.36 |
| 8            | .510   | 12.95 | .545  | 13.84 | .093   | 2.36 |
| 9            | .575   | 14.61 | .607  | 15.42 | .128   | 3.25 |
| 10           | .640   | 16.26 | .670  | 17.02 | .128   | 3.25 |
| 13           | .825   | 20.96 | .812  | 20.65 | .128   | 3.25 |
| 16           | 1.015  | 25.78 | .981  | 24.92 | .128   | 3.25 |
| 17           | 1.075  | 27.31 | 1.060 | 26.92 | .128   | 3.25 |
| 21           | 1.325  | 33.66 | 1.205 | 30.61 | .128   | 3.25 |

# 2M801 Dual-Start ACME Threads


Hermetic Weld Mount Connector 2M801-012-03

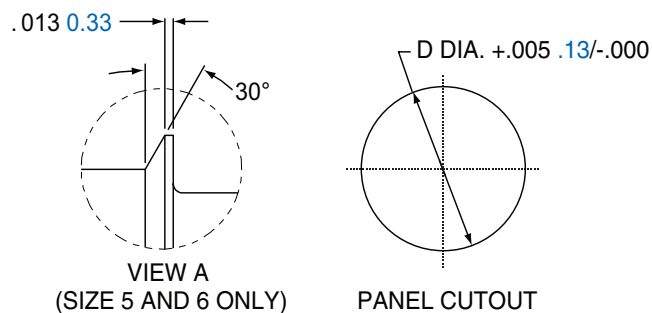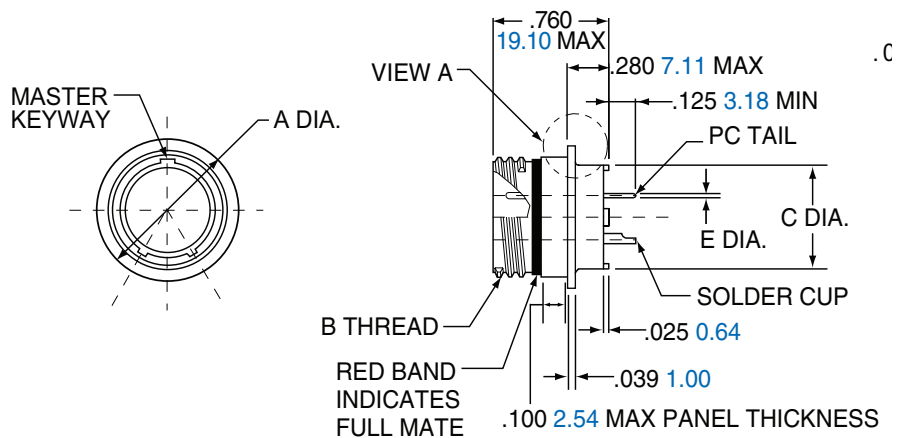

| Shell Size | A Dia |       | B Thread          | C Dia. |       | D Dia. Panel Cutout |       | G. PC Tail Dia.                           |
|------------|-------|-------|-------------------|--------|-------|---------------------|-------|-------------------------------------------|
|            | in.   | mm.   |                   | in.    | mm.   | in.                 | mm.   |                                           |
| 5          | .395  | 10.03 | .3125-.05P-.1L-2A | .244   | 6.20  | .319                | 8.10  | <b>#23</b><br>.018/.022<br>0.46/0.56      |
| 6          | .455  | 11.56 | .3750-.05P-.1L-2A | .330   | 8.38  | .379                | 9.55  | <b>#20/20HD</b><br>.024/.028<br>0.64/0.69 |
| 7          | .520  | 13.21 | .4375-.05P-.1L-2A | .432   | 11.97 | .438                | 11.13 | <b>#16</b><br>.060/.064<br>1.52/1.63      |
| 8          | .580  | 14.73 | .5000-.05P-.1L-2A | .493   | 12.52 | .502                | 11.13 | <b>#12</b><br>.092/.096<br>2.34/2.44      |
| 9          | .645  | 16.38 | .5625-.05P-.1L-2A | .551   | 14.00 | .563                | 14.30 |                                           |
| 10         | .705  | 18.01 | .6250-.05P-.1L-2A | .620   | 15.75 | .627                | 11.13 |                                           |
| 13         | .895  | 22.73 | .8125-.1P-.2L-2A  | .703   | 17.86 | .814                | 20.68 |                                           |
| 16         | 1.080 | 27.43 | 1.0000-.1P-.2L-2A | .863   | 21.92 | 1.007               | 25.58 |                                           |
| 17         | 1.145 | 29.08 | 1.0625-.1P-.2L-2A | .912   | 23.16 | 1.067               | 27.10 |                                           |
| 21         | 1.395 | 35.43 | 1.3125-.1P-.2L-2A | 1.170  | 29.72 | 1.320               | 33.53 |                                           |

# 83723

## Pyle



### FEATURES:

- **Hermetic**  
Hermetic styles are available in threaded receptacles with solderwell or flat eyelet termination. PC Tail Designs are available on request.
- **Environmental**  
Designed for environmental moisture sealing with fused compression glass sealed inserts
- **High Temperature Hermetics**  
200°C and 260°C Firewall

The Amphenol MIL-DTL-83723, Series III family of connectors includes styles from Pyle National. These have proven technology for severe environments and are widely used in commercial and military aerospace markets. Amphenol/Pyle 83723 connectors incorporate many advantageous features, such as a unique threaded coupling mechanism that provides greater resistance to decoupling. This coupling mechanism eliminates the need for safety wiring and tends to couple during vibration - thus offering the user added assurance and a margin of safety.

# MIL-DTL-83723, Series III, Pyle®

## Manufacturer's Specifications

The Amphenol/Pyle® Product line of MIL-DTL-83723\*, Series III Connectors was developed for the higher operating temperatures inherent in today's high performance aircraft and aircraft engines.

### THESE CONNECTORS MEET THE PERFORMANCE REQUIREMENTS OF THE FOLLOWING MANUFACTURER'S SPECIFICATIONS:


- European: ASD† EN2997
- Rolls Royce/SBAC: ESC10

| HERMETIC CONNECTOR PERFORMANCE CHARACTERISTICS |                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Thermal Shock                                  | No damage detrimental to the operation of the connector occurs when subjected to 10 cycles of thermal shock from 0°C to 90°C and back to 0°C.                                                                                                                                                             |
| Physical Shock (Mated)                         | 300 G's                                                                                                                                                                                                                                                                                                   |
| Moisture Resistance (Mated)                    | 500 Megohms                                                                                                                                                                                                                                                                                               |
| Insulation Resistance, High Temp. (Mated)      | 500 Megohms                                                                                                                                                                                                                                                                                               |
| Corrosion (Unmated)                            | Complies with MIL-DTL-83723 Req.                                                                                                                                                                                                                                                                          |
| Temperature Life                               | Fully functional for 1000 hours at 200°C (392°F) ambient. Internal temperature 238°C (460°F).                                                                                                                                                                                                             |
| Air Leakage (Unmated)                          | Less than .01 micron per cubic feet per hour on application of 15 PDS pressure differential across the connector.                                                                                                                                                                                         |
| Altitude Immersion (Mated)                     | After 3 cycles immersed in salt water with pressure reduced to 1 in. Hg (75,000 ft. altitude) for 30 minutes and returned to atmosphere pressure. While connectors submerged insulation resistance should remain 1000 megohms minimum and support 1500 volts RMS applied without flash-over or breakdown. |
| High Potential Voltage Altitude (Unmated)      | When tested in accordance with MIL-STD-202, Method 301, no flash-over or breakdown under simulated altitude conditions as shown:<br><b>Altitude/Service Rating I</b><br>50,000 ..... 500 AC-RMS<br>70,000 ..... 375 AC-RMS<br>110,000 ..... 200 AC-RMS                                                    |

\* BACC63CM supersedes BACC63BR and BACC63CN supersedes BACC63BT.

† ASD supersedes AECMA

### AMPHENOL AEROSPACE OFFERS THE PYLE® PRODUCT LINE OF MIL-DTL-83723\*, SERIES III CONNECTORS.

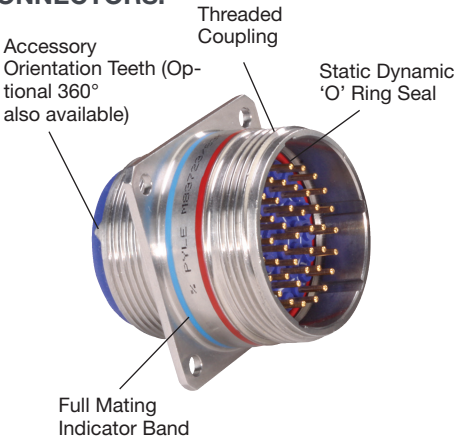

#### HERMETIC STYLE CONNECTORS

- Hermetic styles are available in threaded receptacles with solderwell or flat eyelet termination. PC Tail Designs are available on request.
- Designed for environmental moisture sealing with fused compression glass sealed inserts
- High temperature hermetics 200°C and 260°C Firewall

#### DESIGN FEATURES (THREADED STYLE SHOWN)

The Amphenol MIL-DTL-83723, Series III family of connectors includes styles from Pyle National. These have proven technology for severe environments and are widely used in commercial and military aerospace markets.

Amphenol/Pyle 83723 Series III high temperature styles are capable of operation at 260° C/500°F.

The Pyle 83723 family provides hermetic class that exceed the most stringent specification requirements.

#### SERVICE RATINGS

| Service Rating | Recommended Operating AC Voltage at Sea Level | Test Voltage AC (RMS), 60 cps |            |            |             |
|----------------|-----------------------------------------------|-------------------------------|------------|------------|-------------|
|                |                                               | Sea Level                     | 50,000 ft. | 70,000 ft. | 110,000 ft. |
| I              | 600                                           | 1,500                         | 500        | 375        | 200         |

Please note that the electrical data given is not an establishment of electrical safety factors. This is left entirely in the designer's hands as he can best determine which peak voltage, switching surges, transients, etc. can be expected in a particular circuit.



# MIL-DTL-83723, Series III, Pyle®

Hermetic Receptacles, cont. - Quick Reference


## MIL-DTL-83723, SERIES III HERMETIC SOLDER MOUNT/WELD MOUNT RECEPTACLE, THREADED COUPLING

| MILITARY          |                                               |
|-------------------|-----------------------------------------------|
| <b>M83723/90Y</b> | Stainless Steel, Class Y, Solderwell contacts |
| <b>M83723/90P</b> | Stainless Steel, Class P, Eyelet contacts     |

| COMMERCIAL                       |                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>BTY-14</b>                    | Stainless Steel, 'O' ring Seal, Solderwell or Eyelet contacts, 200°C or 260°C                                 |
| <b>BFY-14</b>                    | Stainless Steel, Static Dynamic Seal, Solderwell or Eyelet contacts, 200°C or 260°C                           |
| <b>BNY-14</b>                    | Stainless Steel, Static Dynamic Seal, Electro-deposited Nickel, Solderwell or Eyelet contacts, 200°C or 260°C |
| COMMERCIAL ASD                   |                                                                                                               |
| <b>EN2997YI/ YE1</b>             | Meets ASD Specifications, Stainless Steel, Class Y (200°C) / Class YE (260°C), Solderwell contacts            |
| COMMERCIAL ROLLS ROYCE STANDARDS |                                                                                                               |
| <b>ESC10YE1</b>                  | 260°C Firewall, Stainless Steel, Class YE, Solderwell contacts                                                |
| <b>ESC11YE1</b>                  | 260°C Firewall, Stainless Steel, Class YE, Solderwell contacts, Scoop-proof Recessed pins                     |
| PCB Tails available upon request |                                                                                                               |

## SERVICE CLASSES HERMETIC MILITARY AND COMMERCIAL

| HERMETIC  |                                                                                            |
|-----------|--------------------------------------------------------------------------------------------|
| <b>Y</b>  | Stainless steel, 200°C, hermetic with solderwell contacts                                  |
| <b>P</b>  | Stainless steel, 200°C, hermetic with eyelet contacts                                      |
| <b>YE</b> | Stainless steel, high temp. (260°C) firewall capability, hermetic with solderwell contacts |



**HERMETIC  
SOLDER MOUNT/WELD  
MOUNT RECEPTACLE,  
THREADED**

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

Commercial BTY, BFY and BNY meet European specifications and General Electric spec. GEM50TF3564, Classes A & B. Shell sizes 20, 24 and 28, consult Amphenol Aerospace for availability. Hermetic style receptacles are not included in Boeing designations.

# MIL-DTL-83723, Series III, Pyle®

## Hermetic Receptacles - Quick Reference

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500

### MIL-DTL-83723, SERIES III, HERMETIC SQUARE FLANGE RECEPTACLE, THREADED COUPLING

| MILITARY                         |                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>M83723/88Y</b>                | Stainless Steel, Class Y, Solderwell contacts                                                                 |
| <b>M83723/88P</b>                | Stainless Steel, Class P, Eyelet contacts                                                                     |
| COMMERCIAL                       |                                                                                                               |
| <b>BTY-17</b>                    | Stainless Steel, 'O' ring Seal, Solderwell or Eyelet contacts, 200°C or 260°C                                 |
| <b>BFY-17</b>                    | Stainless Steel, Static Dynamic Seal, Solderwell or Eyelet contacts, 200°C or 260°C                           |
| <b>BNY-17</b>                    | Stainless Steel, Static Dynamic Seal, Electro-deposited Nickel, Solderwell or Eyelet contacts, 200°C or 260°C |
| COMMERCIAL ASD                   |                                                                                                               |
| <b>EN2997Y0 / YE0</b>            | Meets ASD Specifications, Stainless Steel, Class Y (200°C) / Class YE (260°C), Solderwell contacts            |
| COMMERCIAL ROLLS ROYCE STANDARDS |                                                                                                               |
| <b>ESC10YE2</b>                  | 260°C Firewall, Stainless Steel, Class YE, Solderwell contacts                                                |
| <b>ESC10YE2</b>                  | 260°C Firewall, Stainless Steel, Class YE, Solderwell contacts, Scoop-proof Recessed pins                     |

PCB Tails available upon request

### MIL-DTL-83723, SERIES III, HERMETIC JAM NUT RECEPTACLE, THREADED COUPLING

| MILITARY                         |                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>M83723/89Y</b>                | Stainless Steel, Class Y, Solderwell contacts                                                                 |
| <b>M83723/89P</b>                | Stainless Steel, Class Y, Eyelet contacts                                                                     |
| COMMERCIAL                       |                                                                                                               |
| <b>BTY-19</b>                    | Stainless Steel, 'O' ring Seal, Solderwell or Eyelet contacts, 200°C or 260°C                                 |
| <b>BFY-19</b>                    | Stainless Steel, Static Dynamic Seal, Electro-deposited Nickel, Solderwell or Eyelet contacts, 200°C or 260°C |
| <b>BNY-19</b>                    | Stainless Steel, Static Dynamic Seal, Electro-deposited Nickel, Solderwell or Eyelet contacts, 200°C or 260°C |
| COMMERCIAL ASD                   |                                                                                                               |
| <b>EN2997Y7 / YE7</b>            | Meets ASD Specifications, Stainless Steel, Class Y (200°C) / Class YE (260°C), Solderwell contacts            |
| COMMERCIAL ROLLS ROYCE STANDARDS |                                                                                                               |
| <b>ESC10YE3</b>                  | 260°C Firewall, Stainless Steel, Class YE, Solderwell contacts                                                |
| <b>ESC11YE3</b>                  | 260°C Firewall, Stainless Steel, Class YE, Solderwell contacts, Scoop-proof Recessed pins                     |


PCB Tails available upon request

### SERVICE CLASSES HERMETIC MILITARY AND COMMERCIAL

| HERMETIC  |                                                                                            |
|-----------|--------------------------------------------------------------------------------------------|
| <b>Y</b>  | Stainless Steel, 200°C, hermetic with solderwell contacts                                  |
| <b>P</b>  | Stainless steel, 200°C, hermetic with eyelet contacts                                      |
| <b>YE</b> | Stainless steel, high temp. (260°C) firewall capability, hermetic with solderwell contacts |



**HERMETIC  
SQUARE FLANGE  
RECEPTACLE,  
THREADED**



**HERMETIC  
JAM NUT  
RECEPTACLE,  
THREADED**

Commercial BTY, BFY and BNY meet European specifications and General Electric spec. GEM50TF3564, Classes A & B.

Shell sizes 20, 24 and 28, consult Amphenol Aerospace for availability. Hermetic style receptacles are not included in Boeing designations.

# MIL-DTL-83723, Series III, Pyle®

Insert Availability and Identification,  
Alternate Keying Positions

## INSERT ARRANGEMENTS

| Shell Size/<br>Insert<br>Arrangement | Service<br>Rating | Total<br>Contacts | Contact Size |    |    |    |
|--------------------------------------|-------------------|-------------------|--------------|----|----|----|
|                                      |                   |                   | 8            | 12 | 16 | 20 |
| 08-03                                | I                 | 3                 |              |    |    | 3  |
| 08-98                                | I                 | 3                 |              |    |    | 3  |
| 10-02**                              | I                 | 2                 |              |    |    | 2  |
| 10-05                                | I                 | 5                 |              |    |    | 5  |
| 10-06                                | I                 | 6                 |              |    |    | 6  |
| 10-20                                | I                 | 2                 |              |    | 2  |    |
| 12-03***                             | I                 | 3                 |              |    | 3  |    |
| 12-12                                | I                 | 12                |              |    |    | 12 |
| 14-04***                             | I                 | 4                 |              | 4  |    |    |
| 14-07***                             | I                 | 7                 |              |    | 7  |    |
| 14-12                                | I                 | 12                |              |    | 3  | 9  |
| 14-15                                | I                 | 15                |              |    |    | 15 |
| 16-10***                             | I                 | 10                |              |    | 10 |    |
| 16-24                                | I                 | 24                |              |    |    | 24 |
| 18-08                                | I                 | 8                 |              | 8  |    |    |
| 18-14***                             | I                 | 14                |              |    | 14 |    |
| 18-31                                | I                 | 31                |              |    |    | 31 |

† Not an MS layout.


\* Special - consult Amphenol for availability.

\*\* Special Pyle with Matrix 83723 insert (ESC10 type, EN2997 Spec); consult Amphenol Aerospace for availability. Size 8 and Size 12 cavities can accommodate Twinax or Coax contacts; consult Amphenol for information. Sizes 20, 24 and 28 Hermetic; consult Amphenol Aerospace for availability.

## ALTERNATE KEYING POSITIONS (ROTATION OF KEY/KEYWAY OF SHELL)

To avoid cross-plugging problems in applications requiring the use of more than one connector of the same size and arrangement, alternate keying positions are available as indicated in the chart below. The diagram shows the engaging view of a receptacle shell with keyways. The insert is rotated counter-clockwise relative to the center-line. Plug shells would be the opposite of this diagram.

In the "Normal insert position" (position N), the insert center line coincides with the center-line of the master key/keyway of the shell. In the "alternate keying positions" (positions 6, 7, 8, 9 and Y), the minor keys/keyways are positioned with reference to master key/keyway as indicated in the keying position table.

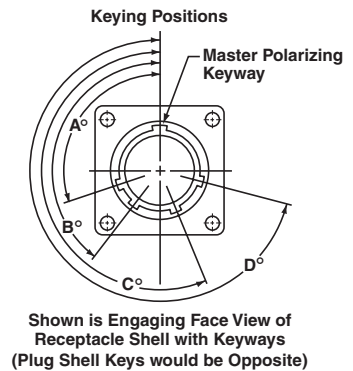

## ALTERNATE KEYING POSITIONS OF SHELL

| Shell Size                        | Polarizing Position | Key/Keyway Positions |     |     |     |
|-----------------------------------|---------------------|----------------------|-----|-----|-----|
|                                   |                     | A°                   | B°  | C°  | D°  |
| 8 thru 24                         | N                   | 105                  | 140 | 215 | 265 |
|                                   | 6                   | 102                  | 132 | 248 | 320 |
|                                   | 7                   | 80                   | 118 | 230 | 312 |
|                                   | 8                   | 35                   | 140 | 205 | 275 |
|                                   | 9                   | 64                   | 155 | 234 | 304 |
| 10 only                           | Y††                 | 25                   | 115 | 220 | 270 |
| 12, 14, 16, 18, 20, 22, 24 and 28 | 6                   | 18                   | 149 | 192 | 259 |
|                                   | 7                   | 92                   | 152 | 222 | 342 |
|                                   | 8                   | 84                   | 152 | 204 | 334 |
|                                   | 9                   | 24                   | 135 | 199 | 240 |
|                                   | Y††                 | 98                   | 152 | 268 | 338 |

## ESC 11 (HTK SERIES) ONLY

| Shell Size | Polarizing Position | Key/Keyway Positions |     |     |     |
|------------|---------------------|----------------------|-----|-----|-----|
|            |                     | A°                   | B°  | C°  | D°  |
| 14 thru 24 | N                   | 95                   | 145 | 220 | 255 |
|            | 6                   | 101                  | 168 | 211 | 342 |
|            | 7                   | 18                   | 138 | 208 | 268 |
|            | 8                   | 26                   | 156 | 208 | 276 |
|            | 9                   | 120                  | 161 | 225 | 336 |

†† Position Y supersedes inactive positions 10 and Z designations. Ref. MIL-STD-1554.

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723


26482

26500


# MIL-DTL-83723, Series III, Pyle®

## Insert Arrangements


Front face of pin insert or rear face of socket insert illustrated



| Insert Arrangement | 08-03 | 08-98 | 10-02** | 10-05 | 10-06 | 10-20 | 12-03*** | 12-12 |
|--------------------|-------|-------|---------|-------|-------|-------|----------|-------|
| Service Rating     | I     | I     | I       | I     | I     | I     | I        | I     |
| Number of Contacts | 3     | 3     | 2       | 5     | 6     | 2     | 3        | 12    |
| Contact Size       | 20    | 20    | 20      | 20    | 20    | 16    | 16       | 20    |

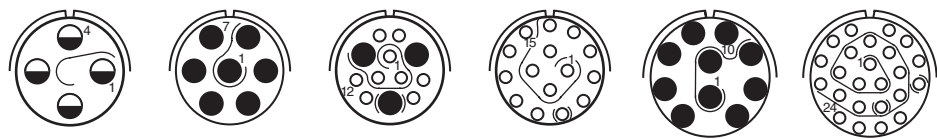

| Insert Arrangement | 14-04*** | 14-07*** | 14-12** | 14-15 | 16-10*** | 16-24 |
|--------------------|----------|----------|---------|-------|----------|-------|
| Service Rating     | I        | I        | I       | I     | I        | I     |
| Number of Contacts | 4        | 7        | 9       | 3     | 15       | 24    |
| Contact Size       | 12       | 16       | 20      | 16    | 20       | 20    |

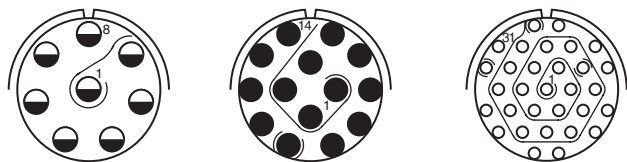

| Insert Arrangement | 18-08 | 18-14*** | 18-31 |
|--------------------|-------|----------|-------|
| Service Rating     | I     | I        | I     |
| Number of Contacts | 8     | 14       | 31    |
| Contact Size       | 12    | 16       | 20    |

†Not an MS layout.  
\*Special - consult Amphenol Aerospace for availability.  
\*\* Special Pyle with Matrix 83723 insert (ESC10 type, EN2997 Spec); consult Amphenol Aerospace for availability.  
Size 8 and Size 12 cavities can accommodate Twinax or Coax contacts; consult Amphenol Aerospace for information.  
Sizes 20, 24 and 28 Hermetic; consult Amphenol Aerospace for availability.



## How to Order – Hermetic, Military or Pyle Commercial

### MILITARY HERMETIC

| 1.<br>Connector Type | 2.<br>Connector Style and Contact Type (Crimp) | 3.<br>Service Class | 4.<br>Shell Size/ Insert Arrangement | 5.<br>Alternate Keying Position of Shell |
|----------------------|------------------------------------------------|---------------------|--------------------------------------|------------------------------------------|
| <b>M83723</b>        | <b>/88</b>                                     | <b>Y</b>            | <b>16-24</b>                         | <b>6</b>                                 |

### COMMERCIAL HERMETIC

| 1.<br>Connector Style | 2.<br>Shell Style | 3.<br>Shell Size/ Insert Arrangement | 4.<br>Contact Type | 5.<br>Contact Style | 6.<br>Alternate Contact Finish | 7.<br>Alternate Keying Position of Shell | 8.<br>Variations |
|-----------------------|-------------------|--------------------------------------|--------------------|---------------------|--------------------------------|------------------------------------------|------------------|
| <b>BTY</b>            | <b>-17</b>        | <b>16-24</b>                         | <b>P</b>           | <b>1</b>            | <b>D</b>                       | <b>06</b>                                | <b>XXXX</b>      |

#### 1. MILITARY CONNECTOR TYPE

|               |                                                |
|---------------|------------------------------------------------|
| <b>M83723</b> | Designates MIL-DTL-83723 Series III Connectors |
|---------------|------------------------------------------------|

#### 2. MILITARY HERMETIC CONNECTOR STYLE

|            |                                                      |
|------------|------------------------------------------------------|
| <b>/88</b> | Hermetic, Threaded Square Flange Receptacle          |
| <b>/89</b> | Hermetic, Threaded Jam Nut (D-Hole Mount) Receptacle |
| <b>/90</b> | Hermetic, Threaded Solder Mounted Receptacle         |

#### 3. SERVICE CLASS

|          |                                                            |
|----------|------------------------------------------------------------|
| <b>Y</b> | Hermetic, Stainless Steel, 200°C, with Solderwell Contacts |
| <b>H</b> | Hermetic, Tin Plated Carbon Steel, 150° C                  |

For availability of a Plated Steel Shell, consult Amphenol Aerospace.

#### 4. SHELL SIZE & INSERT ARRANGEMENT

|                |                                                                             |
|----------------|-----------------------------------------------------------------------------|
| <b>Page 78</b> | First number represents Shell Size, second number is the Insert Arrangement |
|----------------|-----------------------------------------------------------------------------|

#### 5. ALTERNATE KEYING POSITION - ROTATION

|                |                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------|
| <b>Page 77</b> | Use N for normal. Use 6, 7, 8, 9 or Y for alternate keying positions. See page 77 for descriptions. |
|----------------|-----------------------------------------------------------------------------------------------------|

#### 1. COMMERCIAL HERMETIC CONNECTOR STYLE

|            |                                                                                                |
|------------|------------------------------------------------------------------------------------------------|
| <b>BTY</b> | Hermetic, Threaded, Stainless Steel, with 'O' ring seal                                        |
| <b>BFY</b> | Hermetic, Threaded, Stainless Steel, Static/Dynamic Seal                                       |
| <b>BNY</b> | Hermetic, Threaded, Stainless Steel, Electro-deposited Nickel plated, with Static/Dynamic Seal |

#### 2. SHELL STYLE

|            |                                   |
|------------|-----------------------------------|
| <b>-17</b> | Square Flange Receptacle          |
| <b>-19</b> | Jam Nut (D-Hole Mount) Receptacle |
| <b>-14</b> | Solder Mounted Receptacle         |

#### 3. SHELL SIZE & INSERT ARRANGEMENT

|                |                                                                             |
|----------------|-----------------------------------------------------------------------------|
| <b>Page 78</b> | First number represents Shell Size, second number is the Insert Arrangement |
|----------------|-----------------------------------------------------------------------------|

#### 4. CONTACT TYPE

|          |              |
|----------|--------------|
| <b>P</b> | Pin Contacts |
|----------|--------------|

#### 5. CONTACT STYLE

|          |                                     |
|----------|-------------------------------------|
| <b>1</b> | Solderwell Contacts (Mil-Spec Type) |
| <b>4</b> | Eyelet Contacts                     |

#### 6. ALTERNATE CONTACT FINISH

|          |                                       |
|----------|---------------------------------------|
| <b>D</b> | .000050 (per MIL-DTL-83723, III) Gold |
| <b>V</b> | .000100 Gold                          |

#### 7. ALTERNATE KEYING POSITION - ROTATION

|                |                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------|
| <b>Page 77</b> | Use N for normal. Use 6, 7, 8, 9 or Y for alternate keying positions. See page 77 for descriptions. |
|----------------|-----------------------------------------------------------------------------------------------------|

#### 8. VARIATIONS

|             |                                              |
|-------------|----------------------------------------------|
| <b>Y144</b> | 260°C Capability (Euro Market)               |
| <b>Y163</b> | 200°C Capability (Euro Market)               |
| <b>Y186</b> | 260°C Capability per G.E. M50TF3564, Class B |
| <b>Y188</b> | 200°C Capability per G.E. M50TF3564, Class A |

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723

26482

26500


# Hermetic Square Flange Mount Receptacle, Threaded Coupling

Military (MS83723/88), Commercial (BTY, BFY, BNY)

QUICK REFERENCE Page 75-76  
PART NUMBER BUILDER Page 79

**MILITARY**  
M83723/88Y  
M83723/88P

**COMMERCIAL**  
BTY/BFY/BNY-17  
EN2997Y0 / YE0  
ESC10YE2  
ESC11YE2

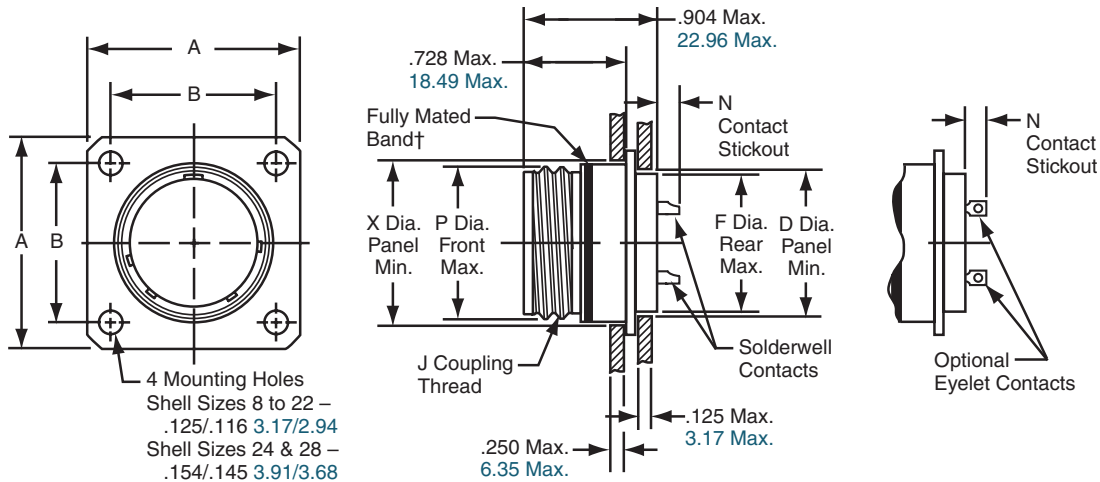

† When fully mated with plug, this band will be covered.  
(Band is red on military types; can be red or blue on commercial types).

Inches

| Shell Size | A<br>±.010 | B<br>±.005 | D Dia.<br>Panel Min. | F Dia.<br>Rear Max. | J<br>Coupling Thread<br>Class 2A | N<br>Contact Stickout |                             | P Dia.<br>Front Max. | X Dia.<br>Panel Min. |
|------------|------------|------------|----------------------|---------------------|----------------------------------|-----------------------|-----------------------------|----------------------|----------------------|
|            |            |            |                      |                     |                                  | Size 20<br>Contacts   | Size 12 &<br>16<br>Contacts |                      |                      |
| 8          | .812       | .594       | .510                 | .500                | .5625-24 UNF                     | .194 / .134           | .224 / .164                 | .562                 | .572                 |
| 10         | .937       | .719       | .635                 | .625                | .6875-24 UNEF                    | .194 / .134           | .224 / .164                 | .696                 | .706                 |
| 12         | 1.031      | .812       | .760                 | .750                | .8750-20 UNEF                    | .194 / .134           | .224 / .164                 | .875                 | .885                 |
| 14         | 1.125      | .906       | .885                 | .875                | .9375-20 UNEF                    | .194 / .134           | .224 / .164                 | .936                 | .946                 |
| 16         | 1.250      | .969       | 1.010                | 1.000               | 1.0625-18 UNEF                   | .194 / .134           | .224 / .164                 | 1.062                | 1.072                |
| 18         | 1.343      | 1.062      | 1.072                | 1.062               | 1.1875-18 UNEF                   | .194 / .134           | .224 / .164                 | 1.187                | 1.197                |
| 22         | 1.562      | 1.250      | 1.322                | 1.312               | 1.4375-18 UNEF                   | .194 / .134           | .224 / .164                 | 1.437                | 1.447                |

Millimeters

| Shell Size | A<br>±.25 | B<br>±.13 | D Dia.<br>Panel Min. | F Dia.<br>Rear Max. | P Dia.<br>Front Max. | X Dia.<br>Panel Min. |
|------------|-----------|-----------|----------------------|---------------------|----------------------|----------------------|
| 8          | 20.62     | 15.09     | 12.95                | 12.70               | 14.27                | 15.75                |
| 10         | 23.80     | 18.26     | 16.13                | 15.88               | 17.68                | 18.99                |
| 12         | 26.19     | 20.62     | 19.30                | 19.05               | 22.23                | 23.19                |
| 14         | 28.58     | 23.01     | 22.48                | 22.23               | 23.77                | 24.89                |
| 16         | 31.75     | 24.61     | 25.65                | 25.40               | 26.97                | 28.12                |
| 18         | 34.11     | 26.97     | 27.23                | 26.97               | 30.15                | 30.71                |
| 22         | 39.67     | 31.75     | 33.58                | 33.32               | 36.50                | 36.88                |

Commercial hermetics meet some European and GE specifications. Hermetic styles are threaded coupling only. Shell sizes 20, 24 and 28, consult Amphenol for availability. All dimensions for reference only.


# Hermetic Jam Nut (D-Hole Mount) Receptacle, Threaded Coupling

Military (MS83723/89), Commercial (BTY, BFY, BNY)

**QUICK REFERENCE** Page 75-76  
**PART NUMBER BUILDER** Page 79

**MILITARY**  
**M83723/89Y**  
**M83723/89P**

**COMMERCIAL**  
**BTY, BFY, BNY-19**  
**EN2997Y7, YE7**  
**ESC10YE3**  
**ESC11YE3**

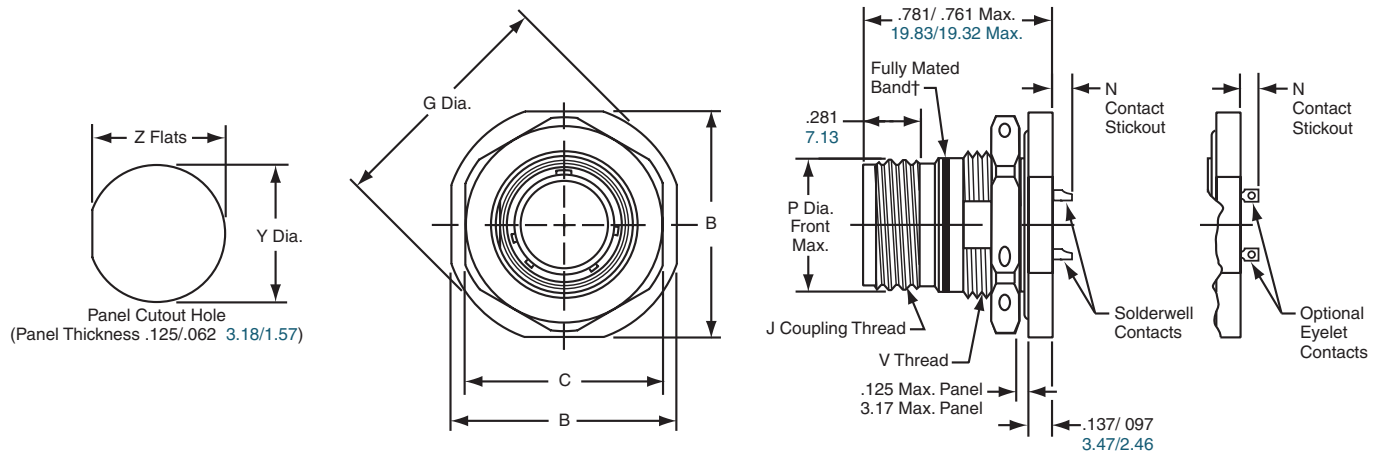

† When fully mated with plug, this band will be covered.  
(Band is red on military types; can be red or blue on commercial types).

Inches

| Shell Size | B Flats Max. | C Hex Max. | G Dia. Max. | J Coupling Thread Class 2A | N Contact Stickout |                       | P Dia. Front Max. | V Thread Class 2A | Y Dia. ±.005 | Z Flats ±.005 |
|------------|--------------|------------|-------------|----------------------------|--------------------|-----------------------|-------------------|-------------------|--------------|---------------|
|            |              |            |             |                            | Size 20 Contacts   | Size 12 & 16 Contacts |                   |                   |              |               |
| 8          | .980         | .828       | 1.068       | .5625-24 UNF               | .180 / .120        | .210 / .150           | .562              | .6250-20 UNF      | .635         | .605          |
| 10         | 1.104        | .953       | 1.192       | .6875-24 UNEF              | .180 / .120        | .210 / .150           | .696              | .7500-20 UNEF     | .760         | .730          |
| 12         | 1.291        | 1.140      | 1.380       | .8750-20 UNEF              | .180 / .120        | .210 / .150           | .875              | .9380-20 UNEF     | .947         | .917          |
| 14         | 1.391        | 1.205      | 1.505       | .9375-20 UNEF              | .180 / .120        | .210 / .150           | .936              | 1.0000-20 UNEF    | 1.010        | .980          |
| 16         | 1.516        | 1.329      | 1.630       | 1.0625-18 UNEF             | .180 / .120        | .210 / .150           | 1.062             | 1.1250-18 UNEF    | 1.135        | 1.105         |
| 18         | 1.641        | 1.455      | 1.756       | 1.1875-18 UNEF             | .180 / .120        | .210 / .150           | 1.187             | 1.2500-18 UNEF    | 1.260        | 1.225         |
| 22         | 1.954        | 1.705      | 2.068       | 1.4375-18 UNEF             | .180 / .120        | .210 / .150           | 1.437             | 1.5000-18 UNEF    | 1.510        | 1.475         |

Millimeters

| Shell Size | B Flats Max. | C Hex Max. | G Dia. Max. | N Contact Stickout |                       | P Dia. Front Max. | Y Dia. ±.13 | Z Flats ±.13 |
|------------|--------------|------------|-------------|--------------------|-----------------------|-------------------|-------------|--------------|
|            |              |            |             | Size 20 Contacts   | Size 12 & 16 Contacts |                   |             |              |
| 8          | 24.89        | 21.03      | 27.13       | 4.57 / 3.05        | 5.33 / 3.81           | 14.27             | 16.13       | 15.37        |
| 10         | 28.04        | 24.21      | 30.28       | 4.57 / 3.05        | 5.33 / 3.81           | 17.68             | 19.30       | 18.54        |
| 12         | 32.79        | 28.96      | 35.05       | 4.57 / 3.05        | 5.33 / 3.81           | 22.23             | 24.05       | 23.29        |
| 14         | 35.33        | 30.61      | 38.23       | 4.57 / 3.05        | 5.33 / 3.81           | 23.77             | 25.65       | 24.89        |
| 16         | 38.51        | 33.76      | 41.40       | 4.57 / 3.05        | 5.33 / 3.81           | 26.97             | 28.83       | 28.07        |
| 18         | 41.68        | 36.96      | 44.60       | 4.57 / 3.05        | 5.33 / 3.81           | 30.15             | 32.00       | 31.12        |
| 22         | 49.63        | 43.31      | 52.53       | 4.57 / 3.05        | 5.33 / 3.81           | 36.47             | 38.35       | 37.47        |

Commercial hermetics meet some European and GE specifications. Hermetic styles are threaded coupling only.

Shell sizes 20, 24 and 28, consult Amphenol for availability. All dimensions for reference only.



# Hermetic Solder/Weld Mount Receptacle, Threaded Coupling


Military (M83723/90), Commercial (BTY, BFY, BNY)

**QUICK REFERENCE** Page 75-76  
**PART NUMBER BUILDER** Page 79

**MILITARY**  
M83723/90Y  
M83723/90P

**COMMERCIAL**  
BTY/BFY/BNY-14  
EN2997Y1 / YE1  
ESC10YE1  
ESC11YE1

Hermetically sealed receptacles have fused compression glass sealed inserts which provide environmental moisture sealing. There are three hermetic styles within the PT bayonet series.

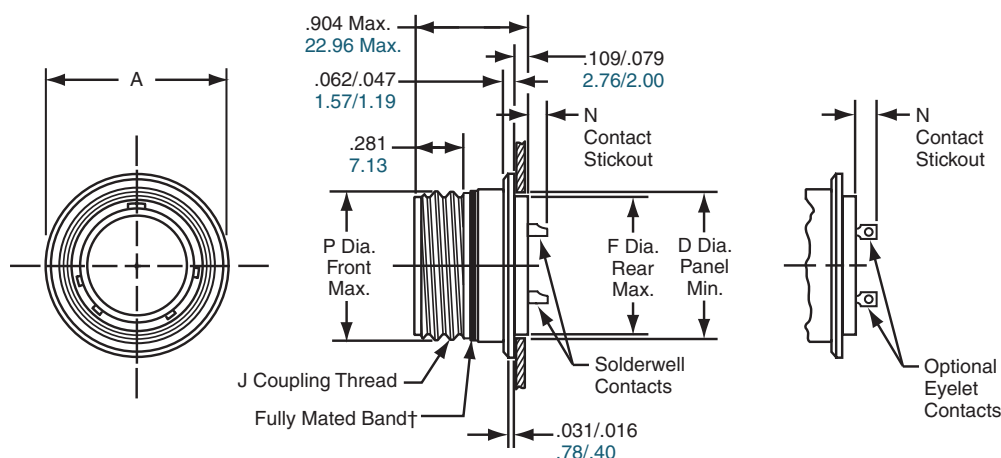

† When fully mated with plug this band will be covered.  
(Band is red on military types; can be red or blue on commercial types).

Inches

| Shell Size | A Dia. ±.010 | D Dia. Panel Min. | F Dia. Rear Max. | J Coupling Thread Class 2A | N Contact Stickout |                       | P Dia. Front Max. |
|------------|--------------|-------------------|------------------|----------------------------|--------------------|-----------------------|-------------------|
|            |              |                   |                  |                            | Size 20 Contacts   | Size 12 & 16 Contacts |                   |
| 8          | .713         | .510              | .500             | .5625-24 UNF               | .194 / .134        | .224 / .164           | .562              |
| 10         | .840         | .572              | .562             | .6875-24 UNEF              | .194 / .134        | .224 / .164           | .696              |
| 12         | 1.045        | .760              | .750             | .8750-20 UNEF              | .194 / .134        | .224 / .164           | .875              |
| 14         | 1.090        | .822              | .812             | .9375-20 UNEF              | .194 / .134        | .224 / .164           | .936              |
| 16         | 1.210        | .947              | .937             | 1.0625-18 UNEF             | .194 / .134        | .224 / .164           | 1.062             |
| 18         | 1.340        | 1.072             | 1.062            | 1.1875-18 UNEF             | .194 / .134        | .224 / .164           | 1.187             |
| 22         | 1.562        | 1.322             | 1.312            | 1.4375-18 UNEF             | .194 / .134        | .224 / .164           | 1.437             |

Millimeters

| Shell Size | A Dia. ±.25 | D Dia. Panel Min. | F Dia. Rear Max. | P Dia. Front Max. |
|------------|-------------|-------------------|------------------|-------------------|
| 8          | 18.11       | 12.95             | 12.70            | 14.27             |
| 10         | 21.34       | 14.53             | 14.27            | 17.68             |
| 12         | 26.54       | 19.30             | 19.05            | 22.23             |
| 14         | 27.69       | 20.88             | 20.62            | 23.77             |
| 16         | 30.73       | 24.05             | 23.80            | 26.97             |
| 18         | 34.04       | 27.23             | 26.97            | 30.15             |
| 22         | 39.67       | 33.58             | 33.32            | 36.50             |

Commercial hermetics meet some European and GE specifications. Hermetic styles are threaded coupling only.

Shell sizes 20, 24 and 28, consult Amphenol for availability. All dimensions for reference only.



# 26482

## Series I

Amphenol® Miniature Circular connectors offer twice the number of contacts in just half the size of a standard connector. These miniature connectors, are available in several series, each with varying design characteristics and customer options to meet cost considerations and provide maximum design flexibility.

### FEATURES:

- All styles are for general duty applications and environmental sealing is achieved with the grommet and clamp design.
- Operating temperature is from -55°C to +125°;  
Operating voltage to 1000 VAC (RMS) at sea level.

Hermetically sealed receptacles have fused compression glass sealed inserts which provide environmental moisture sealing. There are three hermetic styles within the PT bayonet series.

# Hermetic MIL-DTL-26482, Series I

## Insert Availability Chart

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723


26482

26500


| Insert Arrangement | Hermetic PT<br>MS-PT PC | Total<br>Contacts | 20 | 16 | 12 | Service<br>Rating |
|--------------------|-------------------------|-------------------|----|----|----|-------------------|
| 6-1                | X                       | 1                 | 1  |    |    | I                 |
| 8-2                | X                       | 2                 | 2  |    |    | I                 |
| 8-3                | X                       | 3                 | 3  |    |    | I                 |
| 8-4                | X                       | 4                 | 4  |    |    | I                 |
| 8-33               | X                       | 3                 | 3  |    |    | I                 |
| 10-5               | X                       | 5                 | 5  |    |    | I                 |
| 10-6               | X                       | 6                 | 6  |    |    | I                 |
| 10-98              | X                       | 6                 | 6  |    |    | I                 |
| 12-3               | X                       | 55                | 55 |    |    | I                 |
| 12-4               | X                       | 61                | 61 |    |    | I                 |
| 12-8               | X                       | 32                | 32 |    |    | I                 |
| 12-10              | X                       | 10                | 10 |    |    | I                 |
| 14-4               | X                       | 4                 |    |    | 4  | I                 |
| 14-5               | X                       | 41                |    |    |    | I                 |
| 14-12              | X                       | 21                |    | 21 | 21 | II                |
| 14-15              | X                       | 41                | 27 | 14 | 14 | I                 |
| 14-18              | X                       | 55                | 55 |    |    | I                 |
| 14-19              | X                       | 61                | 61 |    |    | I                 |
| 14-AA              | X                       | 55                | 55 |    |    | I                 |
| 16-8               | X                       | 55                | 55 |    |    | I                 |
| 16-26              | X                       | 55                | 55 |    |    | I                 |
| 18-11              | X                       | 55                | 55 |    |    | I                 |
| 18-30              | X                       | 55                | 55 |    |    | I                 |
| 18-32              | X                       | 32                | 32 |    |    | I                 |
| 20-16              | X                       | 16                |    | 16 | 16 | II                |
| 20-39              | X                       | 39                | 37 | 2  | 2  | I                 |
| 20-41              | X                       | 41                | 41 |    |    | I                 |
| 22-21              | X                       | 21                |    | 21 | 21 | II                |
| 22-41              | X                       | 41                | 27 | 14 | 14 | I                 |
| 22-55              | X                       | 55                | 55 |    |    | I                 |
| 24-61              | X                       | 61                | 61 |    |    | I                 |

# Hermetic MIL-DTL-26482, Series I


## Insert Arrangements




| Insert Arrangement | 6-1 | 8-2 | 8-3 | 8-4 | 8-33 | 10-5 | 10-6 | 10-98 | 12-3 |
|--------------------|-----|-----|-----|-----|------|------|------|-------|------|
| Service Rating     | I   | I   | I   | I   | I    | I    | I    | I     | II   |
| Number of Contacts | 1   | 2   | 3   | 4   | 3    | 5    | 6    | 6     | 3    |
| Contact Size       | 20  | 20  | 20  | 20  | 20   | 20   | 20   | 20    | 16   |




| Insert Arrangement | 12-4 | 12-8 | 12-10 | 14-4 | 14-5 | 14-12 |    | 14-15 |    | 14-18 |
|--------------------|------|------|-------|------|------|-------|----|-------|----|-------|
| Service Rating     | I    | I    | I     | I    | II   | I     |    | I     |    | I     |
| Number of Contacts | 4    | 8    | 10    | 4    | 5    | 8     | 4  | 14    | 1  | 18    |
| Contact Size       | 16   | 20   | 20    | 12   | 16   | 20    | 16 | 20    | 16 | 20    |

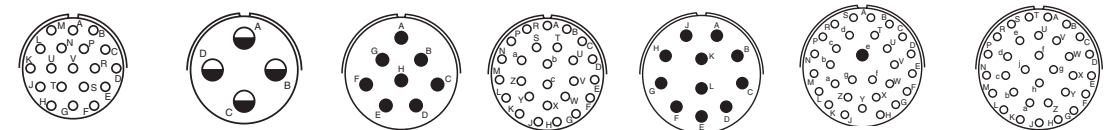

| Insert Arrangement | 14-19 | 14-AA | 16-8 | 16-26 | 18-11 | 18-30 |    | 18-32 |
|--------------------|-------|-------|------|-------|-------|-------|----|-------|
| Service Rating     | I     | I     | II   | I     | II    | I     |    | I     |
| Number of Contacts | 19    | 4     | 8    | 26    | 11    | 29    | 1  | 32    |
| Contact Size       | 20    | 12    | 16   | 20    | 16    | 20    | 16 | 20    |

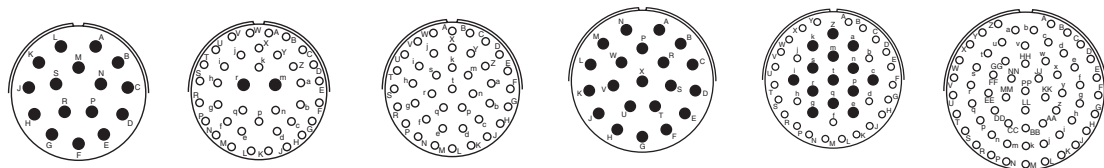

| Insert Arrangement | 20-16 | 20-39 |    | 20-41 | 22-21 | 22-41 |    | 24-61 |
|--------------------|-------|-------|----|-------|-------|-------|----|-------|
| Service Rating     | II    | I     |    | I     | II    | I     |    | I     |
| Number of Contacts | 16    | 37    | 2  | 41    | 21    | 27    | 14 | 61    |
| Contact Size       | 16    | 20    | 16 | 20    | 16    | 20    | 16 | 20    |



# Hermetic MIL-DTL-26482, Series I

## Alternate Positioning

### ALTERNATE POSITIONING

To avoid cross-plugging problems in applications requiring the use of more than one miniature circular connector of the same size and arrangement, alternate insert rotations are available as indicated in the accompanying chart. As shown in the diagram, the front face of the pin insert is rotated within the shell in a clockwise direction from the normal shell key. The socket insert would be rotated counterclockwise the same number of degrees in respect to the normal shell key.

### KEYWAY ROTATION

| Shell Size | Insert Arrangement | Insert Rotation |     |     |     |
|------------|--------------------|-----------------|-----|-----|-----|
|            |                    | W               | X   | Y   | Z   |
| 6          | 6-1                | -               | -   | -   | -   |
| 8          | 8-2*               | 86              | 72  | 128 | 114 |
| 8          | 8-3                | 80              | 68  | 132 | 120 |
| 8          | 8-4*               | 79              | 66  | 134 | 121 |
| 8          | 8-33*              | 82              | 70  | 130 | 118 |
| 10         | 10-5*              | 85              | 74  | 126 | 115 |
| 10         | 10-6*              | 90              | -   | -   | -   |
| 10         | 10-98*             | 90              | 180 | 240 | 270 |
| 12         | 12-3               | -               | -   | 180 | -   |
| 12         | 12-4*              | 38              | -   | -   | -   |
| 12         | 12-8               | 90              | 112 | 203 | 292 |
| 12         | 12-10*             | 60              | 155 | 270 | 295 |
| 14         | 14-4*              | 45              | -   | -   | -   |
| 14         | 14-5               | 40              | 92  | 184 | 273 |
| 14         | 14-12              | 43              | 90  | -   | -   |
| 14         | 14-15              | 17              | 110 | 155 | 234 |
| 14         | 14-18              | 15              | 90  | 180 | 270 |
| 14         | 14-19              | 30              | 165 | 315 | -   |
| 14         | 14-AA              | 45              | -   | -   | -   |
| 16         | 16-8               | 54              | 152 | 180 | 331 |
| 16         | 16-26              | 60              | -   | 275 | 338 |
| 18         | 18-11              | 62              | 119 | 241 | 340 |
| 18         | 18-30              | 180             | 193 | 285 | 350 |
| 18         | 18-32              | 85              | 138 | 222 | 265 |
| 20         | 20-16              | 238             | 318 | 333 | 347 |
| 20         | 20-39              | 63              | 144 | 252 | 333 |
| 20         | 20-41              | 45              | 126 | 225 | -   |
| 22         | 22-21              | 16              | 135 | 175 | 349 |
| 22         | 22-41              | 39              | 135 | 264 | -   |
| 22         | 22-55              | 30              | 142 | 226 | 314 |
| 24         | 24-61              | 90              | 180 | 270 | 324 |

# Hermetic MIL-DTL-26482, Series I

## How to Order

### COMMERCIAL HERMETIC

| 1.              | 2.          | 3.            | 4.                             | 5.           | 6.                                 |
|-----------------|-------------|---------------|--------------------------------|--------------|------------------------------------|
| Connector Style | Shell Style | Service Class | Shell Size/ Insert Arrangement | Contact Type | Alternate Keying Position of Shell |
| <b>PT</b>       | <b>02</b>   | <b>H</b>      | <b>6-1</b>                     | <b>P</b>     | <b>06</b>                          |

### MILITARY HERMETIC

| 1.             | 2.              | 3.          | 4.            | 5.                             | 6.           | 7.                                 |
|----------------|-----------------|-------------|---------------|--------------------------------|--------------|------------------------------------|
| Connector Type | Specific Number | Shell Style | Service Class | Shell Size/ Insert Arrangement | Contact Type | Alternate Keying Position of Shell |
| <b>MS</b>      | <b>311</b>      | <b>3</b>    | <b>H</b>      | <b>16-24</b>                   | <b>P</b>     | <b>6</b>                           |

#### 1. COMMERCIAL HERMETIC CONNECTOR STYLE

|           |                                                       |
|-----------|-------------------------------------------------------|
| <b>PT</b> | Standard Bayonet lock connector with Solder Contacts. |
|-----------|-------------------------------------------------------|

#### 2. SHELL STYLE

|           |                                   |
|-----------|-----------------------------------|
| <b>02</b> | Square Flange Receptacle          |
| <b>07</b> | Jam Nut (D-Hole Mount) Receptacle |
| <b>I</b>  | Solder Mounted Receptacle         |

#### 3. SERVICE CLASS

|          |                                   |
|----------|-----------------------------------|
| <b>H</b> | Hermetic without interfacial Seal |
| <b>Y</b> | Hermetic with interfacial Seal    |

#### 4. SHELL SIZE & INSERT ARRANGEMENT

|                |                                                 |
|----------------|-------------------------------------------------|
| <b>Page 84</b> | Shell Size and Insert Arrangement are together. |
|----------------|-------------------------------------------------|

#### 5. CONTACT

|          |              |
|----------|--------------|
| <b>P</b> | Pin Contacts |
|----------|--------------|

#### 6. ALTERNATE KEYING POSITION - ROTATION

|                |                                                                                                                                     |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>Page 86</b> | W, X, Y, Z designate that insert is rotated in its shell from normal position. No letter required for normal (no rotation position) |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------|

#### 1. MILITARY CONNECTOR TYPE

|           |                              |
|-----------|------------------------------|
| <b>MS</b> | Designates Military Standard |
|-----------|------------------------------|

#### 2. MILITARY SPECIFIC NUMBER

|            |                                                                  |
|------------|------------------------------------------------------------------|
| <b>311</b> | Designates Family number for MIL-DTL-26482, Series 1 Solder Type |
|------------|------------------------------------------------------------------|

#### 3. MILITARY SHELL STYLE

|          |                         |
|----------|-------------------------|
| <b>2</b> | Box Mount Receptacle    |
| <b>3</b> | Solder Mount Receptacle |
| <b>4</b> | Jam Nut Receptacle      |

#### 4. SERVICE CLASS

|          |                                |
|----------|--------------------------------|
| <b>H</b> | Hermetic with interfacial Seal |
|----------|--------------------------------|

#### 5. SHELL SIZE & INSERT ARRANGEMENT

|                |                                                                                                                            |
|----------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Page 84</b> | Adding a "Y" designates flat eyelet pin contacts example: 20Y41, or "C" designates solder cup pin contacts example: 20C41. |
|----------------|----------------------------------------------------------------------------------------------------------------------------|

#### 6. CONTACT

|          |              |
|----------|--------------|
| <b>P</b> | Pin Contacts |
|----------|--------------|

#### 7. ALTERNATE KEYING POSITION - ROTATION

|                |                                                                                                                                     |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>Page 86</b> | W, X, Y, Z designate that insert is rotated in its shell from normal position. No letter required for normal (no rotation position) |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------|

Hermetic connectors are supplied with tin plated shells.

38999 III

38999 II

38999 I

SJT

Aquacon

2M

83723


26482

26500

# PTIH (MS3113H)


Hermetic Solder Mounting Receptacle

38999 III  
38999 II  
38999 I  
SJT  
Aquacon  
2M  
83723  
26482  
26500

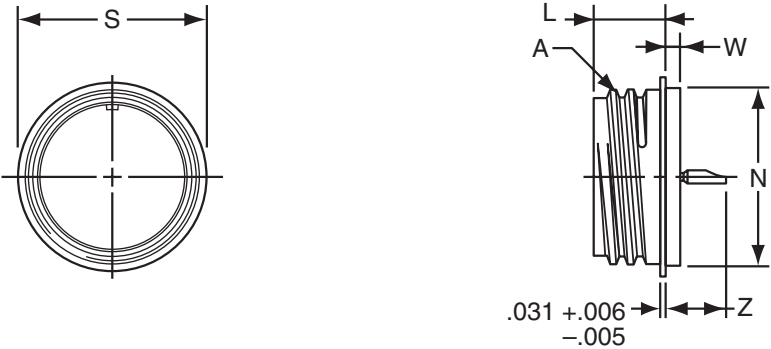

- PTIH-XX-XXX** - Solder cup pin contacts without interfacial seal
- PTIY-XX-XXX** - Solder cup pin contacts with interfacial seal
- MS3113H-XXCXXX** - Solder cup pin contacts with interfacial seal
- PTIH-XX-XXX (100)** - Flat eyelet pin contacts without interfacial seal
- PTIY-XX-XXX (100)** - Flat eyelet pin contacts with interfacial seal
- MS3113H-XXYXXX** - Flat eyelet pin contacts with interfacial seal

| Shell Size | Recept. Front View | Receptacle Side View |                |                     |                |        |
|------------|--------------------|----------------------|----------------|---------------------|----------------|--------|
|            | G Dia. Max.        | A Dia. +.001 - .005  | L +.025 - .016 | N Dia. +.001 - .005 | W +.011 - .010 | Z Max. |
| 6          | .511               | .348                 | .447           | .438                | .094           | .386   |
| 8          | .636               | .473                 | .447           | .562                | .094           | .386   |
| 10         | .761               | .590                 | .447           | .672                | .094           | .386   |
| 12         | .855               | .750                 | .447           | .781                | .094           | .386   |
| 14         | .980               | .875                 | .447           | .906                | .094           | .386   |
| 16         | 1.105              | 1.000                | .447           | 1.031               | .094           | .386   |
| 18         | 1.229              | 1.125                | .447           | 1.156               | .094           | .386   |
| 20         | 1.323              | 1.250                | .509           | 1.250               | .094           | .386   |
| 22         | 1.449              | 1.375                | .509           | 1.375               | .125           | .418   |
| 24         | 1.574              | 1.500                | .542           | 1.500               | .125           | .418   |

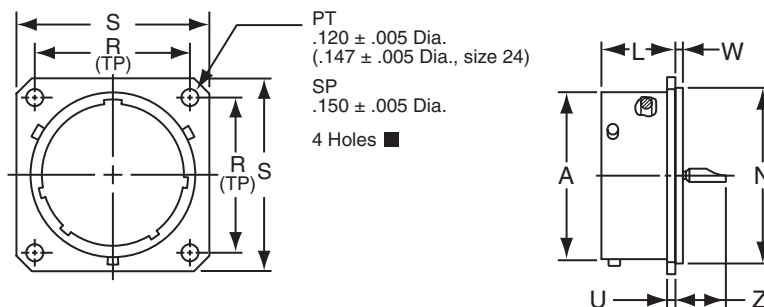

**PT02H-XX-XXX** - Solder cup pin contacts without interfacial seal

**P02Y-XX-XXX** - Solder cup pin contacts with interfacial seal



**PT02H-XX-XXX (100)** - Flat eyelet pin contacts without interfacial seal

**PT02Y-XX-XXX (100)** - Flat eyelet pin contacts with interfacial seal

| Shell Size | Recept. Front View |         | Receptacle Side View     |            |                     |                          |                     |           |
|------------|--------------------|---------|--------------------------|------------|---------------------|--------------------------|---------------------|-----------|
|            | R (TP)             | S ±.016 | A Dia.<br>+.001<br>-.005 | K<br>±.015 | L<br>+.025<br>-.015 | N Dia.<br>+.001<br>-.005 | U<br>+.011<br>-.010 | Z<br>Max. |
| 6          | .511               | .688    | .348                     | .047       | .494                | .438                     | .062                | .344      |
| 8          | .636               | .812    | .473                     | .047       | .494                | .562                     | .062                | .344      |
| 10         | .761               | .938    | .590                     | .047       | .494                | .672                     | .062                | .344      |
| 12         | .855               | 1.031   | .750                     | .047       | .494                | .781                     | .062                | .344      |
| 14         | .980               | 1.125   | .875                     | .047       | .494                | .906                     | .062                | .344      |
| 16         | 1.105              | 1.219   | 1.000                    | .047       | .494                | 1.031                    | .062                | .344      |
| 18         | 1.229              | 1.312   | 1.125                    | .047       | .494                | 1.156                    | .062                | .344      |
| 20         | 1.323              | 1.438   | 1.250                    | .047       | .556                | 1.250                    | .062                | .344      |
| 22         | 1.449              | 1.562   | 1.375                    | .079       | .556                | 1.375                    | .062                | .377      |
| 24         | 1.574              | 1.688   | 1.500                    | .079       | .588                | 1.500                    | .062                | .377      |

# PT07H (MS3114H)

Hermetic Jam Nut Receptacle




- PT07H-XX-XXX** - Solder cup pin contacts without interfacial seal
- PT07Y-XX-XXX** - Solder cup pin contacts with interfacial seal
- MS3114H-XXCXXX** - Solder cup pin contacts with interfacial seal
- PT07H-XX-XXX (100)** - Flat eyelet pin contacts without interfacial seal
- PT07Y-XX-XXX (100)** - Flat eyelet pin contacts with interfacial seal
- MS3114H-XXYXXX** - Flat eyelet pin contacts with interfacial seal

| Shell Size | Recept. Front View |                            |                             | Receptacle Side View   |                        |                   |      |                   |        |
|------------|--------------------|----------------------------|-----------------------------|------------------------|------------------------|-------------------|------|-------------------|--------|
|            | S $\pm .016$       | H Hex $+ .001$<br>$- .005$ | A Dia. $+ .001$<br>$- .005$ | K $+ .043$<br>$- .016$ | M $+ .031$<br>$- .000$ | P Panel Thickness |      | R Thread Class 2A | Z Max. |
| 6          | .812               | .625                       | .348                        | .094                   | .696                   | .125              | .062 | .4375-28 UNEF     | .206   |
| 8          | .938               | .750                       | .473                        | .047                   | .696                   | .125              | .062 | .5625-24 NEF      | .206   |
| 10         | 1.062              | .875                       | .590                        | .047                   | .696                   | .125              | .062 | .6875-24 NEF      | .206   |
| 12         | 1.250              | 1.062                      | .750                        | .047                   | .696                   | .125              | .062 | .8750-20 UNEF     | .206   |
| 14         | 1.375              | 1.188                      | .875                        | .047                   | .696                   | .125              | .062 | 1.0000-20 UNEF    | .206   |
| 16         | 1.500              | 1.312                      | 1.000                       | .047                   | .696                   | .125              | .062 | 1.1250-18 NEF     | .206   |
| 18         | 1.625              | 1.438                      | 1.125                       | .047                   | .696                   | .125              | .062 | 1.2500-18 NEF     | .206   |
| 20         | 1.812              | 1.562                      | 1.250                       | .047                   | .884                   | .250              | .062 | 1.3750-18 NEF     | .081   |
| 22         | 1.938              | 1.688                      | 1.375                       | .079                   | .884                   | .250              | .062 | 1.5000-18 NEF     | .081   |
| 24         | 2.062              | 1.812                      | 1.500                       | .079                   | .917                   | .250              | .062 | 1.6250-18 NEF     | .048   |



# 26500 Pyle

Amphenol®/Pyle Commercial 26500 Connectors are qualified to Military Specification MIL-DTL-26500, as well as numerous high performance customer specifications.



These connectors are available in stainless steel shells, with bayonet or threaded coupling, and are qualified to meet the specifications of the following MIL-DTL-26500 classes:

| MIL-DTL-26500 Classes | Amphenol/Pyle Series Classes | Hardware Description | Finish  |
|-----------------------|------------------------------|----------------------|---------|
| Class H Hermetic      | HC                           | CRS/Stainless Steel  | Various |

Amphenol®/Pyle® is an experienced supplier of highly reliable hermetic connectors for the aircraft industry. Amphenol's ZZL and ZZB series of hermetic receptacles are designed to the requirements of MIL-DTL-26500, they are available in stainless steel shells with gold-plated, nickel-iron alloy contacts.

Hermetic receptacles are available in shell sizes 8, 10, 12, 14, 16, 18, 22, 24 and 28. The hermetic series is offered in a variety of receptacle shell styles, which include solder mount, square flange and "D" hole mount. These connectors can be ordered with either eyelet, solder-well or printed circuit tail pin contacts.

Consult Amphenol Aerospace for more information on hermetic connectors, and for optional connector designs.


# Commercial 26500, Pyle

## Insert Arrangements


### FRONT FACE OF PIN INSERT OR REAR FACE OF SOCKET INSERT ILLUSTRATED

Contact cavities are identified with a spiral guide line indicating cavity sequence. The first and last cavities are numbered and every tenth cavity is bracketed.


Symmetrical about center line.

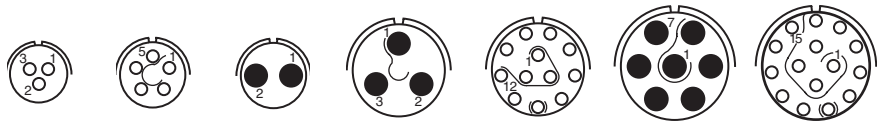

| Insert Arrangement | 08-03 | 10-05 | 10-20 | 12-03 | 12-12 | 14-07 | 14-15 |
|--------------------|-------|-------|-------|-------|-------|-------|-------|
| Service Rating     | I     | I     | I     | I     | I     | I     | I     |
| Number of Contacts | 3     | 5     | 2     | 3     | 12    | 7     | 15    |
| Contact Size       | 20    | 20    | 16    | 16    | 20    | 16    | 20    |

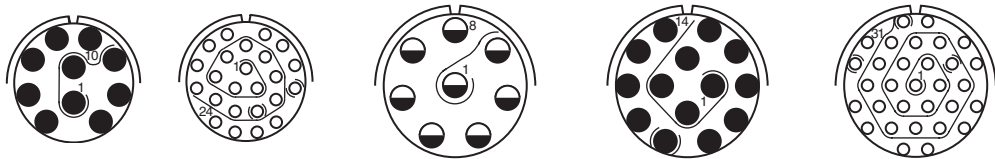

| Insert Arrangement | 16-10 | 16-24 | 18-08 | 18-14 | 18-31 |
|--------------------|-------|-------|-------|-------|-------|
| Service Rating     | I     | I     | I     | I     | I     |
| Number of Contacts | 10    | 24    | 8     | 14    | 31    |
| Contact Size       | 16    | 20    | 12    | 16    | 20    |

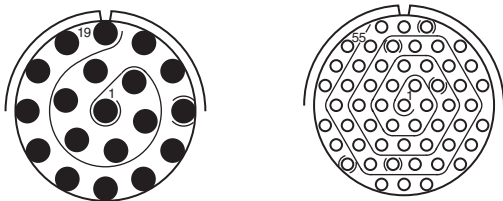

| Insert Arrangement | 22-19 | 22-55 |
|--------------------|-------|-------|
| Service Rating     | I     | I     |
| Number of Contacts | 19    | 55    |
| Contact Size       | 16    | 20    |

CONTACT LEGEND

○ 20    ● 16    ◐ 12

# Pyle ZZL/ZZB, MIL-DTL-26500 TYPE

Hermetic (three styles), Threaded or Bayonet

## HOW TO ORDER COMMERCIAL HERMETIC CONNECTORS

| 1.         | 2.            | 3.          | 4.         | 5.                 | 6.           | 7.               | 8.              | 9.         |
|------------|---------------|-------------|------------|--------------------|--------------|------------------|-----------------|------------|
| Series     | Service Class | Shell Style | Shell Size | Insert Arrangement | Contact Type | Alternate Keying | Contact Plating | Variations |
| <b>ZZL</b> | <b>HC</b>     | <b>14</b>   | <b>8</b>   | <b>55</b>          | <b>P</b>     | <b>6</b>         | <b>E</b>        | <b>H45</b> |



| 1. SERIES  |                   |
|------------|-------------------|
| <b>ZZL</b> | Threaded Coupling |
| <b>ZZB</b> | Bayonet Coupling  |

| 2. SERVICE CLASS |                |
|------------------|----------------|
| <b>HC</b>        | Hermetic Class |

| 3. SHELL STYLE |                                 |
|----------------|---------------------------------|
| <b>14</b>      | Solder Mount Receptacle         |
| <b>15</b>      | Single Hole Mounting Receptacle |
| <b>17</b>      | Square Flange Receptacle        |

| 4. SHELL SIZE |           |           |           |           |           |           |           |           |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| <b>8</b>      | <b>10</b> | <b>12</b> | <b>14</b> | <b>16</b> | <b>18</b> | <b>22</b> | <b>24</b> | <b>28</b> |

| 5. INSERT ARRANGEMENT |  |
|-----------------------|--|
| See page 92           |  |

| 6. CONTACT TYPE |                                       |
|-----------------|---------------------------------------|
| <b>P</b>        | Pin Contacts with standard gold plate |

| 7. ALTERNATE KEYING POSITION     |  |
|----------------------------------|--|
| 6, 7, 8, 9, 10 (Omit for Normal) |  |
| See below                        |  |

| 8. CONTACT STYLE |            |
|------------------|------------|
| <b>E</b>         | Eyelet     |
| <b>W</b>         | Solderwell |


Consult Amphenol Aerospace for ordering information of printed circuit tail contacts.

| 9. VARIATION |                                                               |
|--------------|---------------------------------------------------------------|
| <b>H45</b>   | 304L Stainless Steel Shell                                    |
| <b>H52</b>   | Tinned Termination Tails                                      |
| <b>H56</b>   | Same as standard; gold contacts                               |
| <b>H77</b>   | 304L Stainless Steel Shell, Inconel Contacts                  |
| <b>H127</b>  | Same as H125 except 304L Stainless Steel Shell                |
| <b>H146</b>  | 303 Stainless Steel Shell, 100 Micro-inch Gold                |
| <b>H152</b>  | 304L Stainless Steel Shell with Individual Beads, Loose Seals |
| <b>H177</b>  | 303 Stainless Steel Shell, Loose Seals                        |
| <b>H181</b>  | Tin Plated Contacts                                           |


## ALTERNATE KEYING POSITIONS OF SHELLS

ALTERNATE POLARITY KEYWAY ARRANGEMENTS (Shell sizes 12, 14, 16, 18, 20, 22, 24, 28) View of front face of receptacle shell. Angles are counter-clockwise from "N" keyway. For plug shell, the key locations are clockwise when viewed from front of plug.

| Position        | For Connectors Size 8 and 10 |      |      |      | For Connectors Size 12, 14, 16, 18, 20, 22, 24 and 28 |      |      |      |
|-----------------|------------------------------|------|------|------|-------------------------------------------------------|------|------|------|
|                 | A                            | B    | C    | D    | A                                                     | B    | C    | D    |
| Normal          | 105°                         | 140° | 215° | 265° | 105°                                                  | 140° | 215° | 265° |
| <b>6</b>        | 102°                         | 132° | 248° | 320° | 18°                                                   | 149° | 192° | 259° |
| <b>7</b>        | 80°                          | 118° | 230° | 312° | 92°                                                   | 152° | 222° | 342° |
| <b>8</b>        | 35°                          | 140° | 205° | 275° | 84°                                                   | 152° | 204° | 334° |
| <b>9</b>        | 64°                          | 155° | 234° | 304° | 24°                                                   | 135° | 199° | 240° |
| <b>Y or 10*</b> | 25°                          | 115° | 220° | 270° | 98°                                                   | 152° | 268° | 338° |



# GLOBAL LOCATIONS

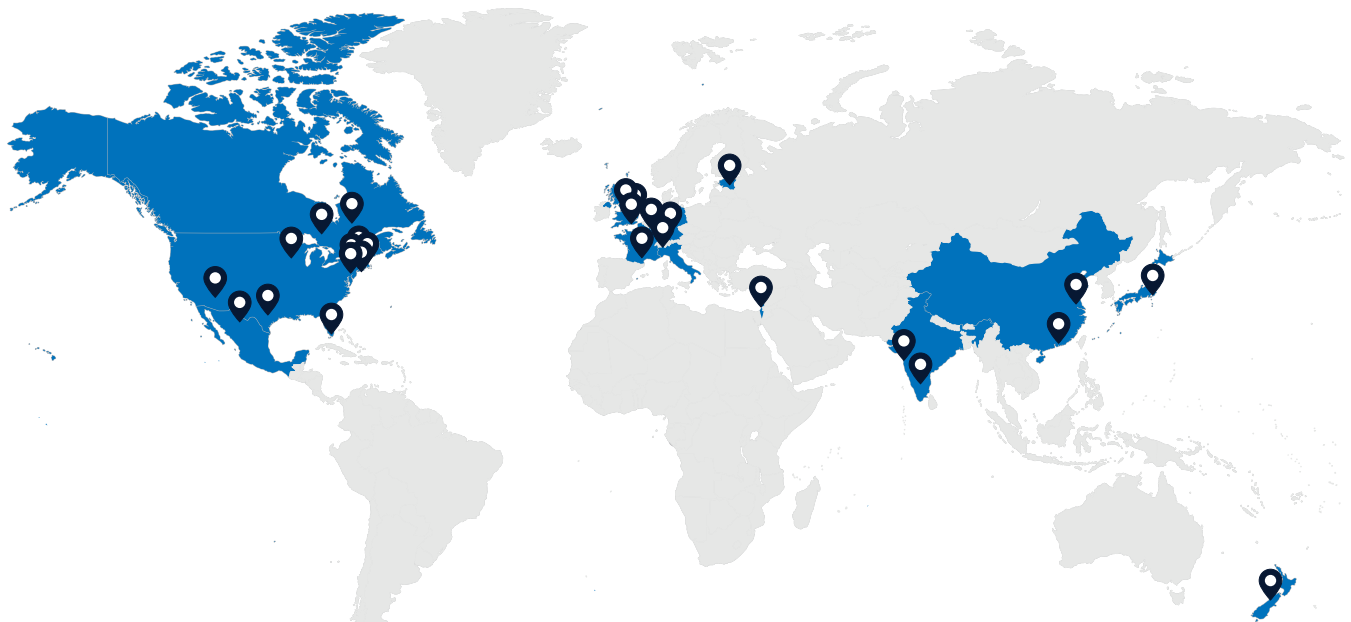

## **Amphenol Aerospace Operations**

40-60 Delaware Avenue  
Sidney, NY 13838  
800-678-0141

## **Amphenol Commercial Air Division**

40-60 Delaware Avenue  
Sidney, NY 13838  
1-800-687-0141

## **Amphenol Nexus Technologies**

50 Sunnyside Avenue  
Stamford, CT 06902  
203-327-7300

## **Amphenol PCD**

72 Cherry Hill Drive  
Beverly, MA 01915  
978-624-3400

## **Amphenol SV Microwave**

2400 Centrepark West Drive  
West Palm Beach, FL  
561-840-1800

## **Amphenol Times Microwave, Inc.**

358 Hall Avenue  
Wallingford, CT 06492  
800-867-2629

## **Amphenol Fiber Systems International**

1300 Central Expressway North, Suite 100  
Allen, TX 75013  
214-547-2400

## **Amphenol Borisch Technologies**

4511 East Paris AVE  
Grand Rapids, MI 49512  
616-554-9820

## **Amphenol Printed Circuits**

91 Northeastern Boulevard  
Nashua, NH 03062  
603-324-4500

## **Amphenol Canada**

605 Milner Avenue  
Toronto, ON Canada M1B 5X6  
416-291-0647

## **Amphenol Invotec**

Unit 1-3, Hedging Lane Industrial Estate  
Dosthill, Tamworth, B77 5HH United Kingdom  
+44 (0) 1827 263250

## **Amphenol Ionix Systems**

Prospect House, Taylor Business Park  
Risley, Warrington, WA3 6HP United Kingdom  
+44 (0) 1942 685200

## **Amphenol Limited**

Thanet Way  
Whitstable, Kent, CT5 3JF United Kingdom  
+44 (0) 1227 773200

## **Amphenol Socapex**

948 Promenade De L'Arve – BP 29  
74311 Thyez France  
+33 (0) 4 50 89 28 00

## **Amphenol Air LB SAS**

2 Rue Clément Ader, Zac de Wé  
08110 Carignan France  
+33 (0) 03 24 22 78 49

## **Amphenol AirLB GmbH**

Am Kleinbahnhof 4  
D-66740 Saarlouis Germany  
+49 (0) 68 31/98 10 0

## **Amphenol SEFEE**

Z.I. des Cazes – BP243  
12402 Saint-Affrique Cedex France  
+33 (0) 5 65 98 11 00

## **Amphenol Interconnect India**

105, Bhosari Industrial Area  
Pune – 411 026 India  
+91 20 27120363

## **Amphenol Japan, Ltd.**

471-1, Deba, Ritto-City  
Shiga, 520 3041 Japan  
+81 77 553 8501

## **Amphenol Martec Limited**

St. Augustines Business Park  
Swalecliffe, Whitstable, Kent  
CT5 2QJ United Kingdom  
+44 (0) 1227 793 733

## **Amphenol Optimize**

Carretera Internacional Km 6.5  
Col. Parque Industrial  
Nogales, Sonora, México. C.P. 84094  
+52 (631) 311-160

## **Amphenol Ionix Systems OÜ**

Pikk Street 59b  
Kuressaare 93815 Estonia  
+372 4521 780

## **AMAO – European Sales Operations**

Via Barbaiana 5  
20020 Lainate Milano, Italy  
+39 02 932 541

## **Amphenol Bar-Tec Ltd.**

3 Hagavish st  
POB 2479 Kfar-Saba 44641  
Israel  
+972-9-7644100

## **Phitek**

Level 4, 2 Kingdon Street  
Newmarket, Auckland 1023  
New Zealand  
+64 9 524 2984



[www.amphenolmao.com](http://www.amphenolmao.com)