





Specifications

Rated current:	350A@ ambient temperature 70°C	Mating cycles:	50 cycles
Rated voltage:	1500V (DC)	Waterproof:	IP67 & IPX9K
Operating temperature:	-40 to 125°C	IP2XB (Socket)	Yes
Insulation resistance:	200 MΩ Min	Ambient temperature:	-40 to 70°C
Dielectric withstanding voltage:	4000V AC	RoHS	Yes

Receptacle

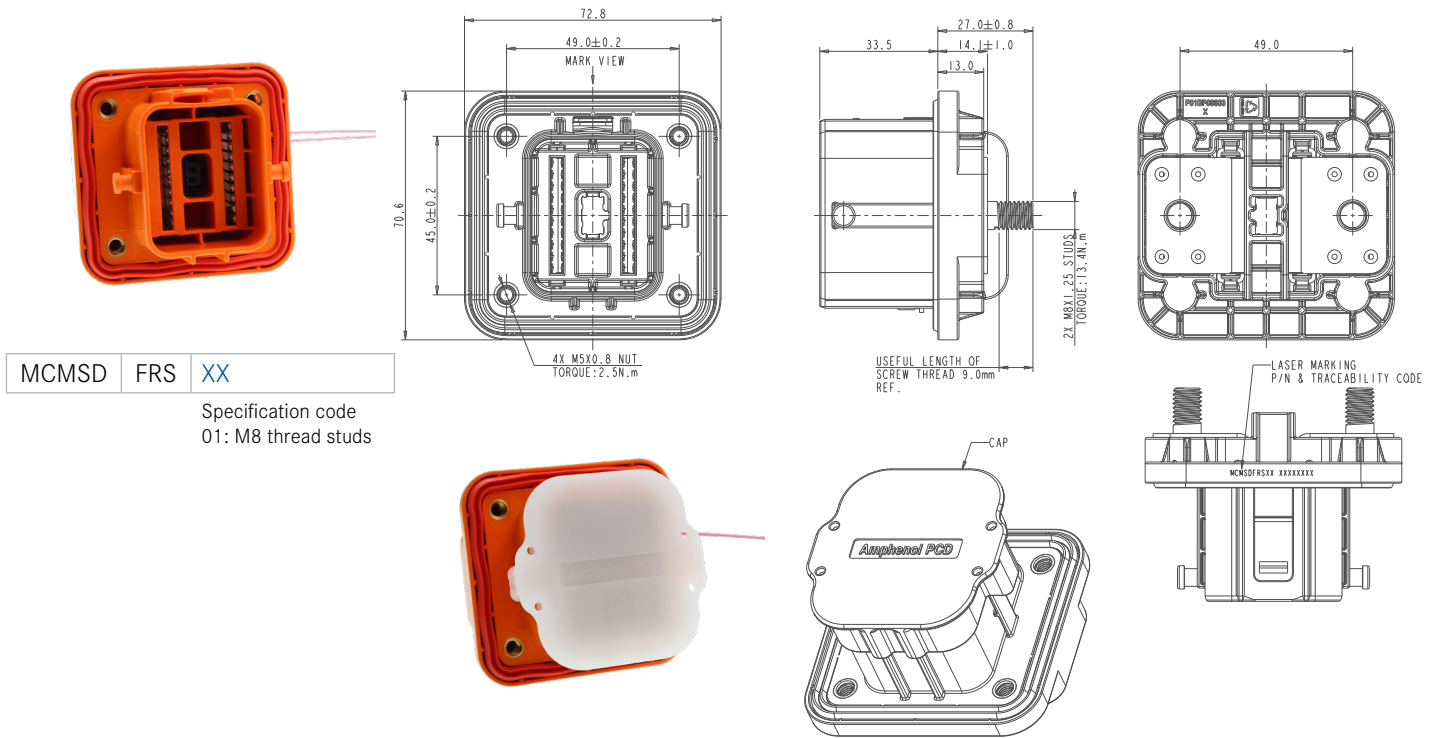

Plug

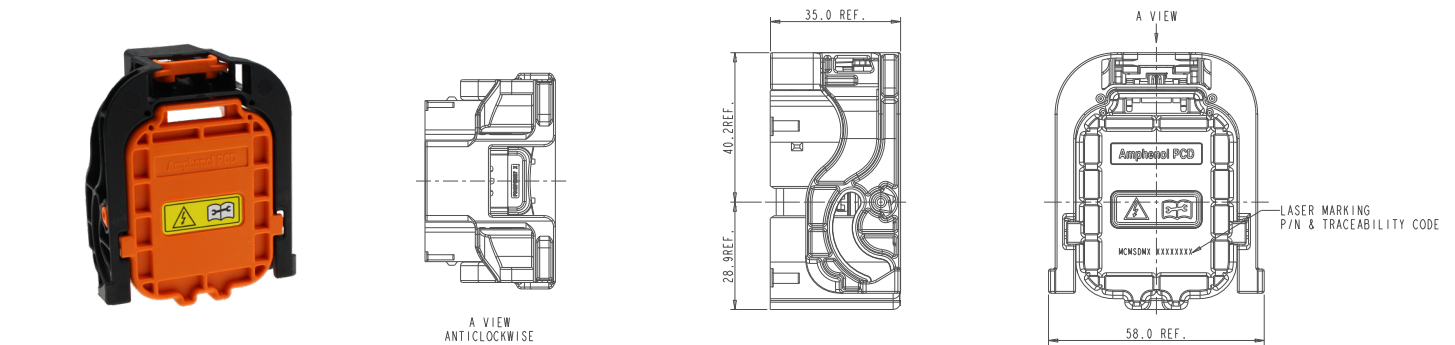

MCMSSD	M	X
--------	---	---

HVIL code
0: without HVIL
1: with HVIL