


Amphenol LTW



# **X-Lok Push Lock Series**

## **Metal Mini Size**



Extreme Durability • Alternative Solution to M12 • Blind Mating

# Amphenol LTW

## X-Lok Push Lock Metal Mini Size

**Blind mating with audible and tactile feedback**

### Product Overview

Amphenol LTW's X-Lok Push Lock connector offers secure, efficient and cost effective connectivity. Now unveiling the metal design, the robust construction and intuitive push lock mechanism can ensure reliable connections in the very roughest conditions. It is suitable for applications that requires extreme environmental resistance.

The X-Lok Series enable quicker installation than traditional threaded solutions. With UL1977 & 2238+50e certification, ALTW's X-Lok is your ideal solution for harsh environment and outdoor applications.

- Alternative solution to M12
- Excellent EMC shielding (stainless steel upon request)
- Power AC/DC, data, signal or hybrid
- Nominal current 0.5A ~ 16A
- Rated voltage up to 300V
- High data transmission up to 10 Gbps
- Long service life  $\geq 1,000$  cycles
- Saving on-site installation time & costs
- Exponentially increase installation outputs
- Ingress protection up to IP68
- Salt spray up to 96h (mated), 48h (unmated)





# Amphenol LTW

## X-Lok Push Lock Series

### Robust Mechanical Design

#### Applications

- LED
- Industrial automation
- Heavy equipment
- Railway mass transit
- Renewable energies
- Hybrid electric vehicles
- Medical
- Lifts and materials handling
- Broadband wireless access
- Transportation
- Remote video response center
- Marine Electronics
- Autonomous Vehicles
- Automotive diagnostics
- Automated meter reading
- Test and measurement equipment
- Rugged IT





## Field Installable




- ✓ Rated Voltage (AC/DC):  
300V (2-8 pins), 30V (9-33 pins)
- ✓ Operating Temperature: -40°C ~ +105°C
- ✓ Mating Cycle: 1,000
- ✓ Corrosion resistance 48h
- ✓ Wire AWG: 18 - 26 AWG
- ✓ Cable O.D. Ø4.0 - Ø8.0mm
- ✓ Frequency range 10 ~ 55Hz / Amplitude 1.52mm

Part Number	AS <sup>①</sup> -2B <sup>③</sup> 4 <sup>⑤</sup> 5-QL7001			
Dimension (mm)				
Current Rating <sup>①</sup>	Y (0.5A: 18-33 pins)*   Z (1.5A: 9-17 pins)*   U (2A: 6-8 pins)   D (5A: 2-5 pins)			
No. of Contacts <sup>②</sup>	02 - 33**			
Connector Gender <sup>③</sup>	M (male)*   F (female)			
Contact Gender <sup>④</sup>	M (male)*   F (female)			
Assemble Style <sup>⑤</sup>	A (crimp)* 	B (screw in) 	E (push in)* 	G (solder)* 
Mating Style	Q (push lock)			
Back Shell	L (straight)			
IP Rating	7 (IP67, mated)			

\* Upon request

\*\* Ultra high density upon request

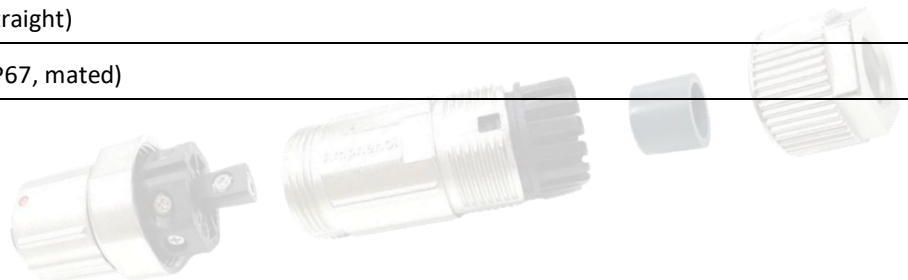



# Overmolded Cable



- ✓ Rated Voltage (AC/DC):  
300V (2-8 pins), 30V (9-33 pins)
- ✓ Operating Temperature: -20°C ~ +80°C
- ✓ Mating Cycle: 1,000
- ✓ Corrosion resistance 48h
- ✓ Wire AWG: 20 - 26 AWG
- ✓ Cable O.D.  $\Phi$ 3.8 –  $\Phi$ 7.5mm
- ✓ Frequency range 10 ~ 55Hz / Amplitude 1.52mm

Part Number	AS 1-2 3 B 4 5 M-Q 6 8 7 8
Dimension (mm) <sup>2)</sup>	
Current Rating 1	Y (0.5A: 18-33 pins) Z (1.5A: 9-17 pins) U (2A: 6-8 pins) D (5A: 2-5 pins)
High Speed 2	A (Cat 6A) None (others)
No. of Contacts 3	02 - 33**
Connector Type	B (without SR)
Connector Gender 4	M (male)* F (female)
Contact Gender 5	M (male)* F (female)
Assembly Style	M (molding)
Mating Style	Q (push lock)
Back Shell 6	L (straight) R (right angle)*
IP Rating	8 (IP68, mated)
Cable Style 7	B (UL20549) C (UL2517) F (UL21996) J (Cat 6A) P (SPE)
Cable Length (m) 8	01 - 99 <sup>1)</sup>

\* Upon request

\*\* Ultra high density upon request

<sup>1)</sup> Standard lengths: 1M, 2M, 3M, 4M, 5M and 10M. Higher MOQ might be required for non-standard lengths



<sup>2)</sup> Double-ended cable is upon request



## Receptacle with Wire



- ✓ Rated Voltage (AC/DC):  
300V (2-8 pins), 30V (9-33 pins)
- ✓ Operating Temperature: -40°C ~ +105°C
- ✓ Mating Cycle: 1,000
- ✓ Corrosion resistance 48h
- ✓ Receptacle nut thread: PG9
- ✓ Panel thickness: 4.5mm
- ✓ Wire AWG: 20 - 26 AWG
- ✓ Frequency range 10 ~ 55Hz / Amplitude 1.52mm

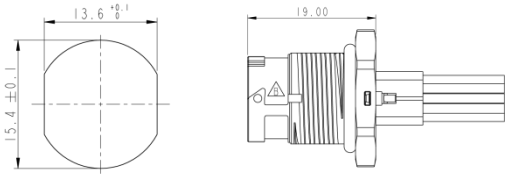Part Number	AS <b>1</b> - <b>2</b> <b>3</b> <b>4</b> <b>5</b> S-QC8 <b>6</b> <b>7</b>	
Dimension (mm)		
Current Rating <b>1</b>	<b>Y</b> (0.5A: 18-33 pins)* <b>Z</b> (1.5A: 9-17 pins) <b>U</b> (2A: 6-8 pins) <b>D</b> (5A: 2-5 pins)	
No. of Contacts <b>2</b>	02 - 33**	
Fasten Style <b>3</b>	<b>P</b> (front) <b>R</b> (rear)*	
Connector Gender <b>4</b>	<b>M</b> (male) <b>F</b> (female)*	
Contact Gender <b>5</b>	<b>M</b> (male) <b>F</b> (female)*	
Assembly Style	<b>S</b> (solder) 	
Mating Style	<b>Q</b> (push lock)	
Back Shell	<b>C</b> (circular)	
IP Rating	<b>8</b> (IP68, unmated)	
Cable Style <b>6</b>	<b>A</b> (UL2464) <b>B</b> (UL20549) <b>C</b> (UL2517)	
Wire Length (m) <b>7</b>	<b>0.50</b> <sup>1)</sup>	


\* Upon request

\*\* Ultra high density upon request

<sup>1)</sup> Standard lengths up to 0.5M. Higher MOQ might be required for non-standard lengths

### Fasten Style of Nut:


#### Front Fastened




#### How to Install



#### Rear Fastened



#### How to Install





# Receptacle



- ✓ Rated Voltage (AC/DC):  
300V (2-8 pins), 30V (9-33 pins)
- ✓ Operating Temperature: -40°C ~ +105°C
- ✓ Mating Cycle: 1,000
- ✓ Corrosion resistance 48h
- ✓ Receptacle nut thread: PG9
- ✓ Panel thickness: 4.5mm
- ✓ Frequency range 10 ~ 55Hz / Amplitude 1.52mm

Part Number	AS <sup>①</sup> - <sup>②</sup> <sup>③</sup> <sup>④</sup> <sup>⑤</sup> <sup>⑥</sup> <sup>⑦</sup> -QC8001	
Dimension (mm)		
Current Rating <sup>①</sup>	Y (0.5A: 18-33 pins) Z (1.5A: 9-17 pins)* U (2A: 6-8 pins)* D (5A: 2-5 pins)	
High Speed <sup>②</sup>	A (Cat 6A) None (others)	
No. of Contacts <sup>③</sup>	02 - 33**	
Fasten Style <sup>④</sup>	P (front) R (rear)*	
Connector Gender <sup>⑤</sup>	M (male) F (female)*	
Contact Gender <sup>⑥</sup>	M (male) F (female)*	
Assembly Style <sup>⑦</sup>	S (solder)*      P (PCB 180°) 	
Mating Style	Q (push lock)	
Back Shell	C (circular)	
IP Rating	8 (IP68, unmated)	

\* Upon request

\*\* Ultra high density upon request



# Best Solution from Amphenol LTW

---

## Contact Us

Luc Kan | Sales & Marketing

Email: [luc@ltw-tech.com](mailto:luc@ltw-tech.com)

Customer Service

Email: [sales@ltw-tech.com](mailto:sales@ltw-tech.com)

## Follow Us



(V070523)

*Unrivaled InterConnects for Harsh Environments*