




## Y Branch Harness with In-Line Fuse, 1500V

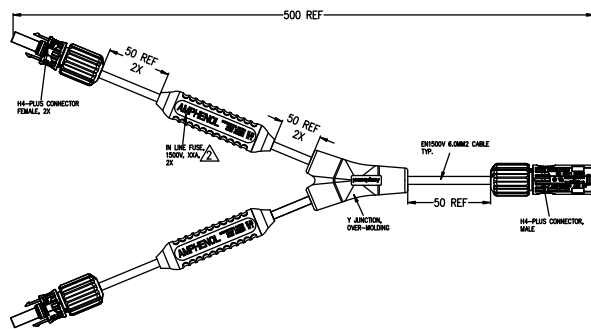

Description	Specification
Cable Conductor	6.0mm <sup>2</sup> /10AWG
Rated Voltage	1500V DC
Rated Current	Same as fuse rating
Degree of Protection	IP67(mated)
Ambient Temperature Range	-40°C to +50°C
Over-Molding Material	TPV, UL 94 V-0
Cable Bending Radius	30mm

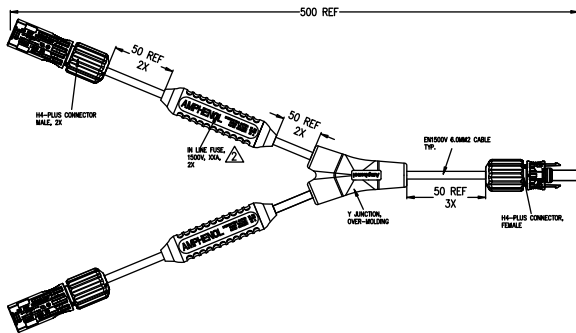

Order No.	Safety (A/V)	Type of Connector	Cable Size	Cable Length (mm)	Certifications
MDH-20-66-1Y04-H4S-P	04/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	 IEC/EN 62093 UL9703
MDH-20-66-1Y04-H4S-N	04/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	
MDH-20-66-1Y10-H4S-P	10/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	
MDH-20-66-1Y10-H4S-N	10/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	
MDH-20-66-1Y15-H4S-P	15/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	
MDH-20-66-1Y15-H4S-N	15/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	
MDH-20-66-1Y20-H4S-P	20/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	
MDH-20-66-1Y20-H4S-N	20/1500	H4 Plus	6.0mm <sup>2</sup> /10AWG	50	