

CapLock

Locking accessories for 38999, RJFTV, USBFTV Connectors and Caps...



NEW

The contribution of Connectors to better Cybersecurity - 38999 Series III, RJFTV, USBFTV...

Cybersecurity is achieved through a combination of precautions, not just one, such as a password. One way to reduce the risk of opportunity intrusion into the electronics through the connectors is by adding locking devices.



Main Characteristics :

- Locking system preventing any access to critical connector. Prevent from intrusion or human error.
- For MIL-DTL-38999 series III shell type.
- Shocks : IK06 : weight of 250g drop from 40cm [15.75 in] onto the caplock or pluglock mounted.
- 3D Printed with composite material.
- Colour : Grey.
- 2 Locking types available:
 - Cable seal, metal wire, must be cut to unlock.
 - Torx Safety screw, removable with an adapted key wrench.
- Operating temperature:
 - For CapLock and PlugLock: -40°C / +85°C
 - For Metal CapLock: -65°C / +200°C

CapLock is a locking ring that allows a Cap to lock onto a receptacle to secure the port access. Once locked around the cap, Caplock turns freely around the cap and prevents fingers from unlocking it.



Watch our video

Amphenol SOCAPEX

Avoids unauthorized access

CapLock Safety Torx Screw option

Scan & discover !

CapLock assembly instruction video

Markets & Applications



C5ISR
Network Access & Maintenance Ports securing
Military Computers Ports securing
SDR Radios Ports securing
Human Machine Interface securing



Naval
Consoles Ports securing
Network Access & Maintenance Ports securing
Data Centers




Military Aerospace & Airframe
Radars
Display unit
Flight control system



Military vehicles
Vetronics
Optronics
Communication Systems

Overall dimension

Part number type: **CapLock XX TX**

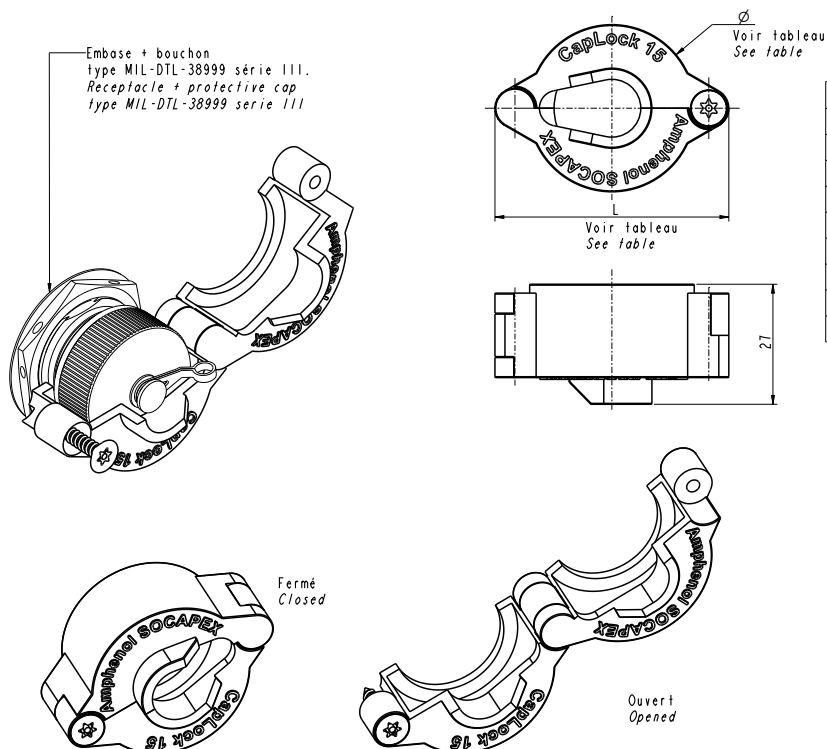


Shell size	$\varnothing \pm 0.2/[0.008]$	$L \pm 0.2/[0.008]$
T09	28.6 / [1.102]	43.6 / [1.692]
T11	33.6 / [1.299]	48.6 / [1.889]
T13	36.6 / [1.417]	51.6 / [2.007]
T15	37.6 / [1.456]	52.6 / [2.047]
T17	42.6 / [1.653]	57.6 / [2.244]
T19	44.6 / [1.732]	59.6 / [2.322]
T21	47.6 / [1.850]	62.6 / [2.440]
T23	50.6 / [1.968]	65.6 / [2.559]
T25	54.6 / [2.125]	69.6 / [2.716]

Tools to be ordered separatly




Part number type: **CapLock XX WR**

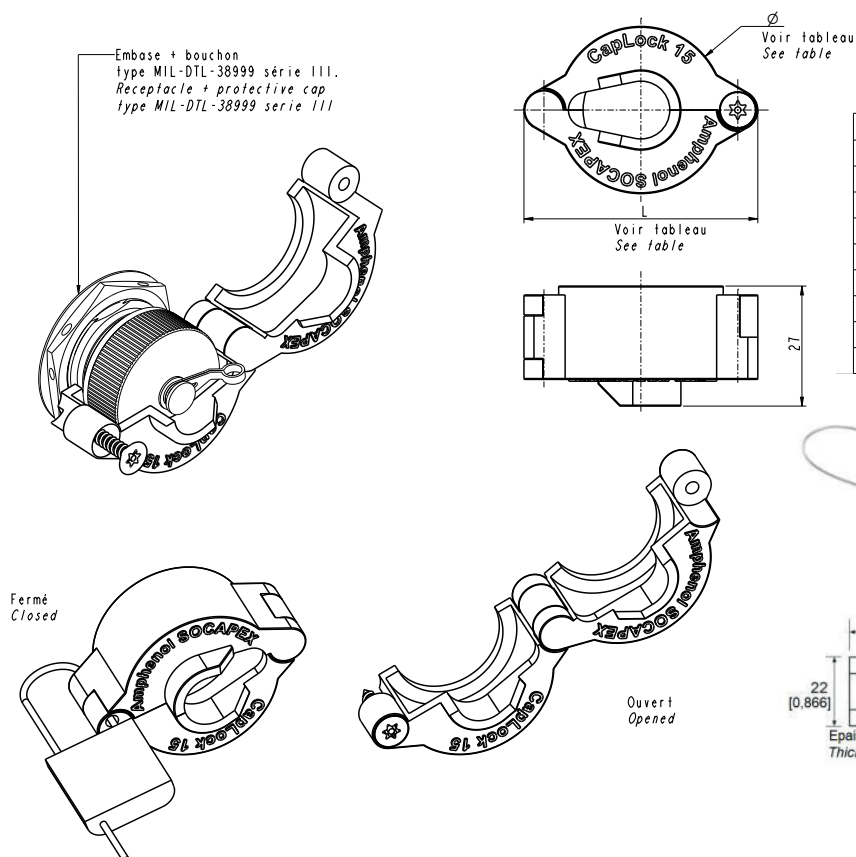

Shell size	$\varnothing \pm 0.2/[0.008]$	$L \pm 0.2/[0.008]$
T09	28.6 / [1.102]	43.6 / [1.692]
T11	33.6 / [1.299]	48.6 / [1.889]
T13	36.6 / [1.417]	51.6 / [2.007]
T15	37.6 / [1.456]	52.6 / [2.047]
T17	42.6 / [1.653]	57.6 / [2.244]
T19	44.6 / [1.732]	59.6 / [2.322]
T21	47.6 / [1.850]	62.6 / [2.440]
T23	50.6 / [1.968]	65.6 / [2.559]
T25	54.6 / [2.125]	69.6 / [2.716]

Included safety seal

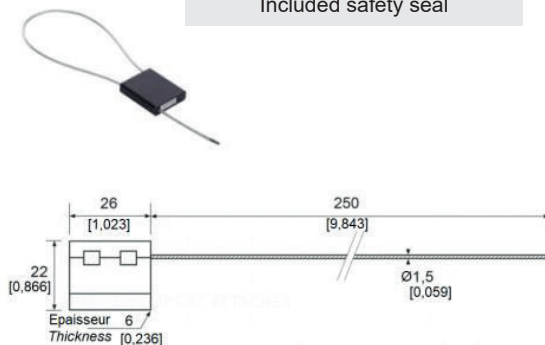

HOW TO ORDER

1.

2.

3.

Series	Shell size	Locking
CapLock	19	TX

1. Series

CapLock	Locking ring for caps of 38999 Series III Receptacles
---------	---

3. Locking

WR	Cable seal, metal wire to cut to unlock
TX	Torx Safety screw

2. Shell size


9	For MIL DTL 38999 Series III size 9 shells
11	For MIL DTL 38999 Series III size 11 and TV µCom shells
13	For MIL DTL 38999 Series III size 13 and MPOF TV and MDPF TV shells
15	For MIL DTL 38999 Series III size 15 and USB Field TV shells
17	For MIL DTL 38999 Series III size 17 shells
19	For MIL DTL 38999 Series III size 19 and RJF TV and LCF TV shells
21	For MIL DTL 38999 Series III size 21 shells
23	For MIL DTL 38999 Series III size 23 shells
25	For MIL DTL 38999 Series III size 25 shells

Examples :

Part number	Description
CapLock19TX	Locking ring for caps of 38999 Series III Receptacles size 19 with torx locking system
CapLock19WR	Locking ring for caps of 38999 Series III Receptacles size 19 with seal cable locking system

Amphenol SOCAPEX Other Solutions for Cybersecurity


Cybersecurity is achieved through a combination of precautions, not just one such as a password. Connectors can contribute

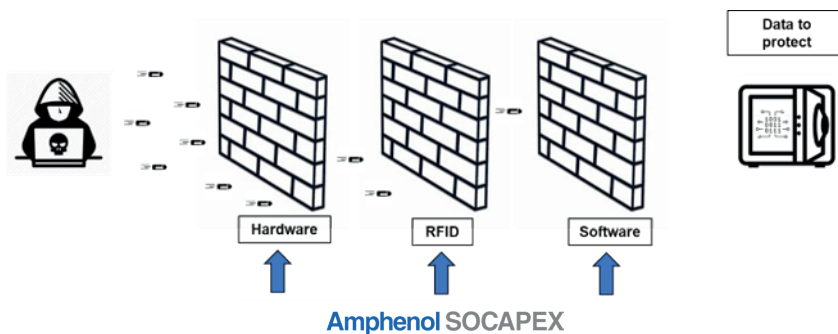

► Hardware : Go through Fiber Optics via our Media Converters



► Hardware : Use our receptacles which cannot be dismantled from outside the box

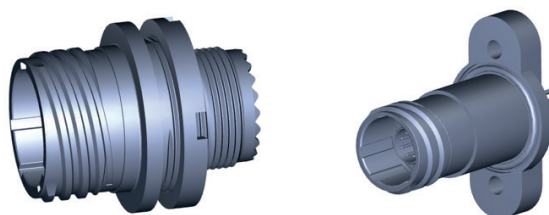

► Hardware : Use our Adaptaters RJ45 & USB ↔ 38999 & 26482

RJ45 ↔ MIL-DTL-26482 Type



- RJ45 ↔ Standard 26482 12-10 pin layout adapter
- ABS 1547 for Avionics applications

RJF Receptacle ↔ Quadrax receptacle



- RJ45 ↔ 2 Quadrax contacts - Bulkhead
- Avionics applications

USB ↔ MIL-DTL-26482 Type



- USB ↔ Standard 26482 12-10 pin layout adapter
- ABS 1547 for Avionics applications

USB FTV ↔ 38999 11-98 plug



- USB FTV ↔ Standard 38999 11-98 pin layout adapter
- C4ISR & Avionics applications

► RFID : Under investigation

