


Amphenol®



HD-BNC
By Amphenol®RF

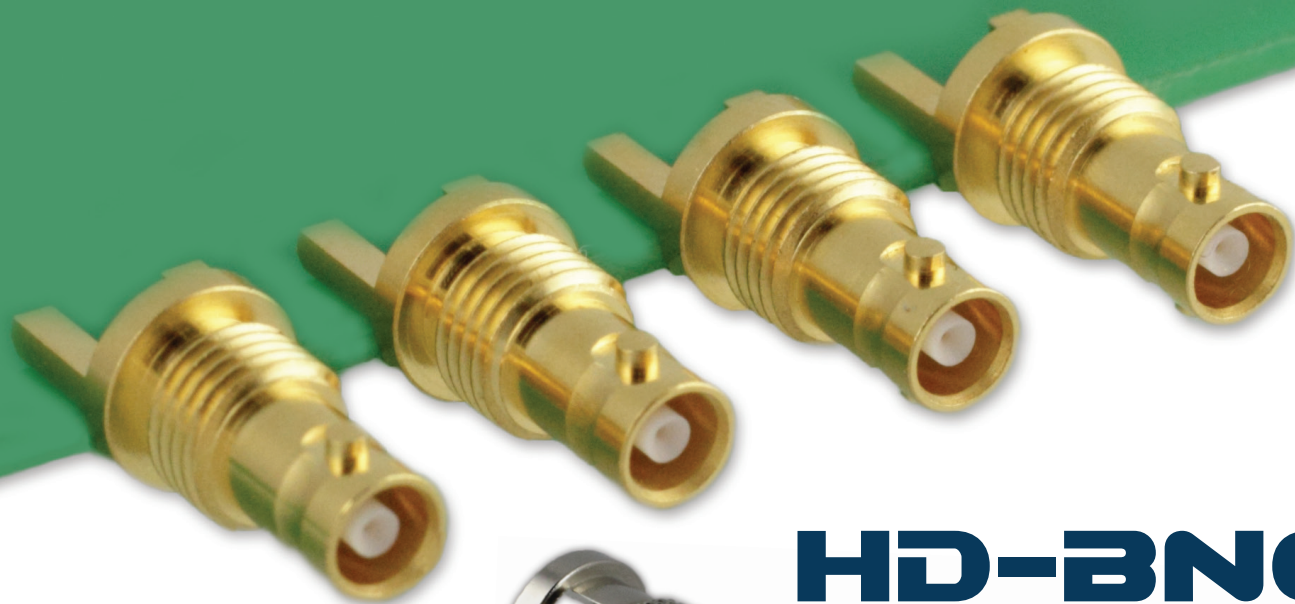

**High Density Connectivity
for a Higher Definition World**

アンフェノール


Product Description

Amphenol RF, the inventor of the BNC, introduces the High Density BNC family of connectors.


HD-BNC delivers TRUE 75 Ohm performance in a footprint 51% smaller than traditional BNC connectors, allowing 4X the density.

Engineered to enhance electrical and mechanical performance, the HD-BNC connector features the trusted, push and turn interface of a traditional BNC, providing tactile feedback and a positive lock for quick and guaranteed mating.


Using the same cable prep and termination specifications of legacy broadcast connectors makes adopting HD-BNC seamless.

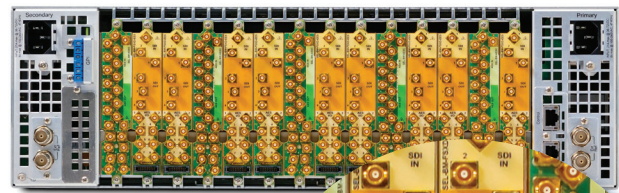

Above and Inset Image:
Selenio Broadcast system
from Harris.

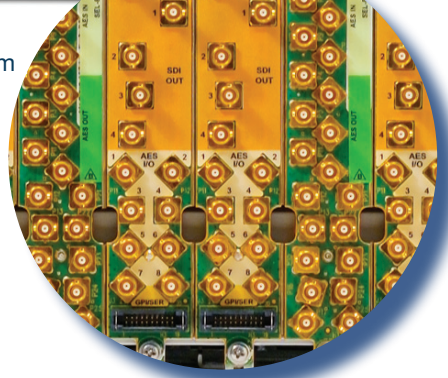

Applications

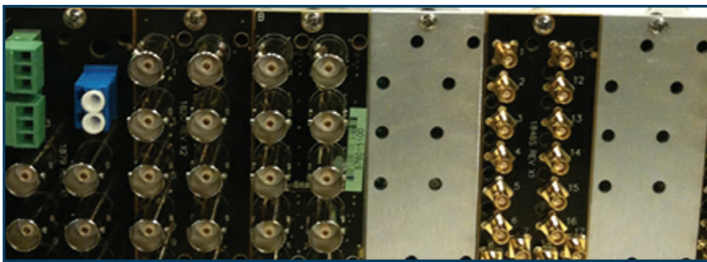

Digital A/V cards or Routing Systems

- Increased density hence room for ventilation
- Stack more cards in less rack space
- PCB solutions to maintain signal integrity for 3 Gbps+ applications
- SFPs with HD-BNCs



Mobile Broadcast

- Mechanically robust and reliable interface
- Trusted positive locking mechanism
- Lowers equipment weight



Studio Integration

- 3 Gbps+ signal for the distance over 190 m
- Same stripping and termination tools
- Patch panel solutions with HD-BNCs
- Availability of Installation and removal tool
- HD-BNC plug for 1694A type cables



Broadcast Cameras

- High Density without compromising signal integrity
- Helps reduce the equipment size and cost
- CCTV Market

Features and Benefits



- Provides 4x the density than regular BNC
- Trusted bayonet style positive lock
- Closed entry interface
- VSWR or Return Loss: 30dB min @ 3GHz
- Accomodates 1694A (RG-6) type cables
- Meets and exceeds SMPTE 292M and 424M standards for 3 Gbps
- Same user experience as traditional BNCs
- Recommended minimum pitch of 8 mm for cables < 5.4 mm (ex: 1855A types)
- Recommended minimum pitch of 9.5 mm for cables > 5.4 mm (ex: 1694A types)
- Complete product portfolio including Calibration kit and Precision adapters
- Assured mating with visual indicator

Technical Details

Electrical	
Impedance	75 Ohms
Frequency Range	0-6 GHz
Voltage Rating	170 Volts
Dielectric Withstanding Voltage	500 VRMS
Return Loss	30 dB Min @ 3 GHz
Contact Resistance	Center Contact: 5 m ohm Outer Contact: 2.5 m ohm
Insulation Resistance	10,000 M ohm minimum
Data Rate	3 Gbps or higher

Materials	
Male Contact	Brass, Amorphous (gold) Plating
Female Contact	Beryllium copper, Amorphous (gold) Plating
Outer Contacts	Beryllium copper, Nickel Plating
Body & Hardware	Brass, Nickel Plating

Mechanical	
Mating	Bayonet Positive Locking, Visual Indicator
Braid/Jacket Cable Affixmen	Hex crimp
Center Conductor Cable Affixment	Solder/ Crimp
Tool	Conventional crimp/ Die sets
Contact Captivation	All types as noted
Connector Durability	500 mating cycles minimum



Scan the QR Code to download SMPTE whitepaper or visit HDBNC.AmphenolRF.com.

Worldwide Distribution Network for HD-BNC



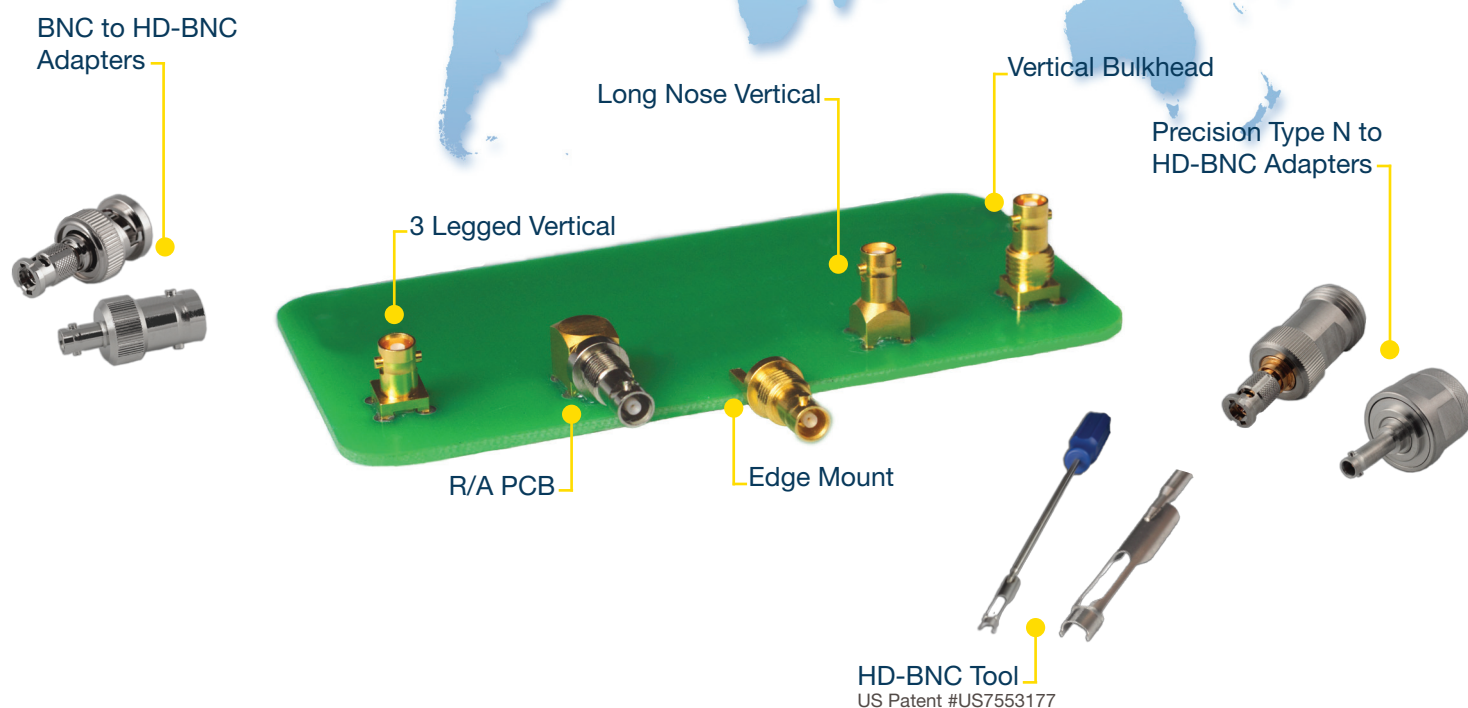


Image courtesy of Embrionix



Amphenol アンフェノール ジャパン株式会社

□ 本社・工場 〒520-3041 滋賀県栗東市出庭471-1

TEL 077-553-8503 (代) FAX 077-551-2200

□ 横浜オフィス 〒222-0033 神奈川県横浜市港北区新横浜2-2-8

TEL 045-473-9219 (代) FAX 045-473-9204

<http://www.amphenol.co.jp/industrial/>