



KEY FEATURES

2 Pin power & 10 pin signal contact

Quick mating


High durability

Excellent physical shock and vibration performance

ROHS compliant


MECHANICAL	
Durability	≥ 3000 次
Insertion and extraction force	200N max
电气特性	
Wire range	Signal contact: 0.35 mm ² Power contact: 6 to 10 mm ²
Rated current	Signal contact: 1A max Power contact: 60A max
Rated voltage	Signal contact: 24V Power contact: 800V DC
Insulator resistance	≥ 200MΩ
Dielectric withstanding voltage	Signal contact: 660V Power contact: 2600V DC
ENVIRONMENTAL	
Ambient temperature	-40°C to 55°C
Operating temperature	-40°C to 110°C
MATERIAL	
Housing	Thermoplastic
Contact	Copper / brass alloy, silver plating

RECEPTACLE P/N: HEV060AF2P10SW

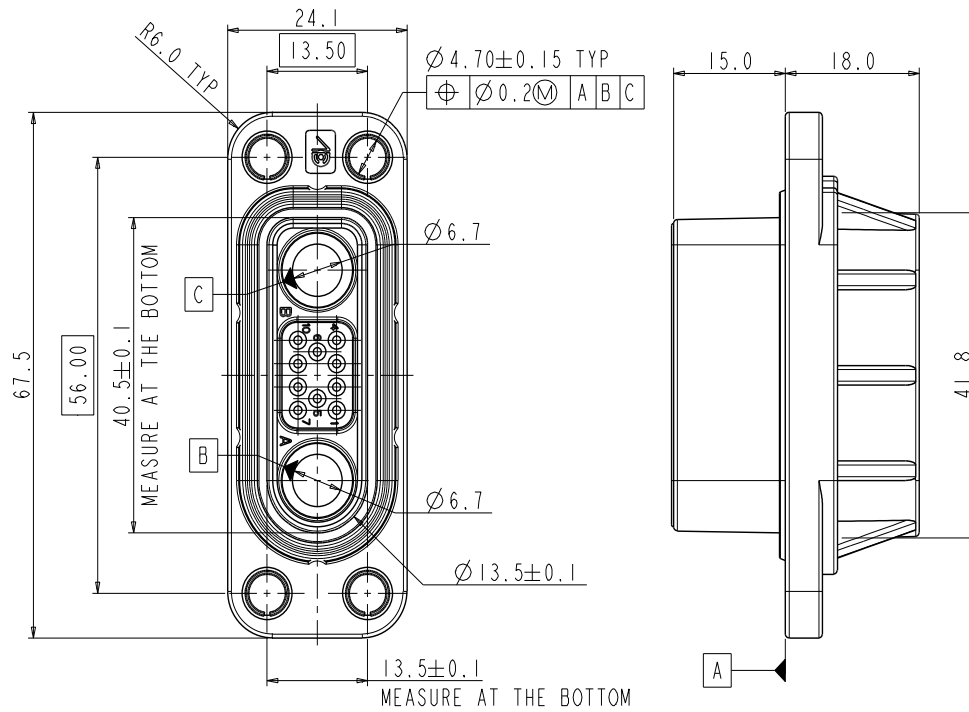


PANEL MOUNTING DIMENSIONS

REAR MOUNTING PANEL RECOMMENDATION

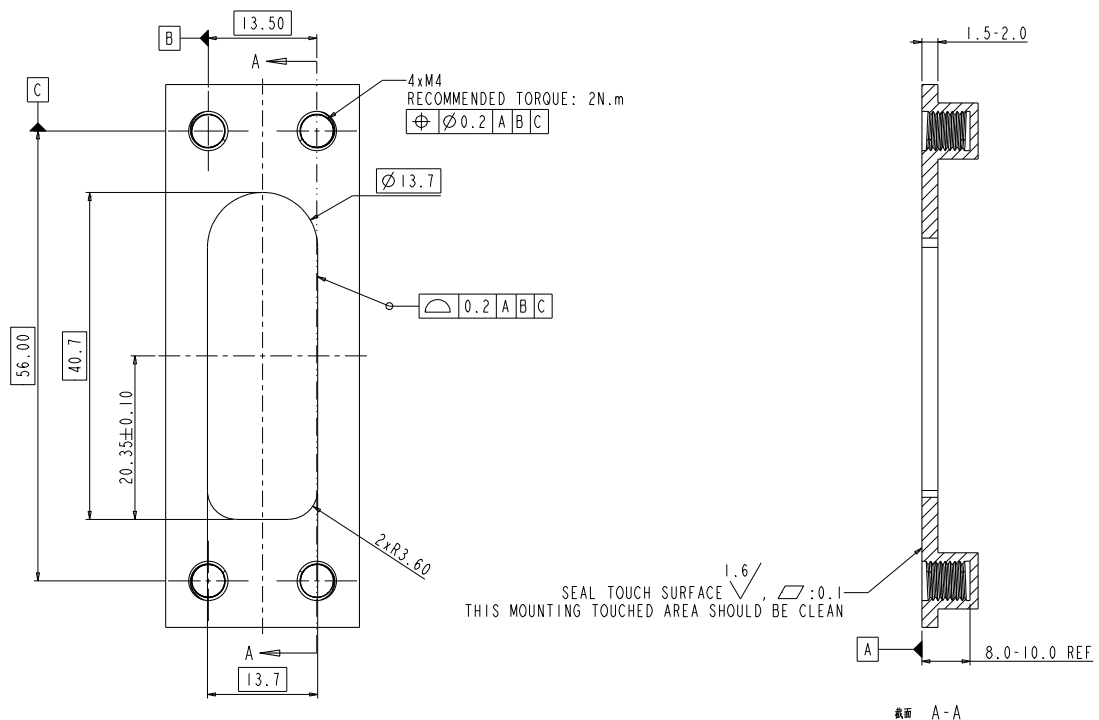


PLUG
P/N: HEV060AM2P10SW

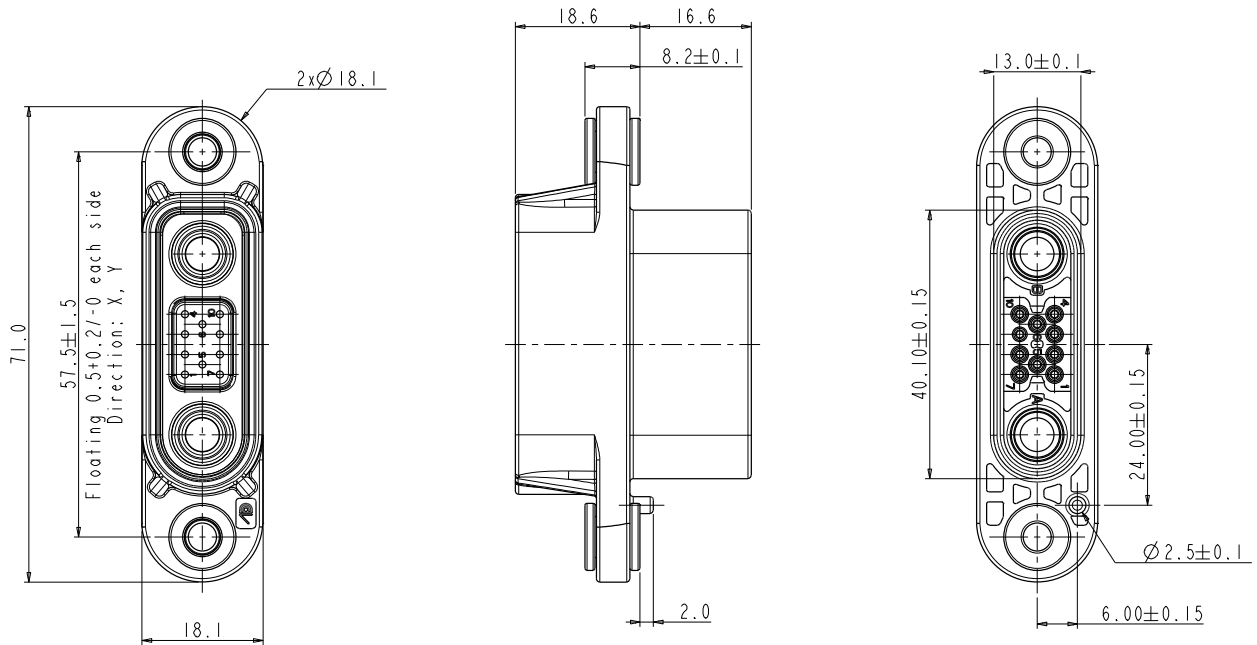

PANEL MOUNTING DIMENSIONS

FRONT MOUNTING PANEL RECOMMENDATION

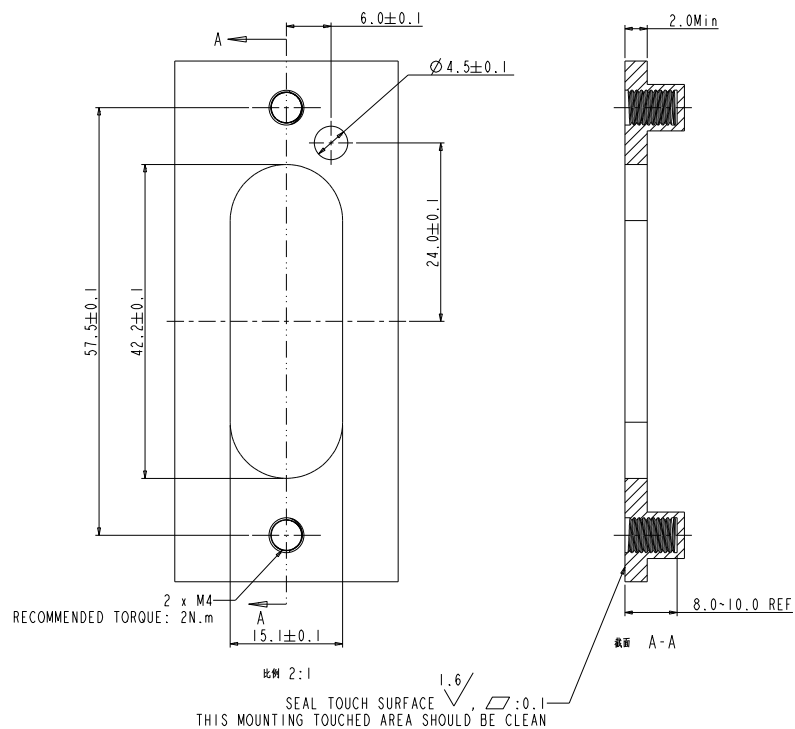

NOTE: CONNECTORS AND MOUNTING PANELS ARE NOT WATERPROOF