

HVPT B PASS-THROUGH



KEY FEATURES

- 2 & 3 positions available
- Light in weight with plastic shell
- Easy to install, reliable connection
- Sealing, IP67 & IP6K9K (mated)
- Multiple coding positions
- 360° shielded from wire to device
- Economical

MECHANICAL

Wire range	25 to 70 mm ² shielded wires
Connection type	Crimping

ELECTRICAL

Rated voltage	1000V DC
Dielectric withstand voltage	3000V AC
Shielding	360° from wire to device

ENVIRONMENTAL

Sealing	IP67 , IP6K9K
Temperature range	-40°C to 125°C


STANDARDS

USCAR-2
USCAR-37
RoHS

MATERIAL

Housing	PA66 + GF
---------	-----------


HVPTB 2 POSITION PASS-THROUGH

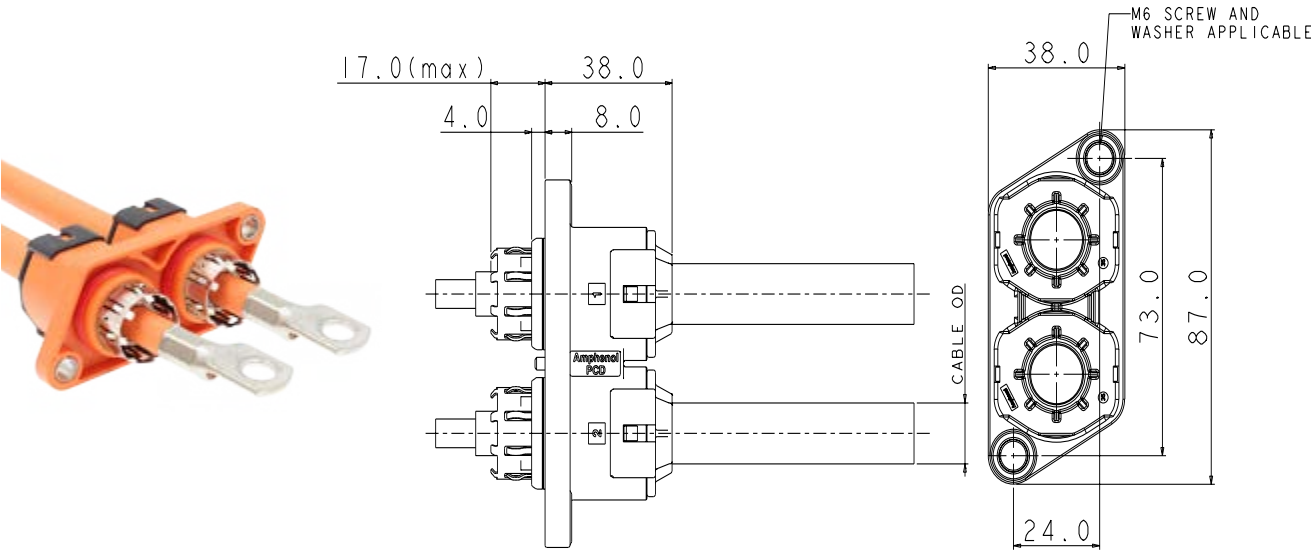


PART NUMBER

Part number	Conductor cross section (mm ²)	Cable OD
HVPTB 2 B 70	70	19.0±0.3
HVPTB 2 B 50	50	16.5±0.3
HVPTB 2 B 35	35	14.2±0.3
HVPTB 2 B 25	25	11.9±0.3

PANEL MOUNTING DIMENSIONS

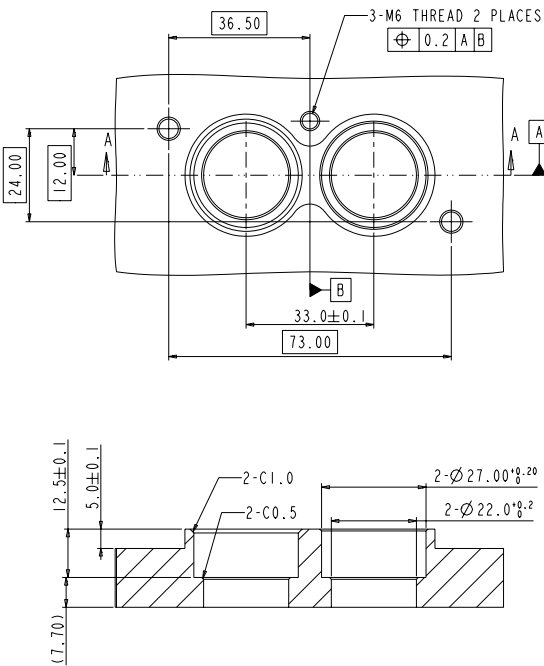

HVPTB 3 POSITION PASS-THROUGH

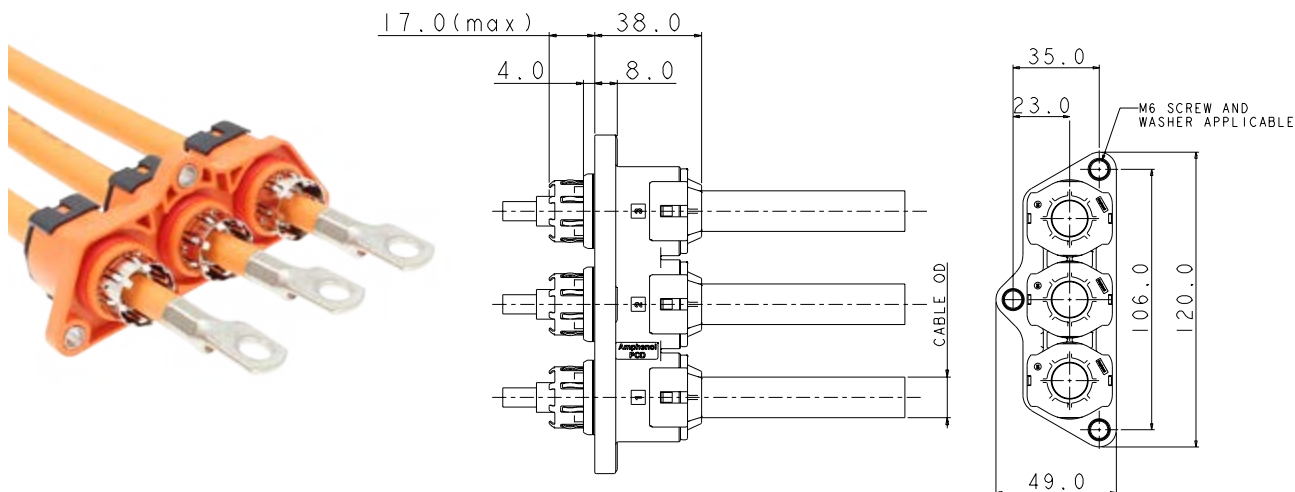

PART NUMBER

Part number	Conductor cross section (mm ²)	Cable OD
HVPTB 3 N 70	70	19.0±0.3
HVPTB 3 N 50	50	16.5±0.3
HVPTB 3 N 35	35	14.2±0.3
HVPTB 3 N 25	25	11.9±0.3

PANEL MOUNTING DIMENSIONS

