

HVSL635B



Applicable to High Power Auxiliaries

Specifications

Rated current:	40A @ ambient temperature 70°
Rated voltage:	690V
Interlock:	HVIL
Waterproof (mated):	IP67, IP6K9K
Touch-proof (unmated):	IP2XB
Ambient temperature:	-40 to 70°C
Mating cycles:	50 cycles
Shielding:	Yes
Substitute for:	TE HVP630
Version available:	Crimping version
Cable type:	Multicore cable (LV 216-2)
Wire range:	2.5, 4, 6mm ²
Outer diameter:	5 x 2.5mm ² : 12.1 +0/-0.6mm 5 x 4mm ² : 14.5 +0/-0.6mm 4 x 6mm ² : 12.9 +0.4/-0.4mm 5 x 6mm ² : 16.3 +0/-0.6mm



Plug

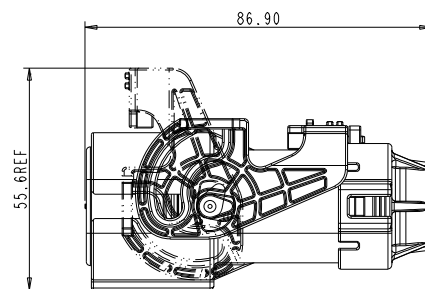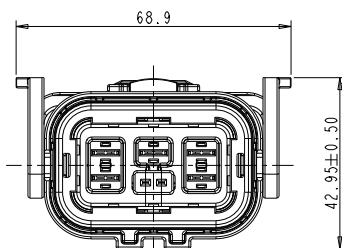

Receptacle

