


SHQD30 Ball Valve Quick Coupling **Datasheet**




Part Number	Thread Termination: ZH-796642-SHQD30 ZH-796643-SHQD30 Sanitary Flange: ZH-796644-SHQD30 ZH-796645-SHQD30
Size	2"
Rated Flow Rate	800L/min
Resistance	See flow rate Curve
Body Material	Stainless Steel
Sealing	EPDM
Interlok pin	Stainless Steel
Latch	Stainless Steel
Ball Valve	Stainless Steel
Spring	Stainless Steel
Interlok ball	Stainless Steel
Valve washer	Nylon
Working Temperature(°C)	-40°C~85°C
Working Pressure	0-1Mpa
Max.working Pressure	2MPa
Life Cycle	1000 Min.
Termination	Thread or Sanitary Flange (Other options can be customized)
InterLok System	Prevent valve to be open while uncoupled
Max. Outer Diameter (mm)	105.3mm
Dust Cap	Available
Applicant Coolant	Deionized water, Ethylene glycol, Propylene glycol, etc.
Fluid Loss(cc.)	12
Drawing&3D	Available

Thread Termination Version:

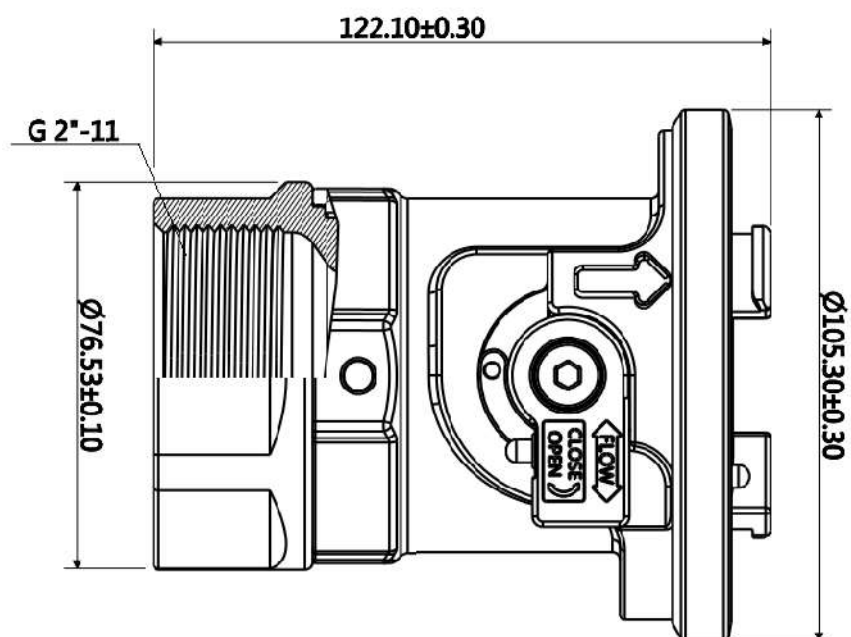

Sanitary Flange Version:

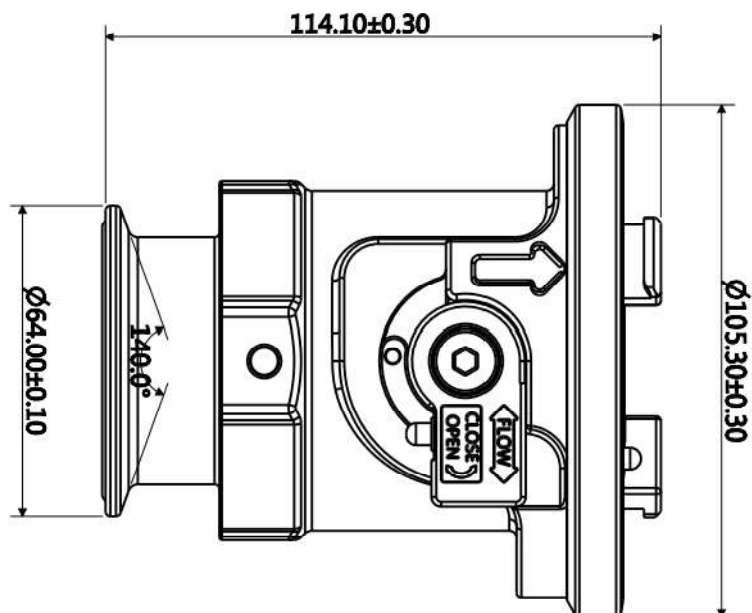

Flow Rate Vs Resistance

