



Rising Clamp System

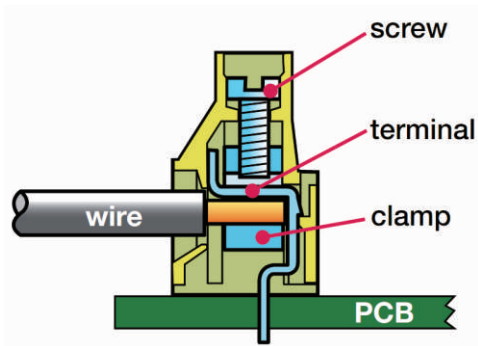


B

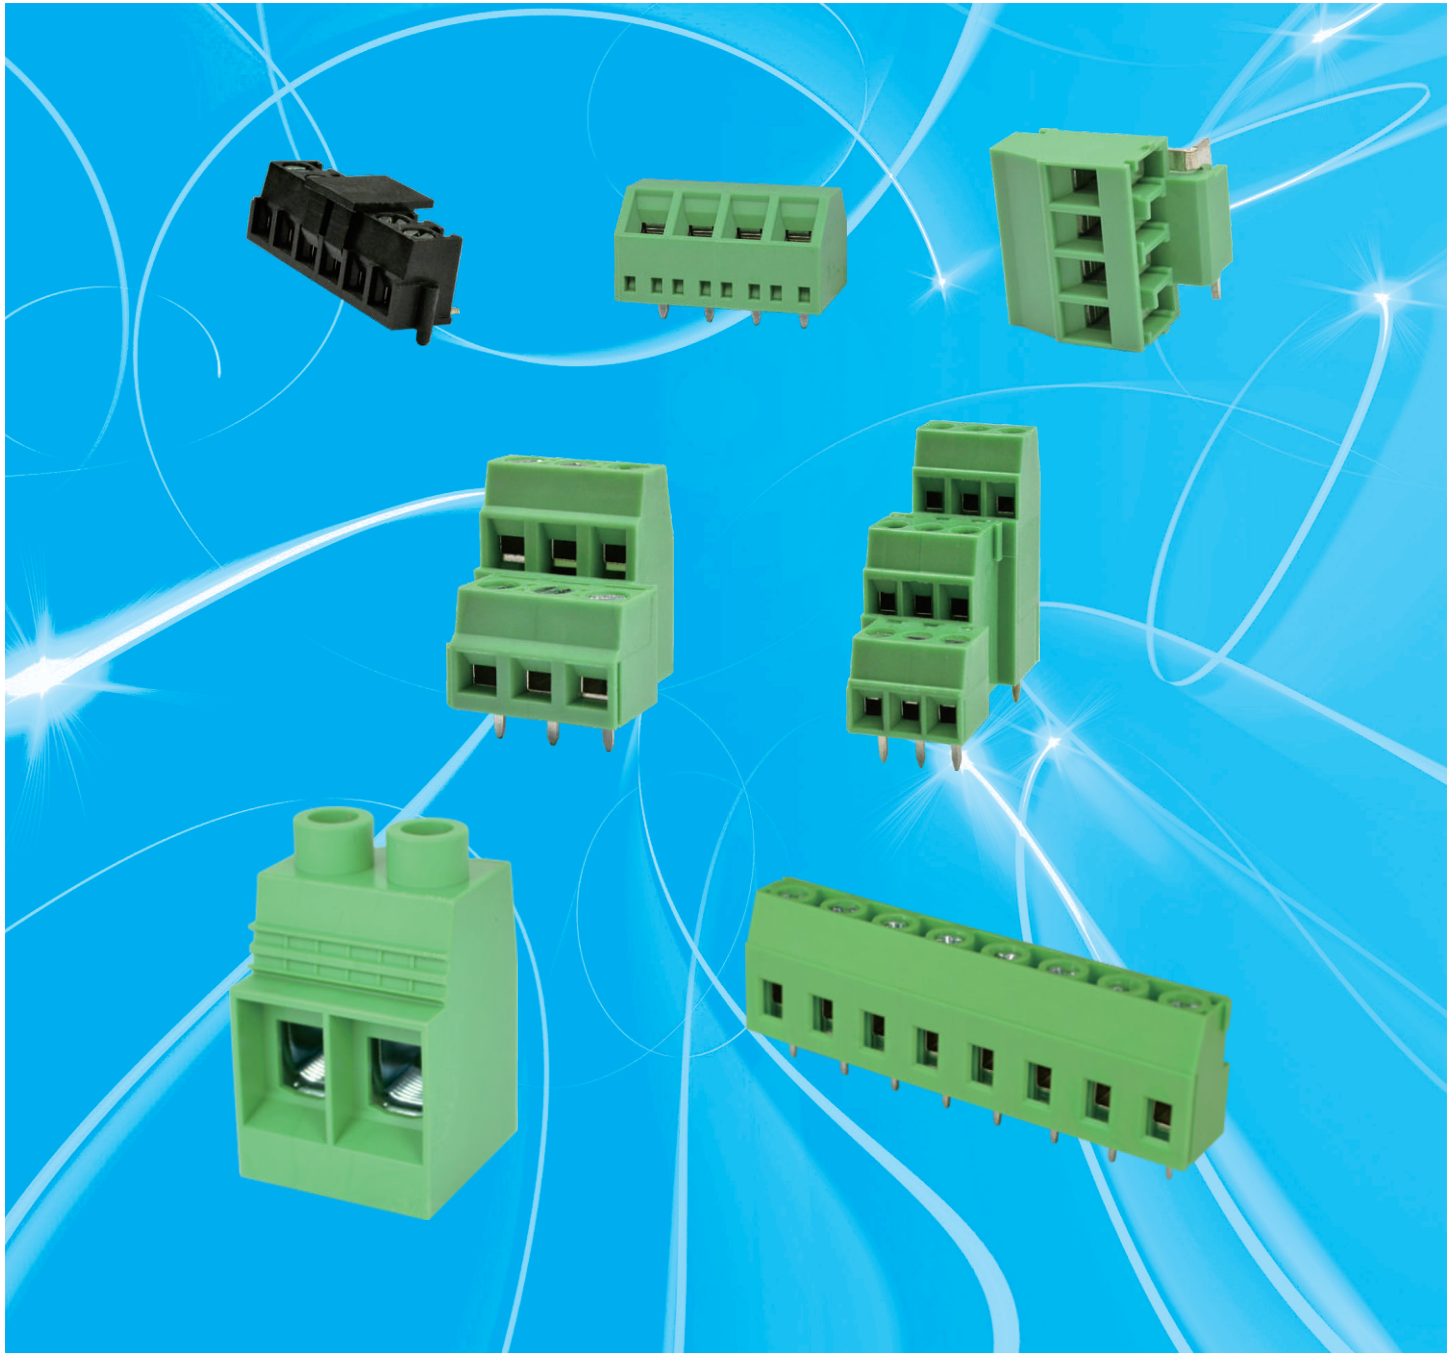

Pitch: 2.54, 3.5, 3.81, 4.5, 5.0, 5.08, 6.35, 7.5, 7.62, 9.52, 10.16, 12.7, 15.0, 15.24, 17.5, 19.0
Rated Voltage Range(cULus): 150V-1000V
Rated Current Range(cULus): 6A-160A

VN

Pitch 2.54mm
Solid block
Poles 2p~24p
VNxxA1500000G*
Number of poles

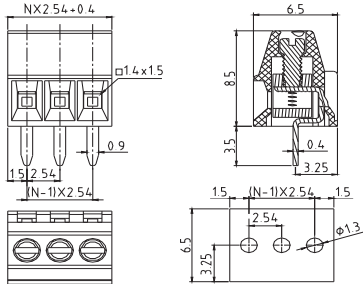


Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	18-30
Stranded wire(AWG):	18-30
Torque(Lb-In) :	1.3

Screw:	M1.6
Wire strip length:	4-5mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

ER

Pitch 3.5mm
90D wire inlet
Poles 2p/3p
ERxx01510000G*
Number of poles

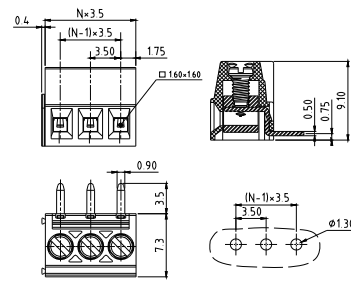


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ER

Pitch 3.5mm
180D wire inlet
Poles 2p/3p
ERxx01500000G*
Number of poles

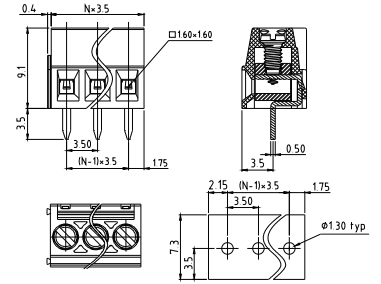


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YO

Pitch 3.5mm
1st-Level/Solid block
Poles 2p~24p
YOxx01500000G*
Number of poles

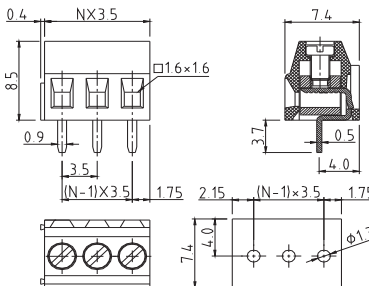


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	10A	12A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-24	
Stranded wire(AWG):	16-24	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 1.5KV
Safety Approval:	cULus TÜV

YO

Pitch 3.81mm
1st-Level/Solid block
Poles 2p~24p
YOxx21500000G*
Number of poles

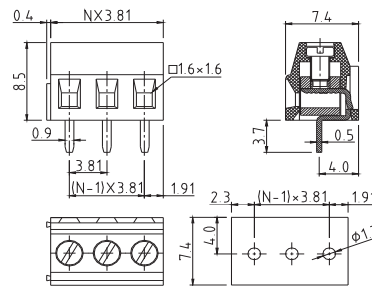


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	10A	12A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-24	
Stranded wire(AWG):	16-24	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 1.5KV
Safety Approval:	cULus TÜV

TV

Pitch 3.5mm
Solid block
Poles 2p~24p
TVxx11500000G*
Number of poles

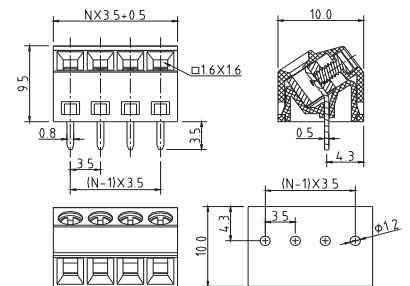


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TV

Pitch 3.81mm
Solid block
Poles 2p~24p
TVxx31500000G*
Number of poles

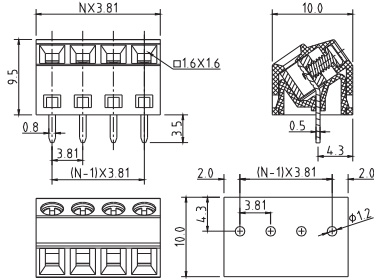


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TV

Pitch 5.0mm
Solid block
Poles 2p~24p
TVxx51500000G*
Number of poles

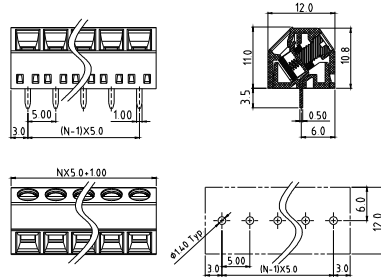


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Torque(Lb-In):	3.5

Screw:	M3.0
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YP

Pitch 3.5mm
2nd-Level/Solid block
Poles 2p~24p(Insert hole:1.6x1.6mm)
YPxx01500000G*
Number of poles

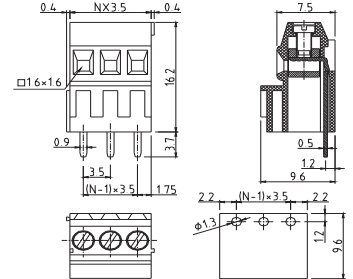


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YP

Pitch 3.81mm
2nd-Level/Solid block
Poles 2p~24p(Insert hole:1.6x1.6mm)
YPxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YP

Pitch 3.81mm
High type(2nd-Level/Solid block)
Poles 2p~24p(Insert hole:2.1x2.2mm)
YPxx2150A000G*
Number of poles

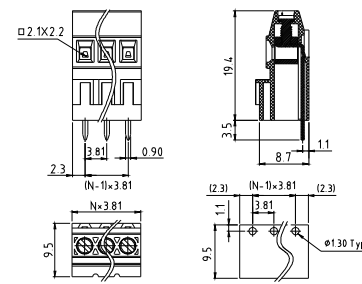


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VQ

Pitch 3.5mm
Dip solder/Solid block
Poles 2p~24p
VQxx11500000G*
Number of poles

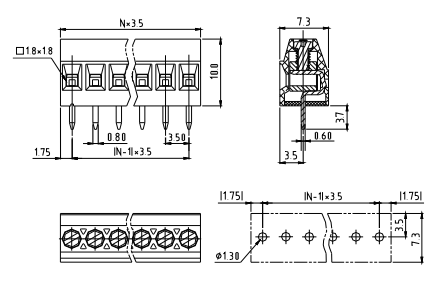


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VQ


Pitch 3.81mm
Dip solder/Solid block
Poles 2p~24p
VQxx3150000G*
Number of poles

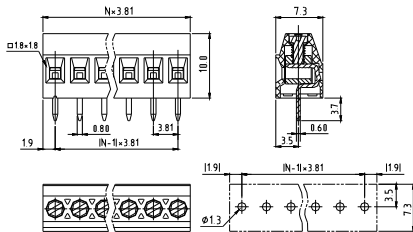

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VQ


Pitch 3.5mm
Press fit/Solid block
Poles 2p~24p
VQxx11510000G*
Number of poles

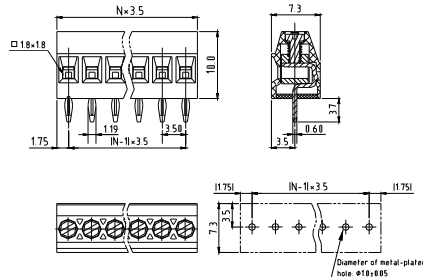

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7
Diameter of metal-plated hole:	Φ1.0
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VQ


Pitch 3.81mm
Press fit/Solid block
Poles 2p~24p
VQxx31510000G*
Number of poles

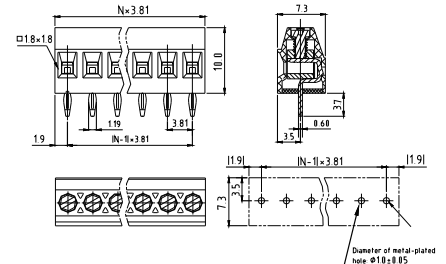

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7
Diameter of metal-plated hole:	Φ1.0
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ


Pitch 3.5mm-L
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx01500000G*
Number of poles

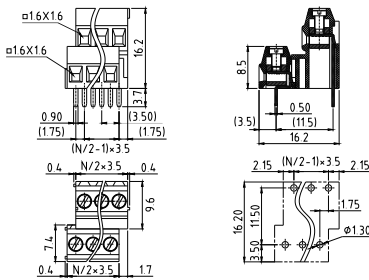

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ


Pitch 3.5mm-R
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx21500000G*
Number of poles

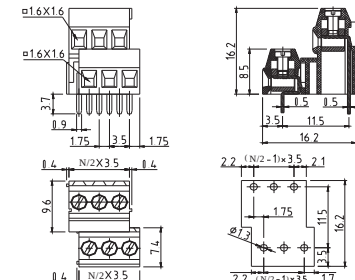

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ

Pitch 3.81mm-L
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx41500000G*
Number of poles

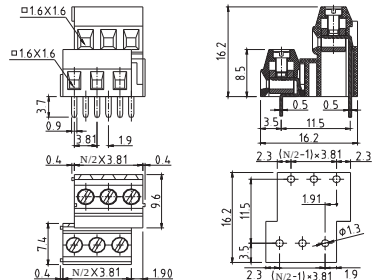


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7
Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ




Pitch 3.81mm-L
Double level(ED+YP) High type
Poles 2*2p~2*24p(Insert hole:2.1x2.2mm)
YQxx4150A000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YQ

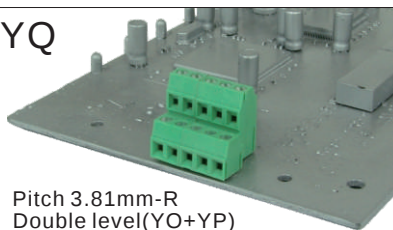

Pitch 3.81mm-R
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx6150000G*
Number of poles

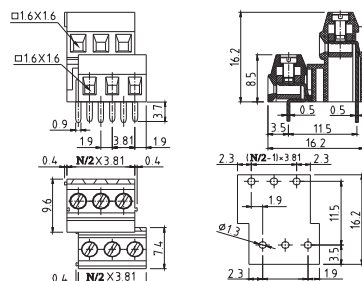


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YQ




Pitch 3.81mm-R
Double level(ED+YP) High type
Poles 2*2p~2*24p(Insert hole:2.1x2.2mm)
YQxx6150A000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YA

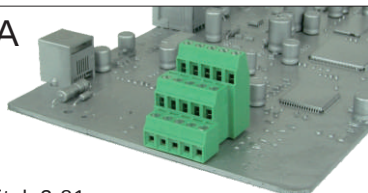


Pitch 3.81mm
Solid block
Poles 15p(5*3)Only
YA152150000G*
Number of poles

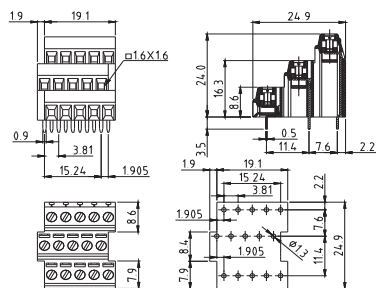


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	(cULus) pending

YA

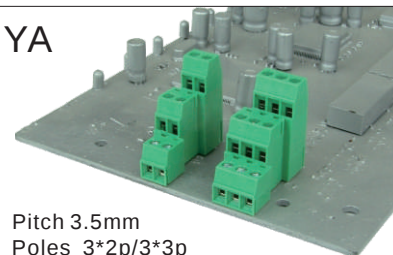


Pitch 3.5mm
Poles 3*2p/3*3p
YAxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

YA

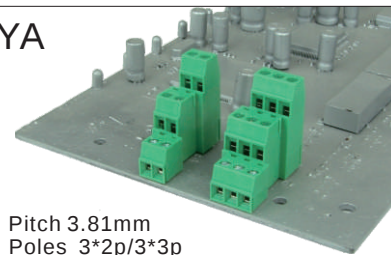


Pitch 3.81mm
Poles 3*2p/3*3p
YAxx21510000G*
Number of poles

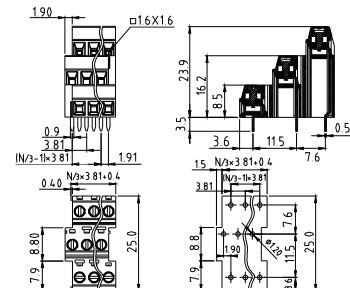


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

TZ



Pitch 3.5mm
Poles 2p~16p
SMT type(W/O pillar)
TZxx2103B000G*
Number of poles

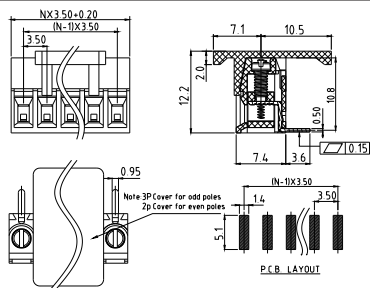


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TZ




Pitch 3.5mm
Poles 2p~16p
SMT type(With pillar)
TZxx2101B000G*
Number of poles

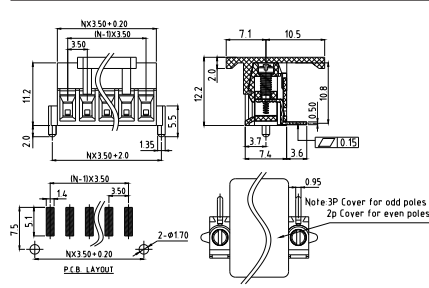


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TZ

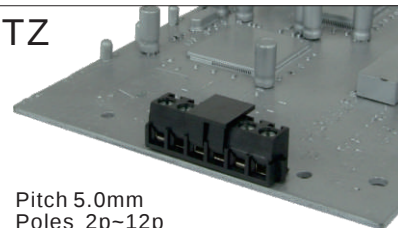


Pitch 5.0mm
Poles 2p~12p
SMT type(With pillar)
TZxx0101B000G*
Number of poles

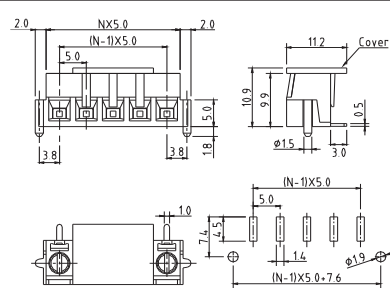


Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ED

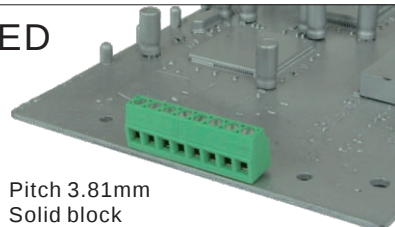


Pitch 3.81mm
Solid block
Poles 2p~24p
EDxx31500000G*
Number of poles

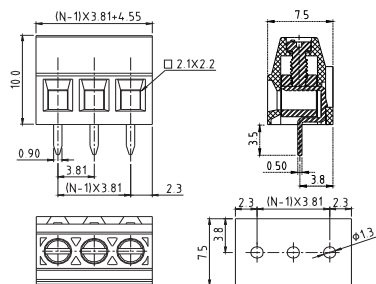


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	2.17

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

K6




Pitch 4.5mm
Poles 2p~24p
K6xx01500000G*
Number of poles

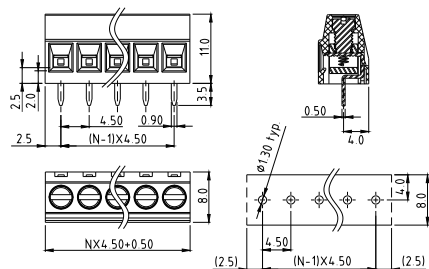


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	2.7

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ES

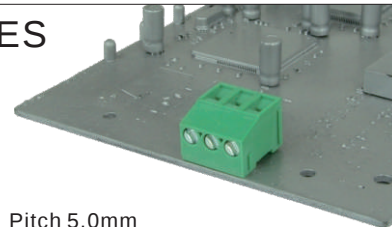


Pitch 5.0mm
Poles 2p/3p
ESxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

E6

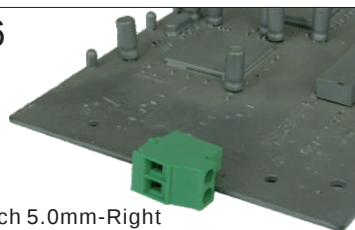


Pitch 5.0mm-Right
Poles 2p
E60201500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Left
Poles 2p
E602015100000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Right
Poles 3p
E60301500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6

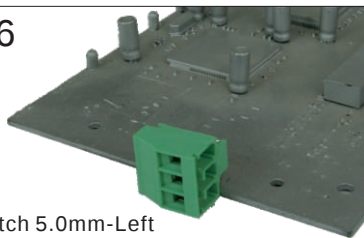


Pitch 5.0mm-Left
Poles 3p
E603015100000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Right
Poles 4p
E604015100000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Left
Poles 4p
E604015100000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EQ

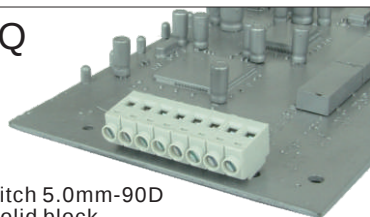

Pitch 5.0mm-90D
Solid block
Poles 2p~24p
EQxx0580000G*
Number of poles

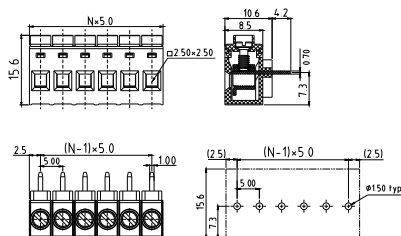


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EQ



Pitch 5.0mm-180D
Solid block
Poles 2~24p
EQxx05810000G*
Number of poles

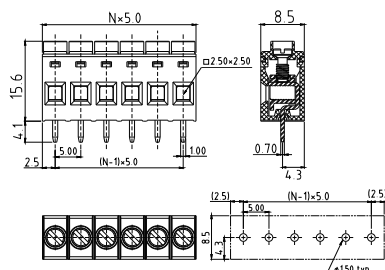


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TO




Pitch 5.0mm
Poles 2p/3p
TOxx01520000G*
Number of poles

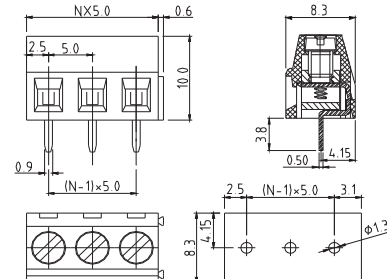


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	10A
Wire range:		0.5 - 1.5mm ²
Solid wire(AWG):	16-26	
Stranded wire(AWG):	16-26	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

TO

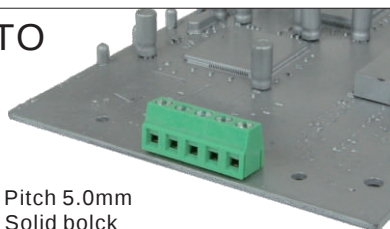


Pitch 5.0mm
Solid block
Poles 4p~24p
TOxx01510000G*
Number of poles

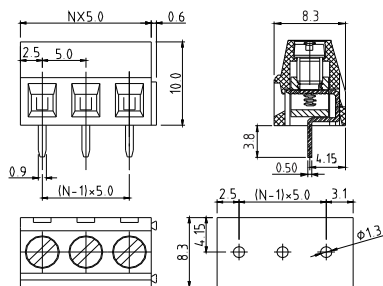


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V3

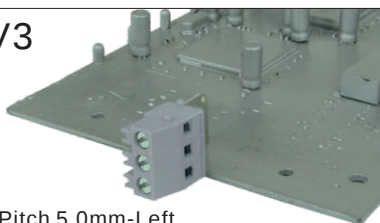


Pitch 5.0mm-Left
Poles 3p only
V3030180000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

V3

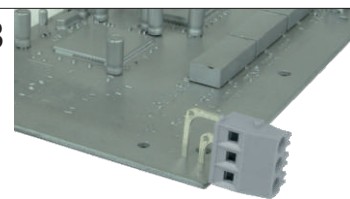

Pitch 5.0mm-Right
Poles 3p only
V30301810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5


Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

Rising Clamp System

T2

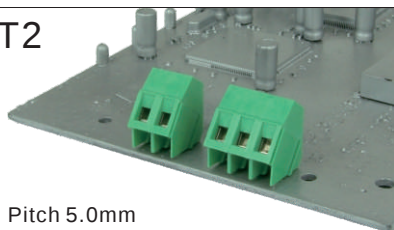


Pitch 5.0mm
Poles 2p/3p
T2xx01500000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

T2

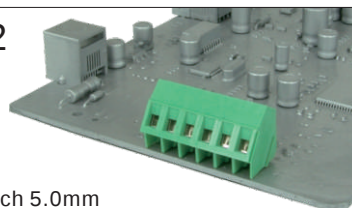


Pitch 5.0mm
Solid block
Poles 4p~24p
T2xx01510000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

T2




Pitch 5.08mm
Solid block
Poles 2p~24p
T2xx21510000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YD

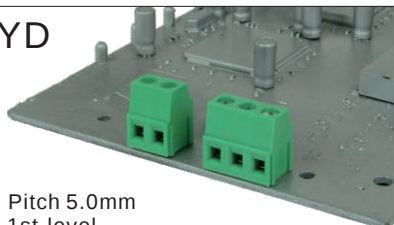


Pitch 5.0mm
1st-level
Poles 2p/3p
YDxx01500000G*
Number of poles

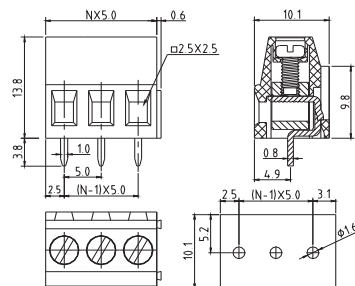


Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YD

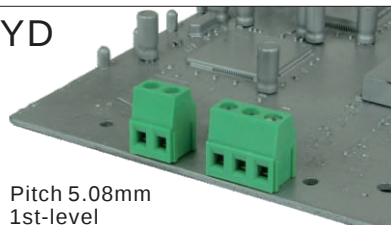


Pitch 5.08mm
1st-level
Poles 2p/3p
YDxx21500000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YF

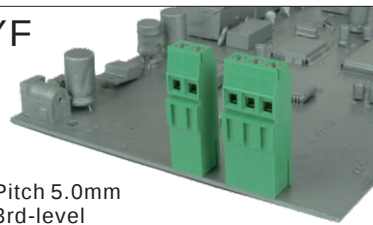

Pitch 5.0mm
3rd-level
Poles 2p/3p
YFxx01500000G*
Number of poles

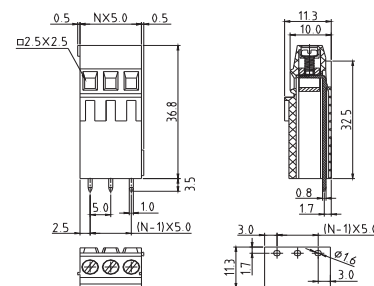


Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	UL

YF

Pitch 5.08mm
3rd-level
Poles 2p/3p
YFxx21500000G*
Number of poles

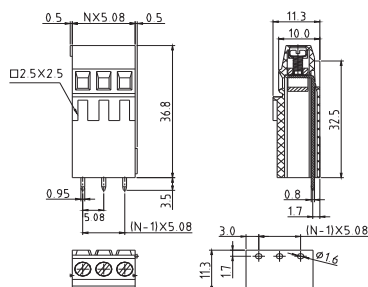


Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE

Pitch 5.0mm
2nd-level
Poles 2p/3p
YExx01500000G*
Number of poles

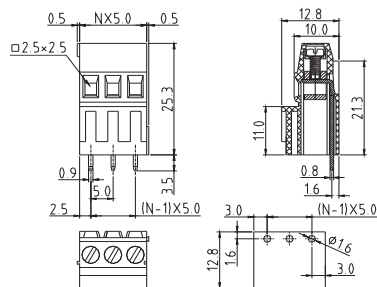


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE

Pitch 5.0mm
2nd-level Solid block
Poles 4p~24p
YExx01510000G*
Number of poles

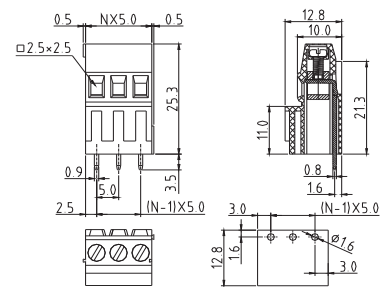


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE

Pitch 5.08mm
2nd-level
Poles 2p/3p
YExx21500000G*
Number of poles

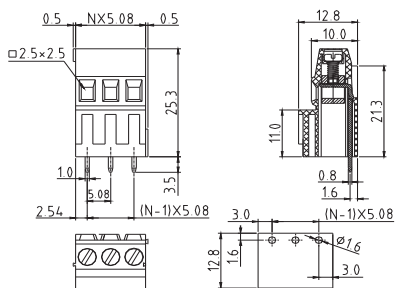


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE

Pitch 5.08mm
2nd-level Solid block
Poles 4p~24p
YExx21510000G*
Number of poles

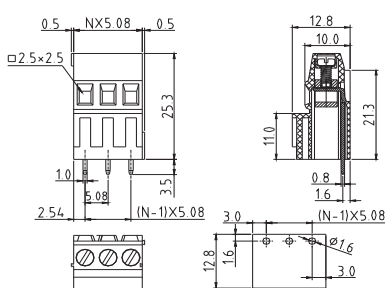


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TG

Pitch 5.0mm
Long interlock
Poles 2p/3p
TGxx0160B000G*
Number of poles

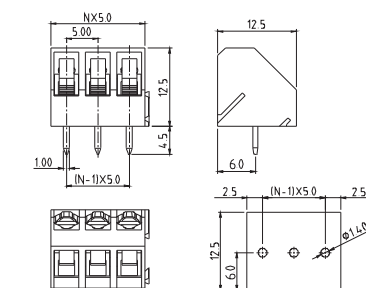


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	15A	10A
Wire range:	0.34-4.0mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

TG

Pitch 5.0mm
Long interlock(Solid block)
Poles 4p~24p
TGxx0160C000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TG

Pitch 5.08mm
Long interlock
Poles 2p/3p
TGxx5160B000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	15A	10A
Wire range:		0.34-4.0mm ²
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2KV
Safety Approval:	cULus VDE

YR

Pitch 5.0mm
Poles 2p~24p
YRxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YR

Pitch 5.08mm
Poles 2p~24p
YRxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YG

Pitch 5.0mm
Poles 2p~24p
YGxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YG

Pitch 5.08mm
Poles 2p~24p
YGxx21510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YS

Pitch 5.0mm
Double level
Poles 4p(2*2),6p(2*3)
YSxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3.0
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YS

Pitch 5.08mm
Double level
Poles 4p(2*2),6p(2*3)
YSxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3.0
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL

Pitch 5.0mm-L
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx01500000G*
Number of poles

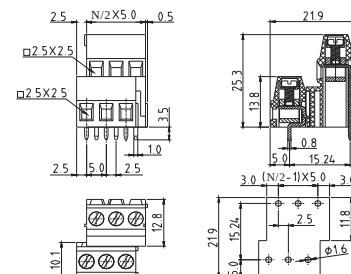


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL

Pitch 5.0mm-R
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx21500000G*
Number of poles

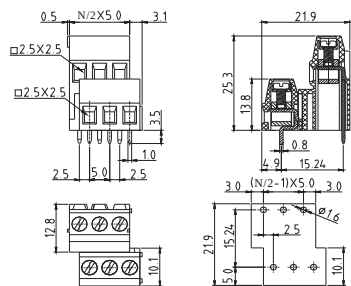


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL

Pitch 5.08mm-L
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx41500000G*
Number of poles

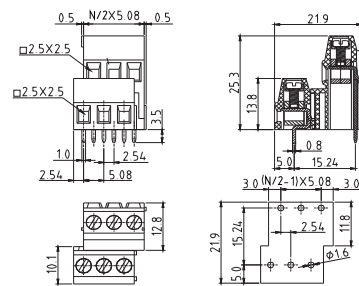


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL


Pitch 5.08mm-R
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx61500000G*
Number of poles

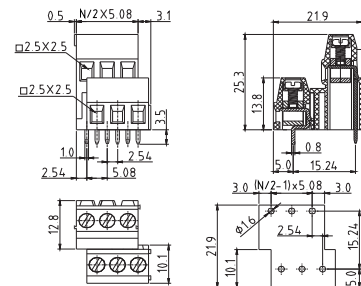


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL

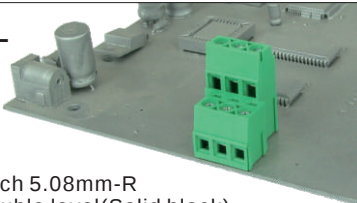


Pitch 5.08mm-R
Double level(Solid block)
Poles 4P(2*2),6P(2*3)
YLxx61510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	5.0

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YM

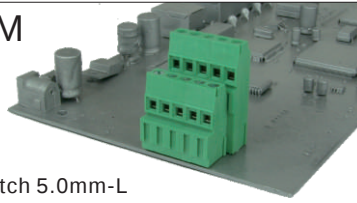


Pitch 5.0mm-L
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YM

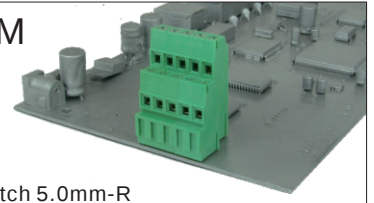


Pitch 5.0mm-R
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx21500000G*
Number of poles

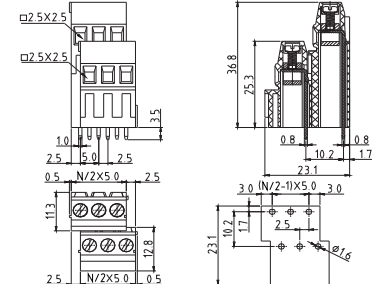


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YM

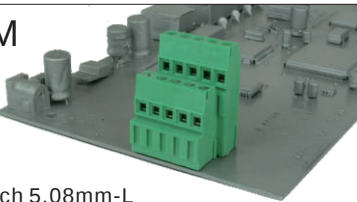


Pitch 5.08mm-L
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx41500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YM

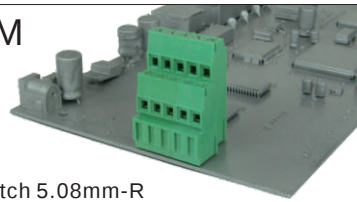


Pitch 5.08mm-R
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx61500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EB

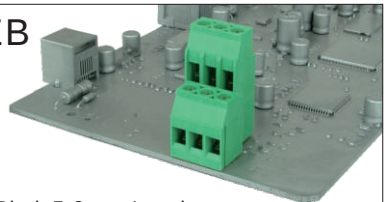


Pitch 5.0mm-Interlace
Poles 2*2p/2*3p
EBxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EB

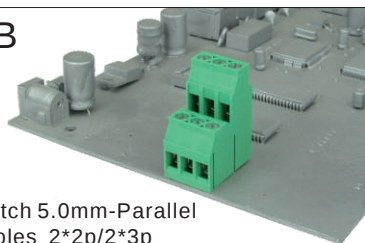


Pitch 5.0mm-Parallel
Poles 2*2p/2*3p
EBxx01530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EB

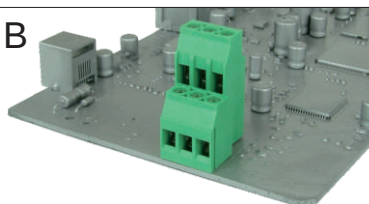


Pitch 5.08mm-Interlace
Poles 2*2p/2*3p
EBxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EB

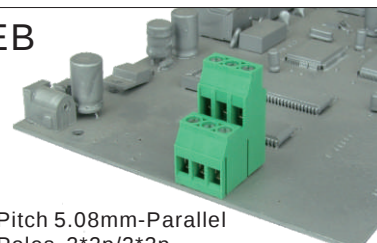


Pitch 5.08mm-Parallel
Poles 2*2p/2*3p
EBxx21530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YN

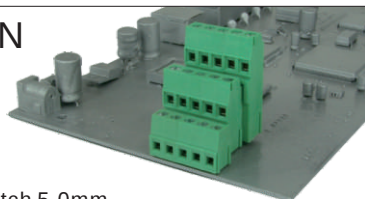


Pitch 5.0mm
Triple level(YD+YE+YF)
Poles 6p(3*2),9p(3*3)
YNxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YN

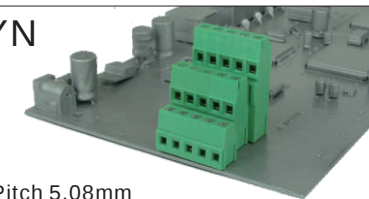


Pitch 5.08mm
Triple level(YD+YE+YF)
Poles 6p(3*2),9p(3*3)
YNxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YH

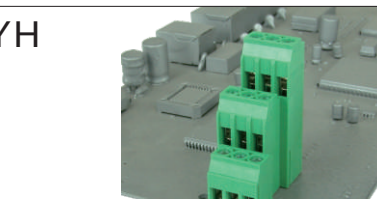


Pitch 5.0mm
Poles 3*2p/3*3p
YHxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YH




Pitch 5.08mm
Poles 3*2p/3*3p
YHxx21510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YT

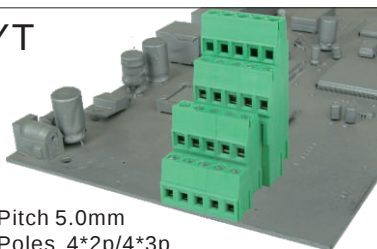


Pitch 5.0mm
Poles 4*2p/4*3p
YTxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YT

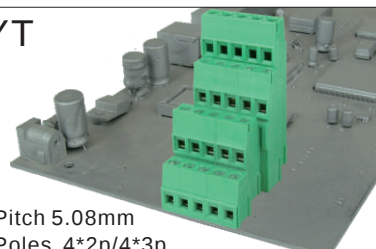


Pitch 5.08mm
Poles 4*2p/4*3p
YTxx21500000G*
Number of poles

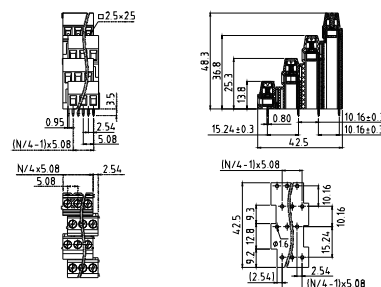


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YI




Pitch 5.0mm
Poles 4*2p/4*3p
YIxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	pending

YI




Pitch 5.08mm
Poles 4*2p/4*3p
YIxx21510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	pending

VI

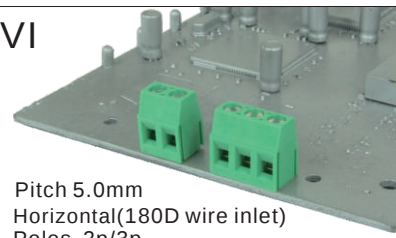

Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 2p/3p
VIxx01520000G*
Number of poles

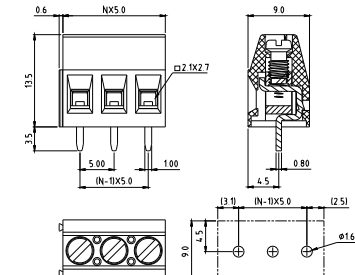


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	2.0KV	
Safety Approval:			

VI

Pitch 5.0mm
Vertical(90D wire inlet)
Poles 2p/3p
Vlxx01500000G*
Number of poles

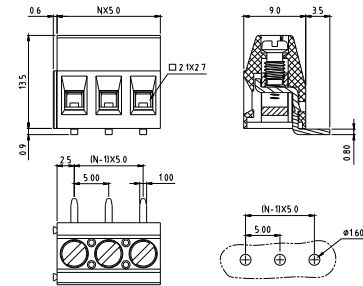


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	

VI

Pitch 5.08mm
Horizontal(180D wire inlet)
Poles 2p/3p
Vlxx21520000G*
Number of poles

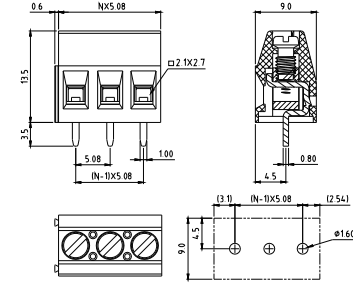


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	

VI

Pitch 5.08mm
Vertical(90D wire inlet)
Poles 2p/3p
Vlxx21500000G*
Number of poles

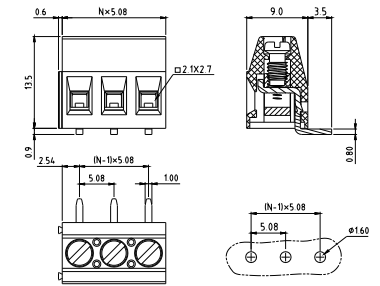


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	

VI

Pitch 5.08mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~24p
Vlxx21530000G*
Number of poles

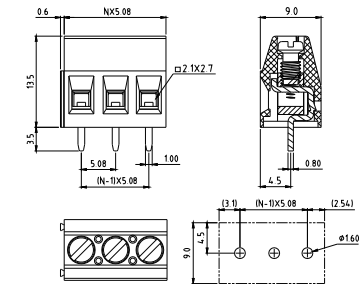


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	

VI

Pitch 5.08mm
Solid block
Vertical(90D wire inlet)
Poles 4p~24p
Vlxx21530000G*
Number of poles

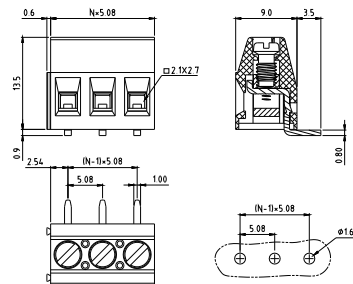


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	

VI

Pitch 7.5mm
Horizontal(180D wire inlet)
Poles 2p/3p
Vlxx41520000G*
Number of poles

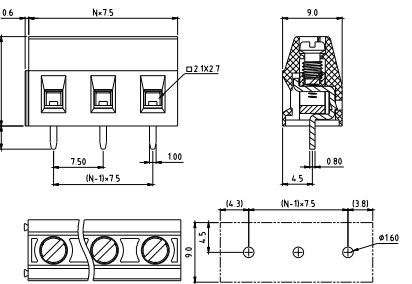


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VI

Pitch 7.5mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx4150000G*
Number of poles

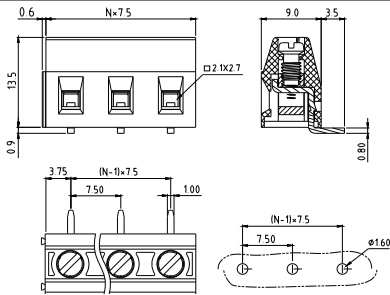


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VJ

Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx01520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VJ

Pitch 5.0mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~24p
VJxx01550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VJ

Pitch 5.0mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx01500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VJ

Pitch 5.0mm
Solid block
Vertical(90D wire inlet)
Poles 4p~24p
VJxx01530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VJ


Pitch 5.08mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx21520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VJ

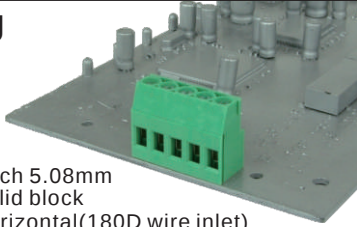


Pitch 5.08mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~24p
VJxx21550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	 

VJ

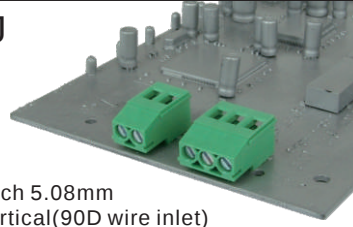


Pitch 5.08mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx21550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	 

VJ

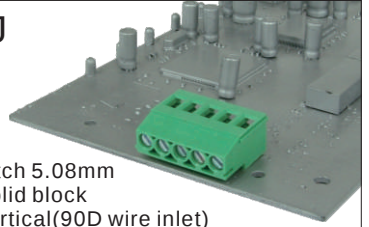


Pitch 5.08mm
Solid block
Vertical(90D wire inlet)
Poles 4p~24p
VJxx21530000G*
Number of poles

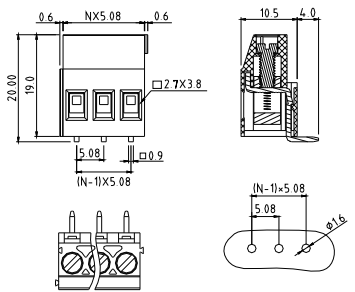


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	 

VJ

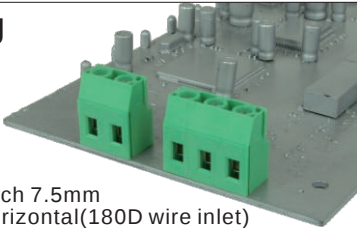


Pitch 7.5mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx41520000G*
Number of poles

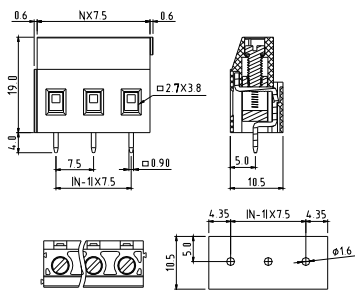


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	 

VJ

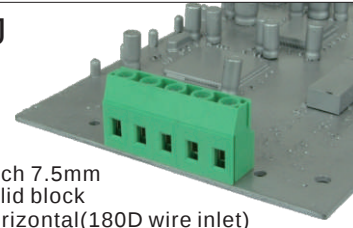


Pitch 7.5mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~16p
VJxx41550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	 

VJ

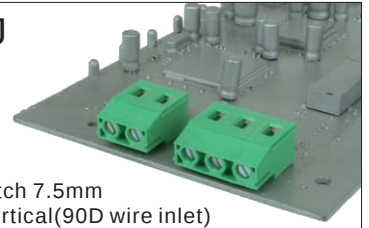


Pitch 7.5mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx41550000G*
Number of poles

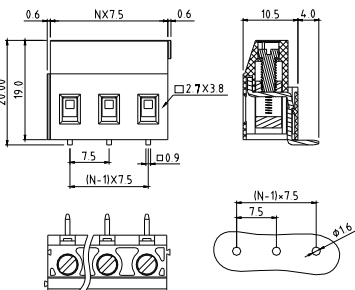


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	 

VJ

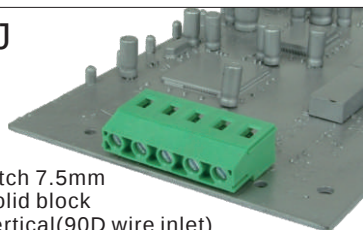


Pitch 7.5mm
Solid block
Vertical(90D wire inlet)
Poles 4p~16p
VJxx41530000G*
Number of poles

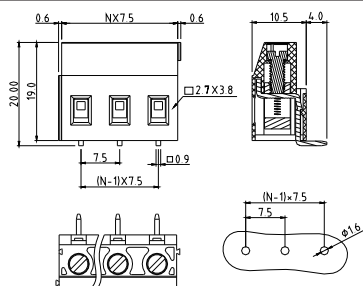


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

VJ




Pitch 7.62mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx61520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

VJ




Pitch 7.62mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~16p
VJxx61550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

VJ

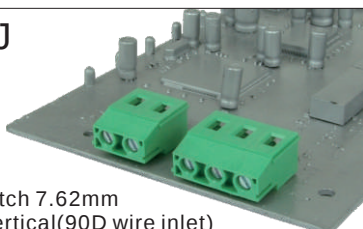


Pitch 7.62mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx61500000G*
Number of poles

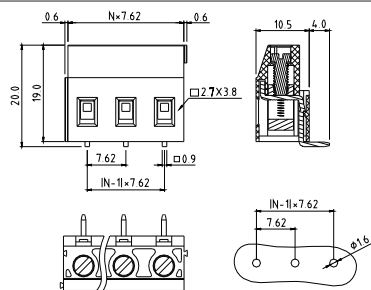


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

VJ

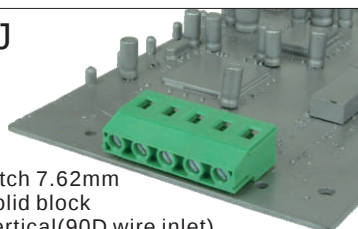

Pitch 7.62mm
Solid block
Vertical(90D wire inlet)
Poles 4p~16p
VJxx61530000G*
Number of poles

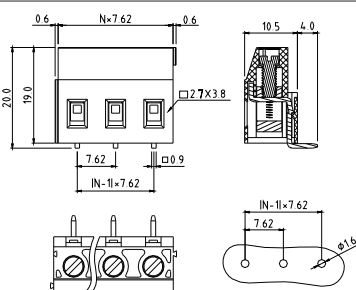


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

VJ




Pitch 7.62mm(180D wire inlet)
Low profile type(W/O cover)
Poles 2p~16p
VJxx6055TxxxG*
Number of poles

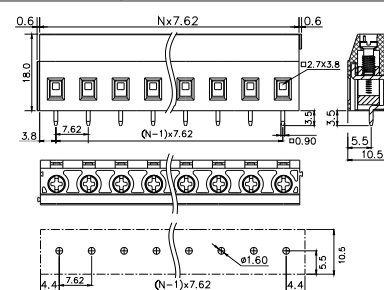


Electrical:	cULus	
Voltage rating:	300V	
Current rating:	20A	
Wire range:		
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque (Lb-In):	3.5	

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	
Safety Approval:	

TI

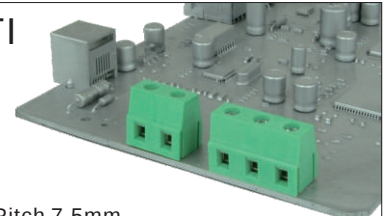

Pitch 7.5mm
Poles 2p/3p
Tlxx21500000G*
Number of poles

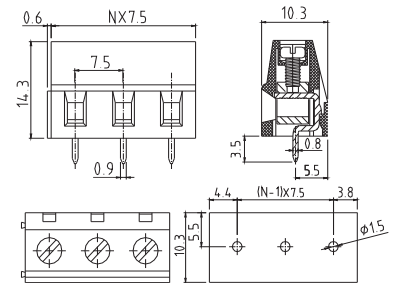


Electrical:	CQC	UL	VDE
Voltage rating:	450V	300V	450V
Current rating:	24A	16A	10A
Wire range:	0.2-2.5mm ²	0.34-4.0mm ²	
Solid wire(AWG):	12-22		
Stranded wire(AWG):	12-22		
Torque :	0.4N.m	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	6-7mm	
Withstanding Voltage:	2.5KV	1.6KV 2.5KV
Safety Approval:		 

EK



Pitch 5.08mm
Poles 2p/3p
EKxx21500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	15A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque:	4.3 Lb-In	0.57N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	ULus 

TU

Pitch 5.08mm
Poles 2p/3p
TUxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YC

Pitch 5.08mm
Poles 2p/3p
YCxx21500000G*
Number of poles

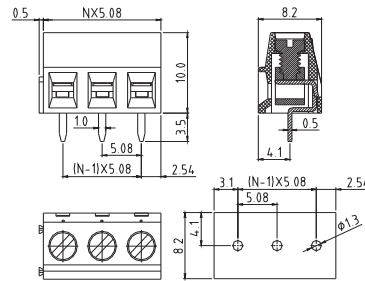


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VT

Pitch 5.08mm
Poles 1p~12p
VTxx21800000G*
Number of poles

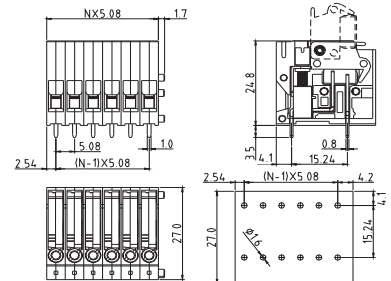


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YB

Pitch 5.08mm
Solid block
Poles 6p(3*2),9p(3*3)
YBxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VV

Pitch 6.35mm
Double level
Poles 4p(2*2),6p(2*3)
VVxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In) :	5.2

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VV


Pitch 9.52mm
Double level
Poles 4p(2*2),6p(2*3)
VVxx21500000G*
Number of poles

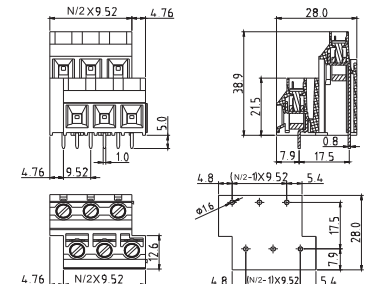


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In) :	5.2

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

T7

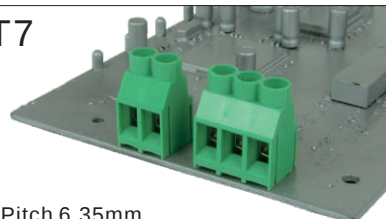


Pitch 6.35mm
Poles 2p/3p
T7xx03500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	

T7

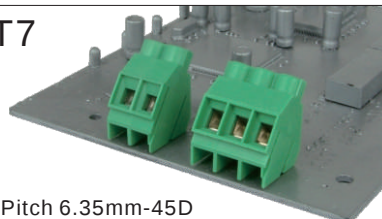

Pitch 6.35mm-45D
Poles 2p/3p
T7xx03510000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	

T7-New type




Pitch 7.62mm
Poles 2p~16p
T7xx465A0000G*
Number of poles

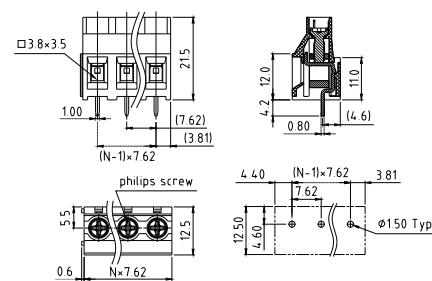


Electrical:	cULus
Voltage rating:	300V
Current rating:	32A
Wire range:	
Solid wire:	10-30AWG
Stranded wire:	10-30AWG

Torque :	8.9Lb-In
Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	() pending

T7

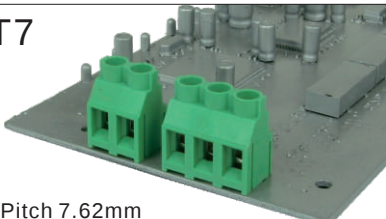


Pitch 7.62mm
Poles 2p/3p
T7xx43500000G*
Number of poles




Electrical:	cULus	TUV	VDE
Voltage rating:	300V	750V	750V
Current rating:	30A	41A	41A
Wire range:	0.20-6mm²		
Solid wire:	10-24AWG	0.2-6mm²	
Stranded wire:	10-24AWG	0.2-6mm²	
Flexible wire:	0.2-4mm²		
Torque :	8.9Lb-In	0.85N.m	0.8N.m

Screw:	M3.5		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	3KV	3KV
Safety Approval:			

T7

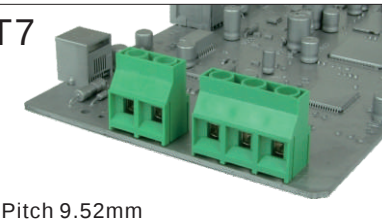


Pitch 9.52mm
Poles 2p/3p
T7xx23500000G*
Number of poles

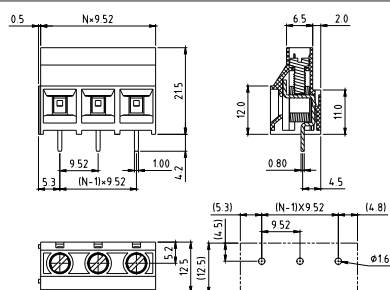


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

T7

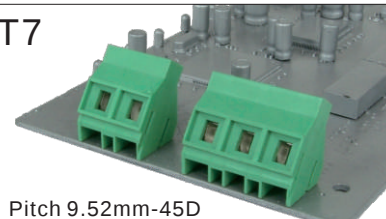


Pitch 9.52mm-45D
Poles 2p/3p
T7xx23510000G*
Number of poles

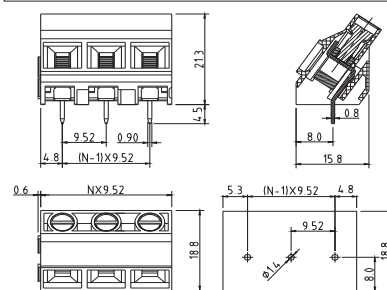


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

KP

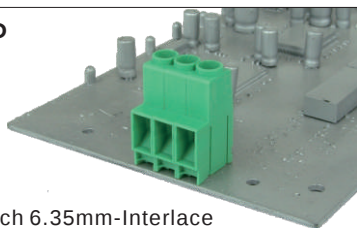


Pitch 6.35mm-Interlace
Poles 2p~16p
KPxx0150000G*(Without cover)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	600V
Current rating:	30A	41A
Wire range:	0.2-6.0mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque:	5.3Lb-In	0.6N.m

Screw:	M3.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	2.2KV	3.0KV
Safety Approval:		

KP

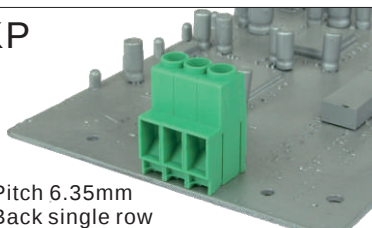


Pitch 6.35mm
Back single row
Poles 1p~16p
KPxx01510000G*(Without cover)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	30A	41A
Wire range:	0.2-6.0mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque:	5.3Lb-In	0.6N.m

Screw:	M3.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

KP

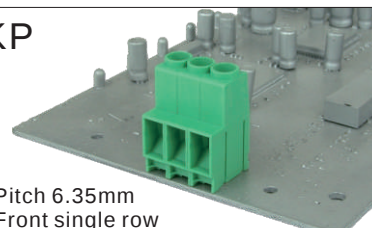


Pitch 6.35mm
Front single row
Poles 1p~16p
KPxx01520000G*(Without cover)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	30A	41A
Wire range:	0.2-6.0mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque:	5.3Lb-In	0.6N.m

Screw:	M3.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

KP

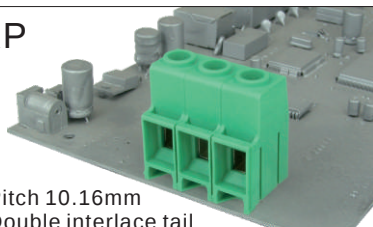


Pitch 10.16mm
Double interlace tail
Poles 2p~12p
KPxx2150000G*(Without cover)
Number of poles

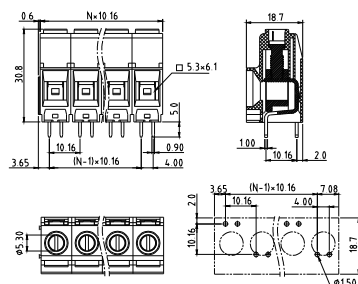


Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating:	65A	76A
Wire range (Rigid wire):	0.5-16mm 2	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	12.2Lb-In	1.38N.m

Screw:	M4.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	2.2KV	3.5KV
Safety Approval:		

KP

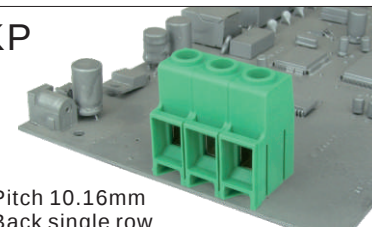


Pitch 10.16mm
Back single row
Poles 2p~12p
KPxx21510000G*(Without cover)
Number of poles

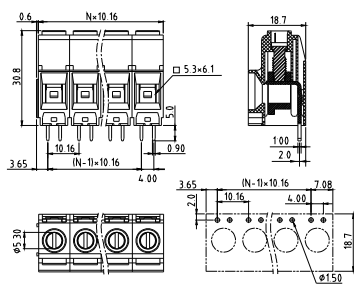


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	65A	76A
Wire range (Rigid wire):	0.5-16mm 2	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	12.2Lb-In	1.38N.m

Screw:	M4.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

KP

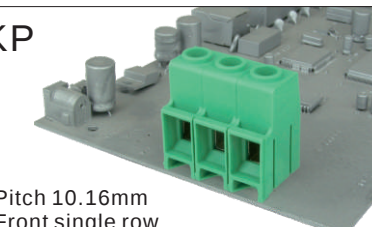

Pitch 10.16mm
Front single row
Poles 2p~12p
KPxx21520000G*(Without cover)
Number of poles

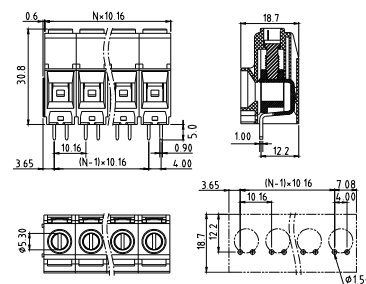


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	65A	76A
Wire range (Rigid wire):	0.5-16mm 2	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	12.2Lb-In	1.38N.m

Screw:	M4.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

K7



Pitch 7.5mm(Left)
Poles 3p
K70303810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus)pending

K7




Pitch 7.5mm(Right)
Poles 3p
K70303800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus)pending

KO

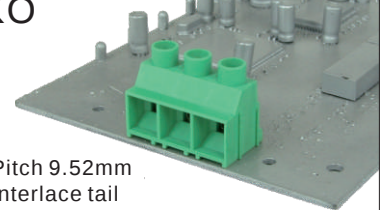


Pitch 9.52mm
Interlace tail
Poles 2p/3p
KOxx21510000G*
Number of poles

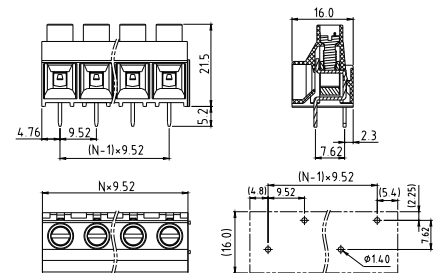


Electrical:	cULus
Voltage rating:	600V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	5.5
Screw:	M3.5
Wire strip length:	7-8mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus)

KO

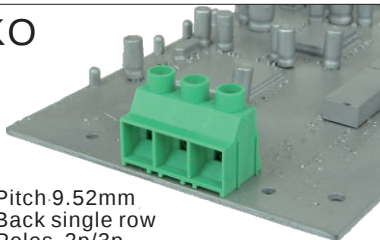


Pitch 9.52mm
Back single row
Poles 2p/3p
KOxx21500000G*
Number of poles

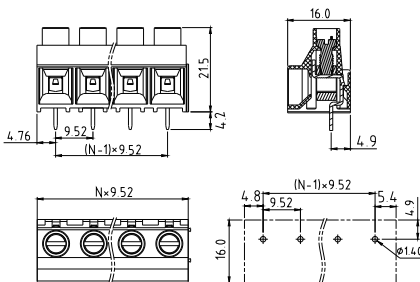


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	5.5

Screw:	M3.5
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

VP

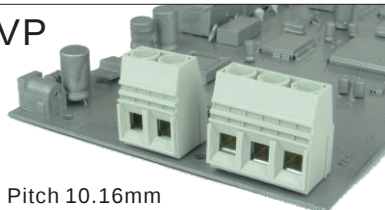


Pitch 10.16mm
Single tail type
Poles 2p/3p
VPxx65840000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 3KV
Safety Approval:	(cULus) (VDE)

VP

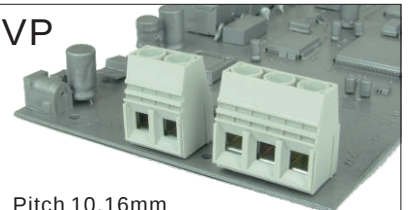


Pitch 10.16mm
Double parallel tail type
Poles 2p/3p
VPxx65850000G* A type(Solder pitch 5.08mm)
Number of poles

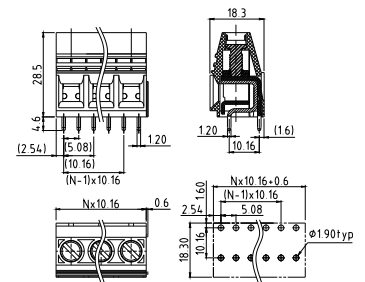


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2KV
Safety Approval:	(cULus) (VDE)

VP

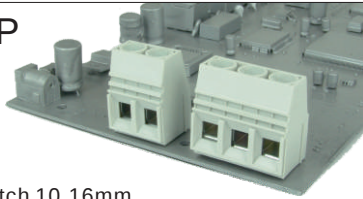


Pitch 10.16mm
Double parallel tail type
Poles 2p/3p
VPxx65880000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VP

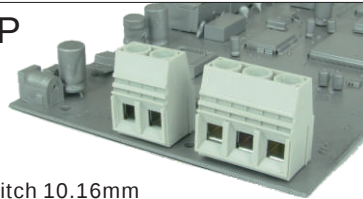


Pitch 10.16mm
Double interlace tail type
Poles 2p/3p
VPxx65870000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 3KV
Safety Approval:	

VP

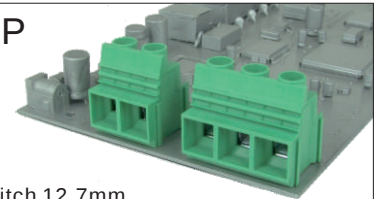


Pitch 12.7mm
Single tail type
Poles 2p/3p
VPxx85540000G*
Number of poles

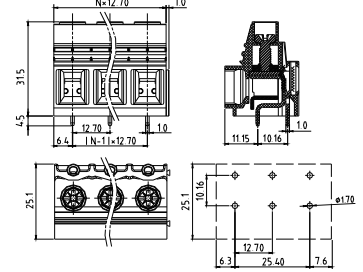


Electrical:	cULus
Voltage rating:	600V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	

VP

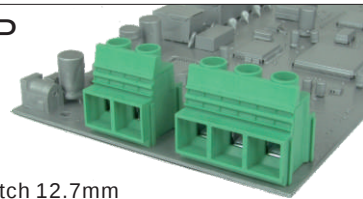


Pitch 12.7mm
Double parallel tail type
Poles 2p/3p
VPxx85550000G* A type(Solder pitch 5.08mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VP

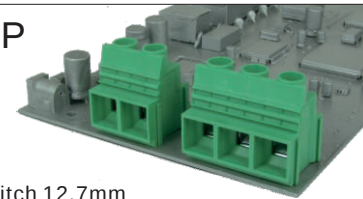


Pitch 12.7mm
Double parallel tail type
Poles 2p/3p
VPxx85580000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VP

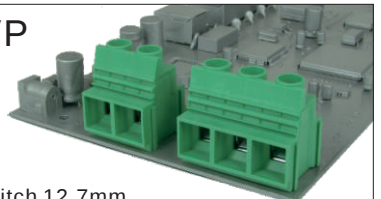


Pitch 12.7mm
Double interlace tail type
Poles 2p/3p
VPxx85570000G* B type(Solder pitch 4.0mm)
Number of poles

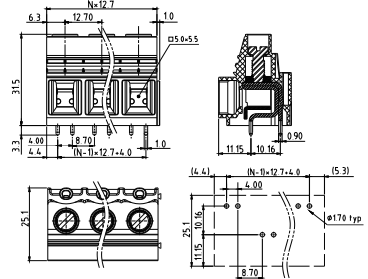


Electrical:	cULus
Voltage rating:	600V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	

KQ

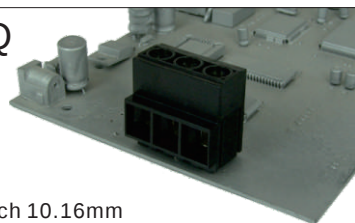


Pitch 10.16mm
Poles 2p/3p
KQxx62000000G* A type
Number of poles

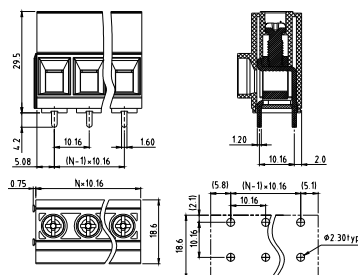


Electrical:	cULus
Voltage rating:	300V
Current rating:	64A
Wire range:	
Solid wire(AWG):	6-22
Stranded wire(AWG):	6-22
Torque(Lb-In):	19

Screw:	M4.5
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EI

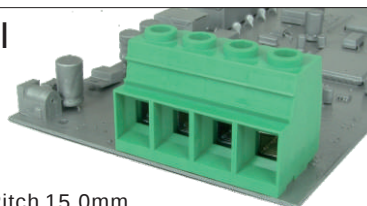


Pitch 15.0mm
Solid block
Poles 2p~10p
EIxxC1530000G*
Number of poles

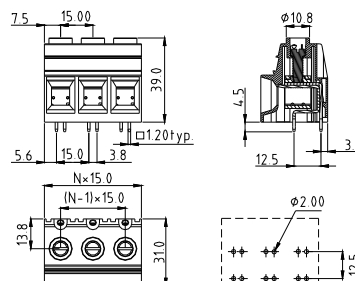


Electrical:	cULus
Voltage rating:	600V
Current rating:	125A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	36.5

Screw:	M5
Wire strip length:	16-19mm
Withstanding Voltage:	2.2KV
Safety Approval:	

EI

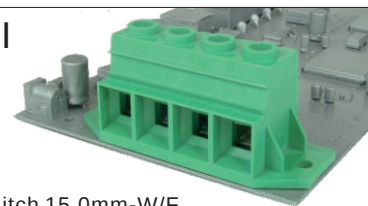

Pitch 15.0mm-W/F
Solid block
Poles 2p~10p
EIxxC1531000G*
Number of poles

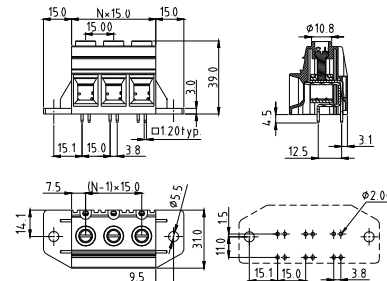


Electrical:	cULus
Voltage rating:	600V
Current rating:	125A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	36.5

Screw:	M5
Wire strip length:	16-19mm
Withstanding Voltage:	2.2KV
Safety Approval:	

K9



Pitch 15.0mm
Poles 1p~10p
K9xxC1520000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	127A
Wire range:	
Solid wire(AWG):	1-20
Stranded wire(AWG):	1-20
Torque(Lb-In):	36.5

Screw:	M6
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	

K9



Pitch 15.0mm
Poles 1p~10p
K9xxC1531000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	127A
Wire range:	
Solid wire(AWG):	1-20
Stranded wire(AWG):	1-20
Torque(Lb-In):	36.5

Screw:	M6
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	

K9



Pitch 17.5mm
Poles 1p~8p
K9xxD4530000G*
Number of poles







Electrical:	cULus
Voltage rating:	600V
Current rating:	160A
Wire range:	2/0-16AWG
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In):	49

Screw:	M6
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	

E9




Pitch 15.24mm
Poles 1p~12p
E9xx75500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	1000V	1000V
Current rating:	65A	57A
Wire range:	0.5-10mm ²	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	15.6Lb-In	1.2N.m
Screw:	M4	
Wire strip length:	10-11mm	
Withstanding Voltage:	4.5KV	
Rate impulse voltage:	8KV	
Safety Approval:		

EJ

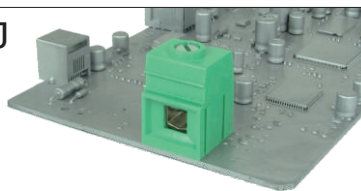

Pitch 19.0mm
Poles 1p
EJ01D1510000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	100A
Wire range:	
Solid wire(AWG):	3-18
Stranded wire(AWG):	3-18
Torque(Lb-In) :	30
Screw:	M5
Wire strip length:	12-15mm
Withstanding Voltage:	2.2KV
Safety Approval:	

Rising Clamp System

E4



Solid block
Poles 2p/3p/4p/6p
E4xx01800000G*
Number of poles

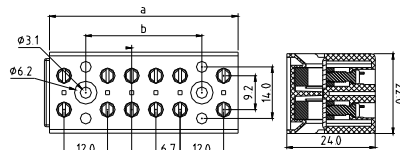


poles	a(mm)	b(mm)
2pole	20	
3pole	31	11
4pole	38	18
6pole	52	32

Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-26
Stranded wire(AWG):	10-26
Torque(Lb-In) :	9
Screw:	M3.5
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

V4



Solid block
Poles 2p~5p
V4xx01800000G*
Number of poles



Poles	a(mm)	b(mm)
2pole	29.0	
3pole	46.0	17.0
4pole	57.0	28.0
5pole	68.0	39.0

Electrical:	cULus
Voltage rating:	600V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-22
Stranded wire(AWG):	6-22
Torque(Lb-In) :	8.7

Screw:	M4
Wire strip length:	6-7mm
Withstanding Voltage:	2.2KV
Safety Approval:	