



# Header for Pluggable System

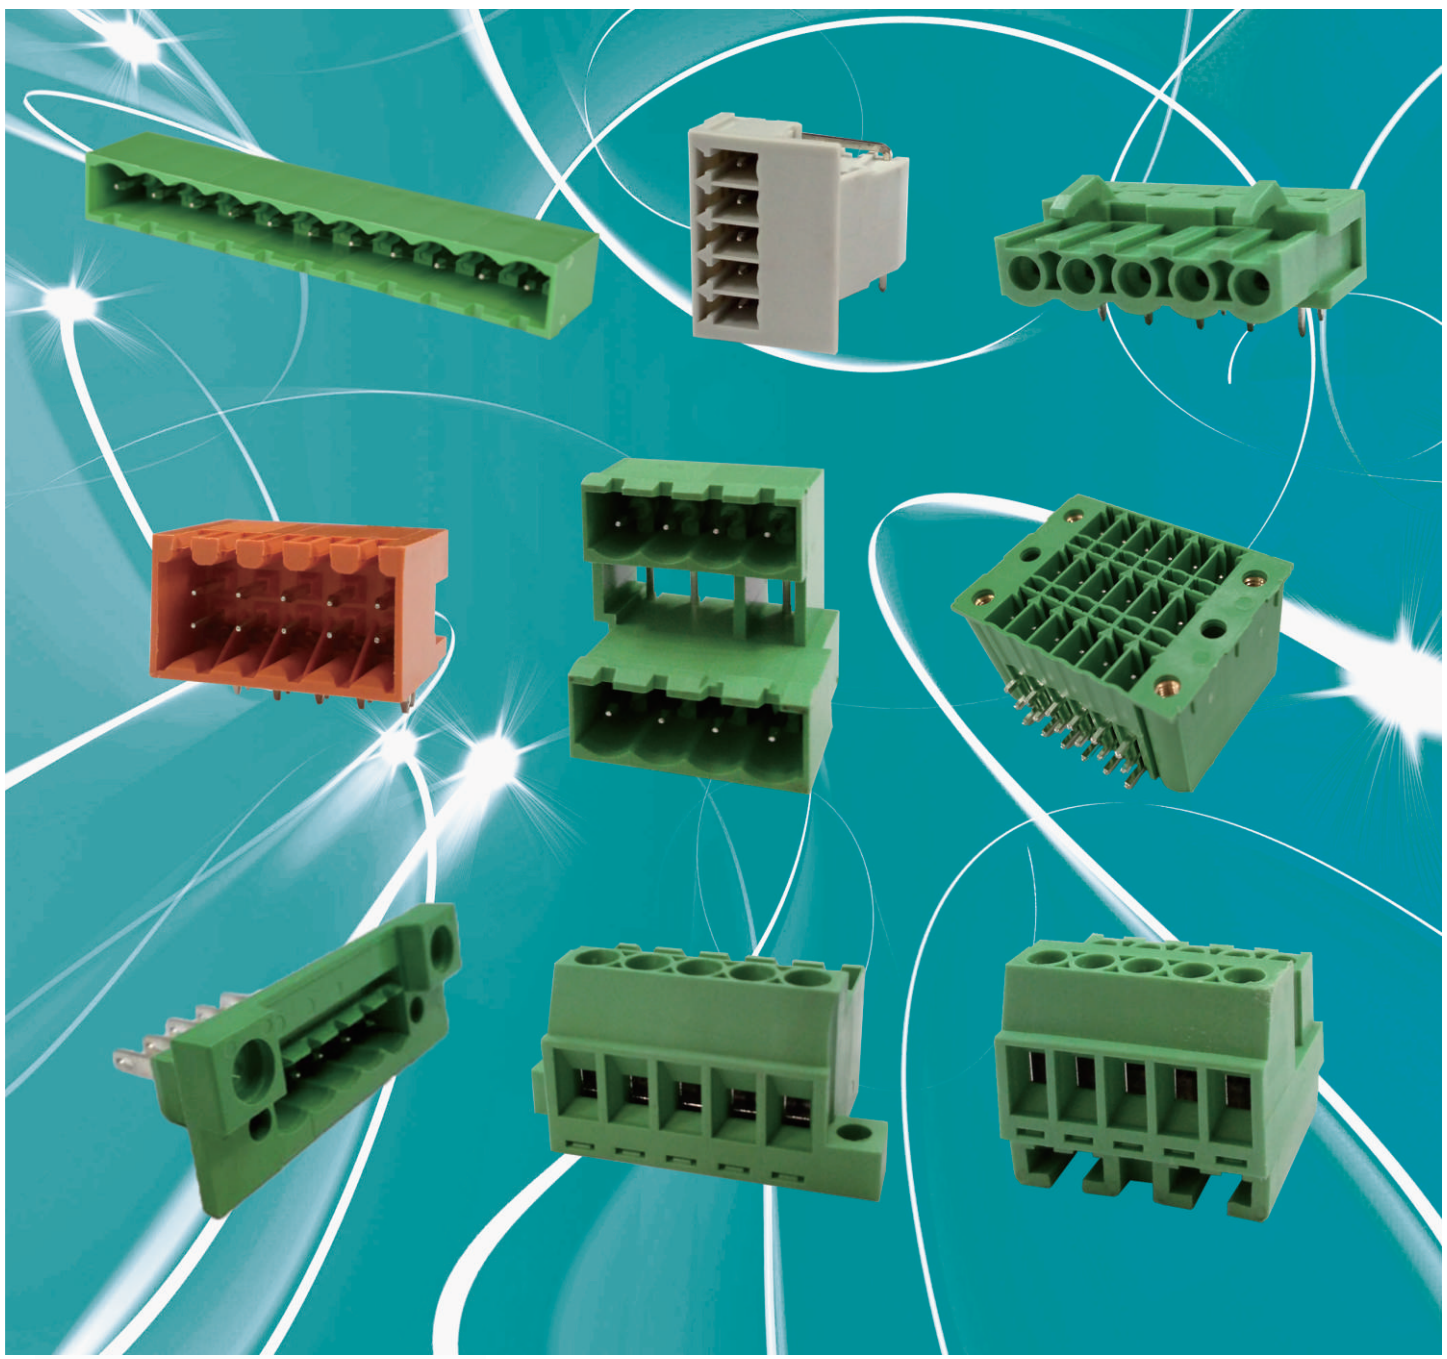


E

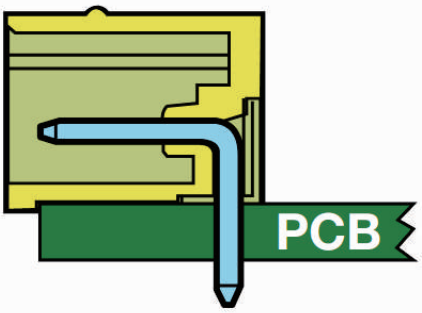


Pitch: 2.5, 2.54, 3.5, 3.81, 5.0, 5.08, 6.35, 7.5, 7.62, 10.16, 15.0  
Rated Voltage Range(cULus) :150V-600V  
Rated Current Range(cULus): 4A-115A

**OQ**

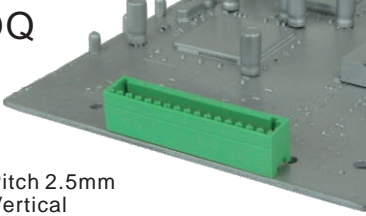


Pitch 2.5mm  
Vertical  
Poles 2p~24p  
OQxxB150000G\*  
Number of poles

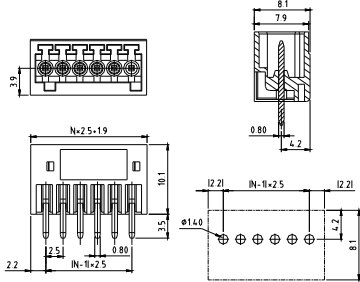


Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

**OQ**

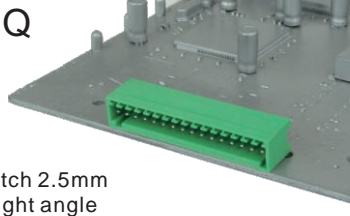


Pitch 2.5mm  
Right angle  
Poles 2p~24p  
OQxxB1510000G\*  
Number of poles

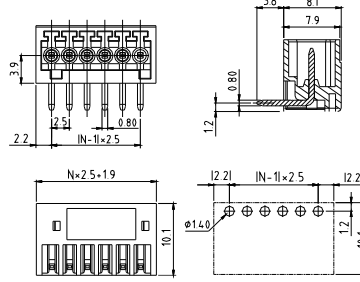


Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

**OQ**




Pitch 2.54mm  
Vertical, W/F, THT type  
Poles 2p~16p  
OQxxC15x0000G\*  
Number of poles

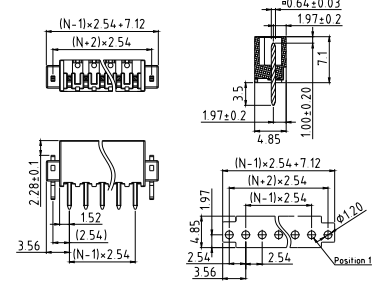


Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

**OQ**




Pitch 2.54mm  
Right angle, W/F, THT type  
Poles 2p~16p  
OQxxC15x0000G\*  
Number of poles

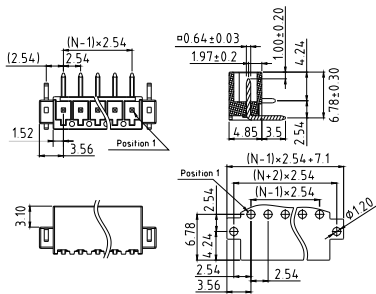


Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

**OQ**

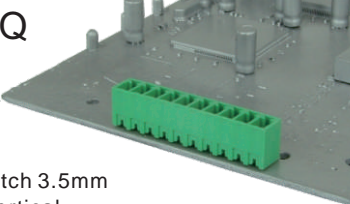


Pitch 3.5mm  
Vertical  
Poles 2p~24p  
OQxx1250000G\*  
Number of poles

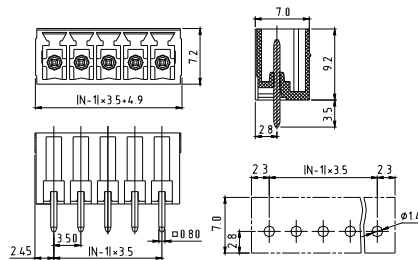


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:	<b>cULus</b>	<b>VDE</b>

**OQ**

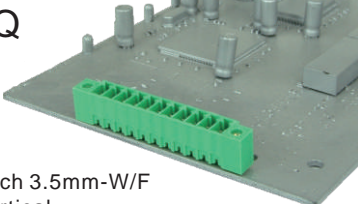

Pitch 3.5mm-W/F  
Vertical  
Poles 2p~24p  
OQxx1250000G\*  
Number of poles

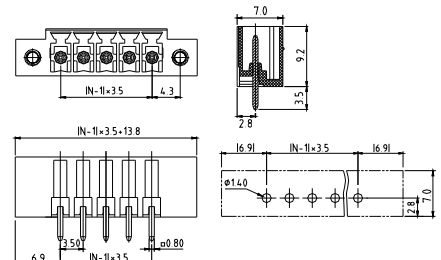


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		


Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:	<b>cULus</b>	<b>VDE</b>

E

**OQ**

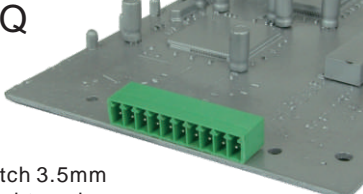

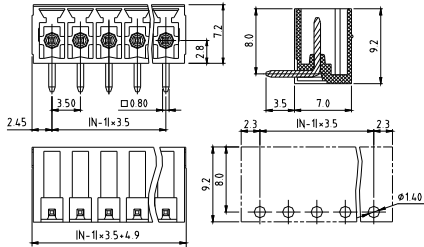

Pitch 3.5mm  
Right angle  
Poles 2p~24p  
OQxx12510000G\*  
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		


**E**

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

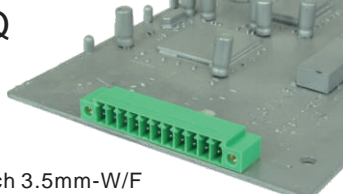

**OQ**

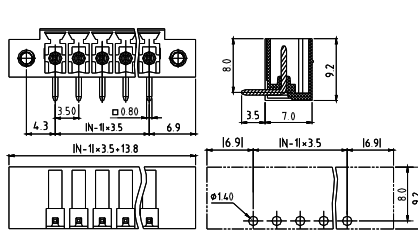


Pitch 3.5mm-W/F  
Right angle  
Poles 2p~24p  
OQxx15510000G\*  
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

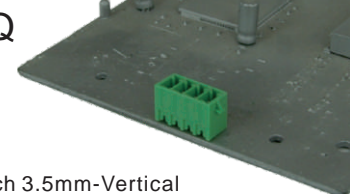

**OQ**

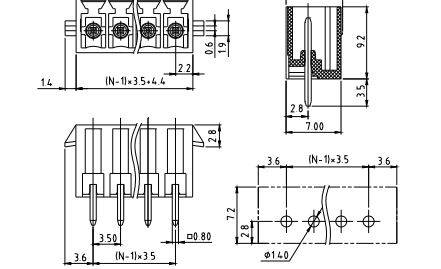


Pitch 3.5mm-Vertical  
With latch holder  
Poles 2p~24p  
OQxx17500000G\*  
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**OQ**

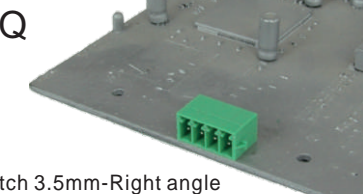


Pitch 3.5mm-Right angle  
With latch holder  
Poles 2p~24p  
OQxx17510000G\*  
Number of poles

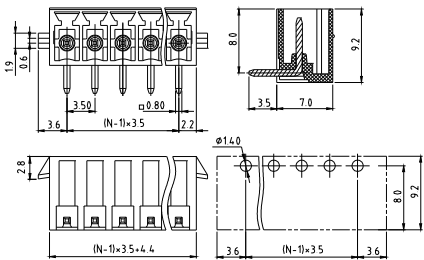

Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**OQ**

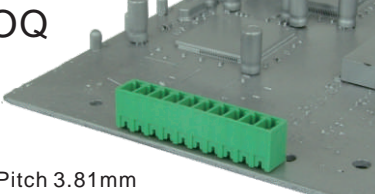


Pitch 3.81mm  
Vertical  
Poles 2p~24p  
OQxx32500000G\*  
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**OQ**

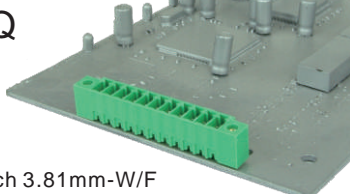

Pitch 3.81mm-W/F  
Vertical  
Poles 2p~24p  
OQxx35500000G\*  
Number of poles

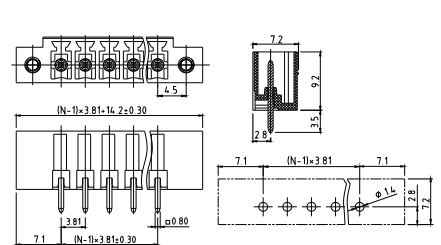


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		


Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		



**OQ**

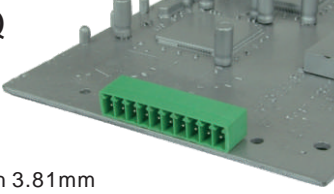


Pitch 3.81mm  
Right angle  
Poles 2p~24p  
OQxx32510000G\*  
Number of poles

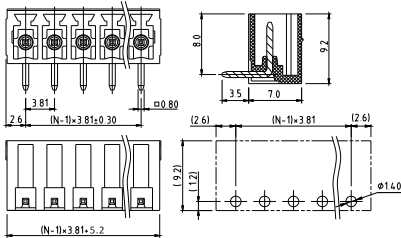


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**OQ**

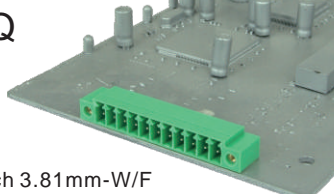


Pitch 3.81mm-W/F  
Right angle  
Poles 2p~24p  
OQxx35510000G\*  
Number of poles

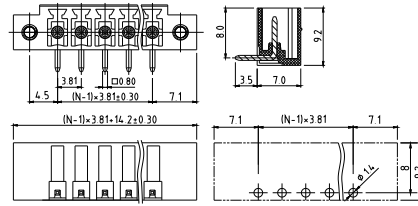


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**OQ**

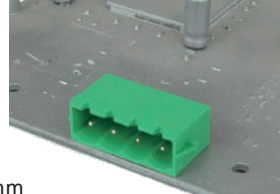


Pitch 5.0mm  
Right angle, With latch holder  
Poles 2p~24p  
OQxx77510000G\*  
Number of poles

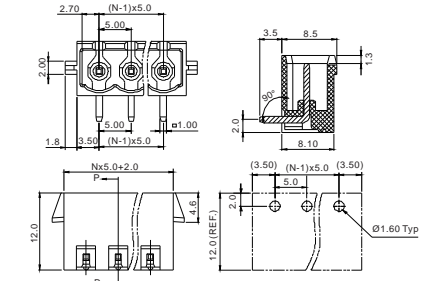


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	

**OQ**




Pitch 5.0mm  
Vertical, With latch holder  
Poles 2p~24p  
OQxx77500000G\*  
Number of poles

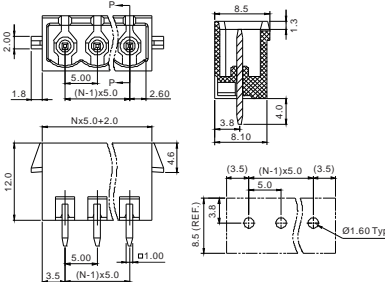


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	

**OQ**

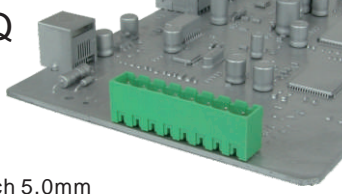


Pitch 5.0mm  
Vertical, Close  
Poles 2p~24p  
OQxx71500000G\*  
Number of poles

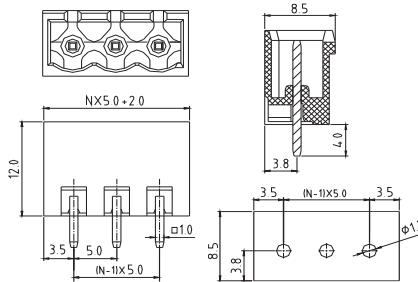


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

**OQ**

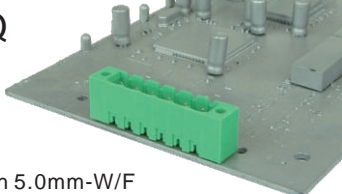

Pitch 5.0mm-W/F  
Vertical  
Poles 2p~24p  
OQxx71500000G\*  
Number of poles

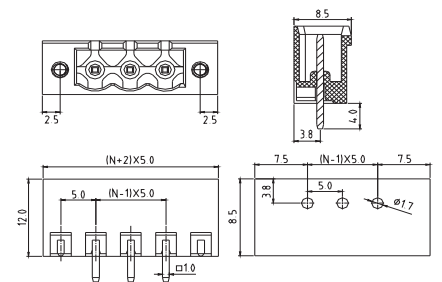


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			


E



**OQ**

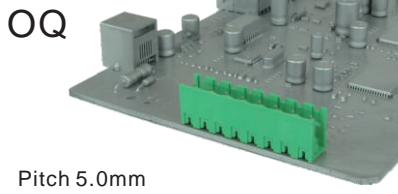


Pitch 5.0mm  
Vertical, Open  
Poles 2p~24p  
OQxx7050000G\*  
Number of poles

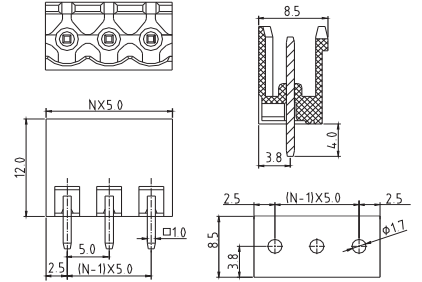


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

**OQ**

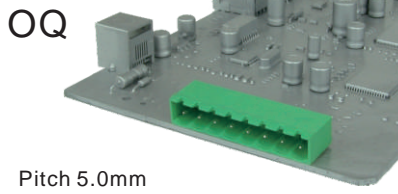


Pitch 5.0mm  
Right angle  
Poles 2p~24p  
OQxx71510000G\*  
Number of poles

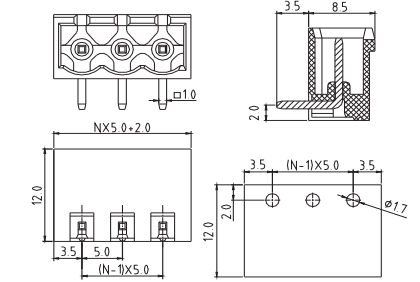


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

**OQ**

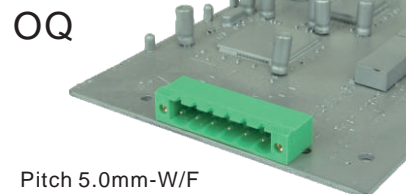

Pitch 5.0mm-W/F  
Right angle  
Poles 2p~24p  
OQxx75510000G\*  
Number of poles

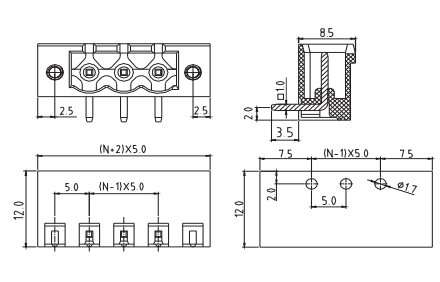

Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			


E

Withstanding Voltage: 1.6KV 2.5KV 2.5KV  
Safety Approval:   


Withstanding Voltage: 1.6KV 2.5KV 2.5KV  
Safety Approval:   

Withstanding Voltage: 1.6KV 2.5KV 2.5KV  
Safety Approval:   

**OQ**

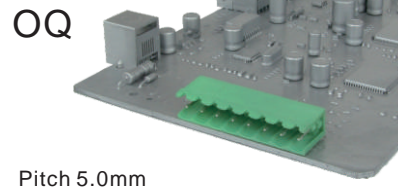

Pitch 5.0mm  
Right angle, Open  
Poles 2p~24p  
OQxx70510000G\*  
Number of poles

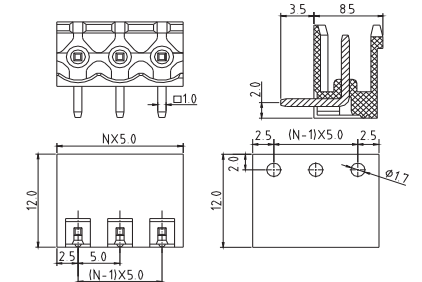


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			


**OQ**



Pitch 5.0mm  
(Right angle, With flange)  
Body reverse  
Poles 2p~16p  
OQxx755AxxxxG\*  
Number of poles

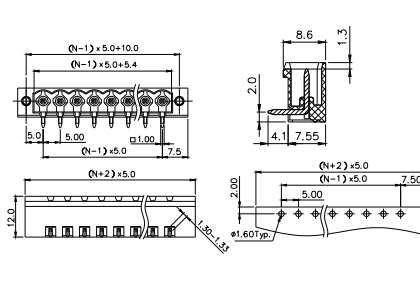


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage: 1.6KV  
Safety Approval: 


**OQ**



Pitch 5.08mm  
(Right angle, With flange)  
Body reverse  
Poles 2p~24p  
OQxx555AxxxxG\*  
Number of poles

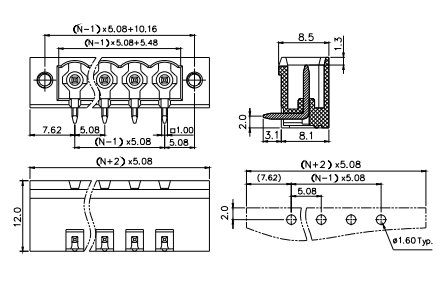


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage: 1.6KV  
Safety Approval: 

QQ




Pitch 5.08mm(Right angle, Close)  
Body reverse  
Poles 2p~24p  
QQxx545AxxxxG\*  
Number of poles

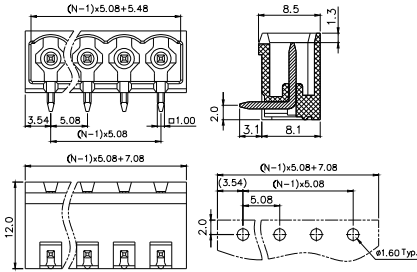


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	

QQ




Pitch 5.08mm  
Vertical, Close  
Poles 2p~24p  
QQxx5450000G\*  
Number of poles

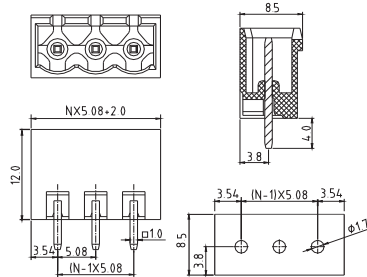


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

QQ

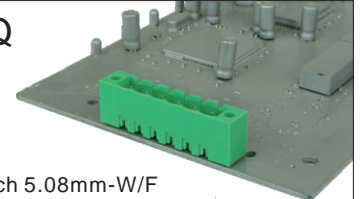


Pitch 5.08mm-W/F  
Vertical  
Poles 2p~24p  
QQxx5550000G\*  
Number of poles

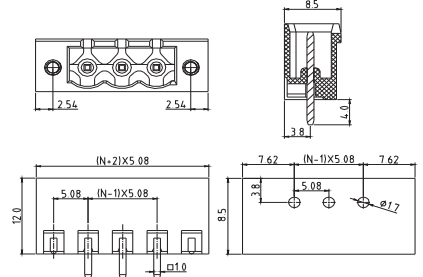


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

QQ




Pitch 5.08mm  
Vertical, Open  
Poles 2p~24p  
QQxx5350000G\*  
Number of poles

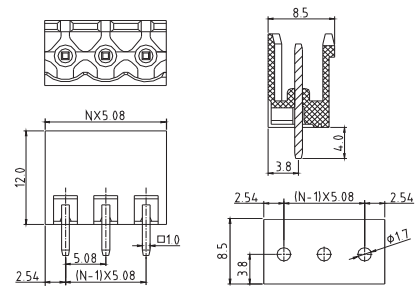


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

QQ




Pitch 5.08mm  
Right angle, Close  
Poles 2p~24p  
QQxx54510000G\*  
Number of poles

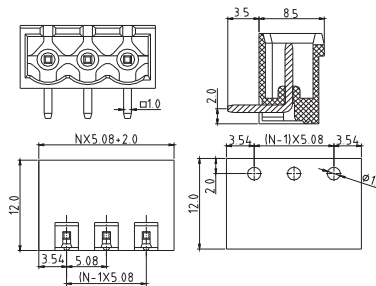


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

QQ

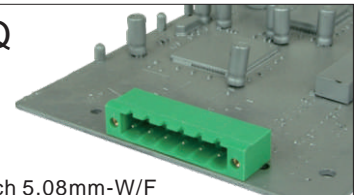

Pitch 5.08mm-W/F  
Right angle  
Poles 2p~24p  
QQxx55510000G\*  
Number of poles

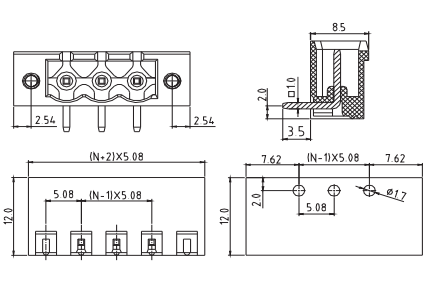


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			


E

**OQ**

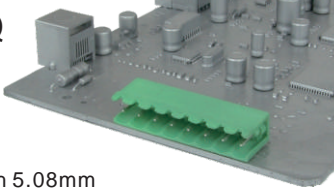


Pitch 5.08mm  
Right angle, Open  
Poles 2p~24p  
OQxx53510000G\*  
Number of poles

**OQ**



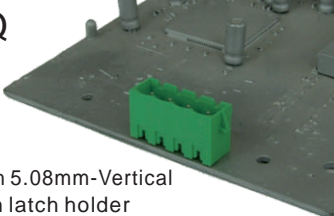


Pitch 5.08mm-Vertical  
With latch holder  
Poles 2p~24p  
OQxx57500000G\*  
Number of poles

**OQ**

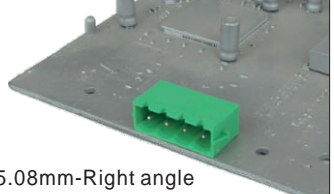

Pitch 5.08mm-Right angle  
With latch holder  
Poles 2p~24p  
OQxx57510000G\*  
Number of poles

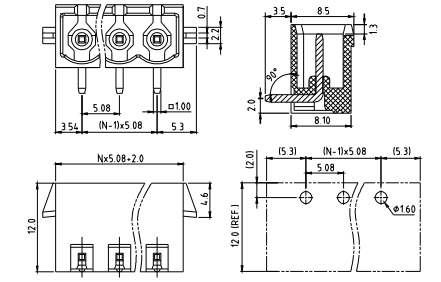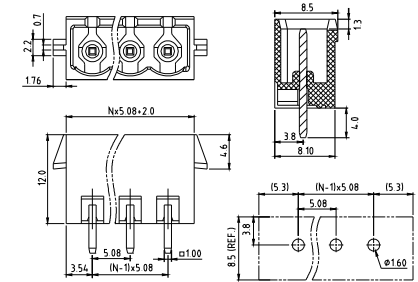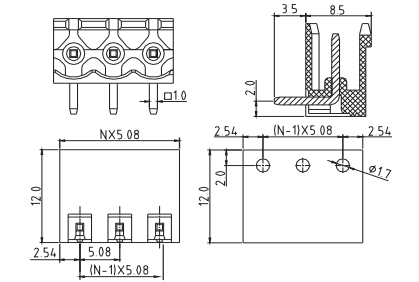

Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	


**E**

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

Withstanding Voltage:	1.6KV
Safety Approval:	


Withstanding Voltage:	1.6KV
Safety Approval:	

**OQ**

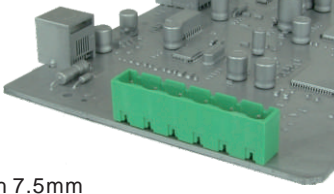


Pitch 7.5mm  
Vertical, Close  
Poles 2p~16p  
OQxxA1500000G\*  
Number of poles

**OQ**



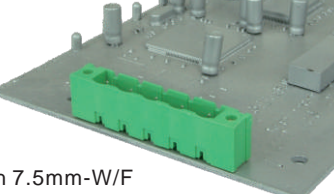


Pitch 7.5mm-W/F  
Vertical  
Poles 2p~16p  
OQxxA5500000G\*  
Number of poles

**OQ**

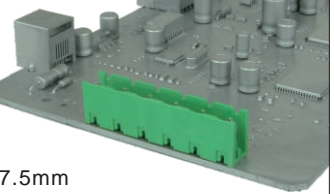

Pitch 7.5mm  
Vertical, Open  
Poles 2p~16p  
OQxxA0500000G\*  
Number of poles

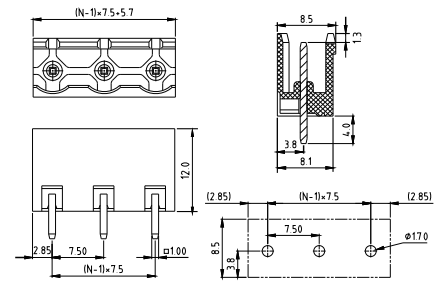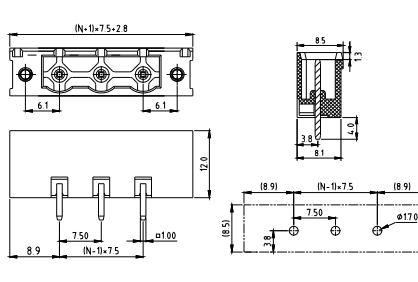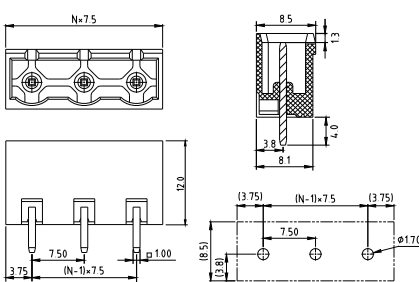

Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		


Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		






OQ




Pitch 7.62mm  
Right angle, Close  
Poles 2p~16p  
OQxx01510000G\*  
Number of poles

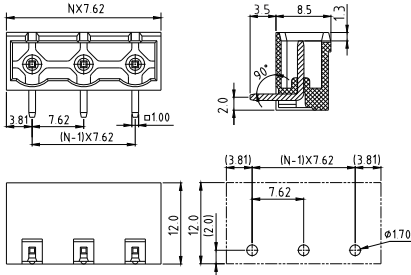


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

OQ

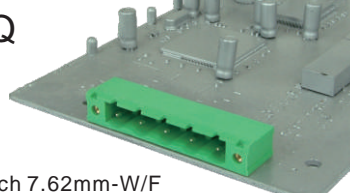


Pitch 7.62mm-W/F  
Right angle  
Poles 2p~16p  
OQxx05510000G\*  
Number of poles

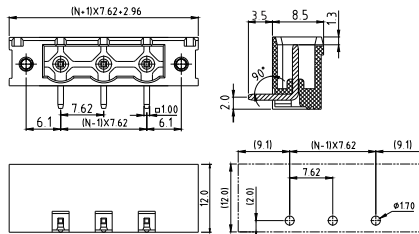


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

OQ

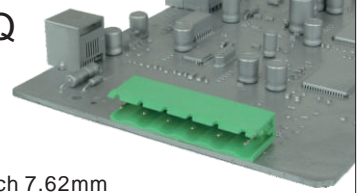


Pitch 7.62mm  
Right angle, Open  
Poles 2p~16p  
OQxx00510000G\*  
Number of poles

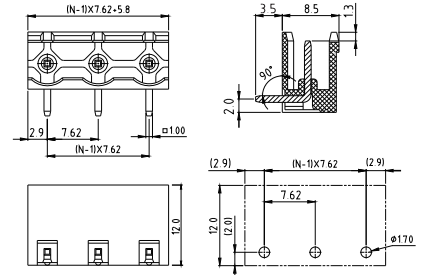


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

OQ




Pitch 7.62mm  
Right angle, Close  
Body reverse  
Poles 2p~16p  
OQxx015AxxxxG\*  
Number of poles

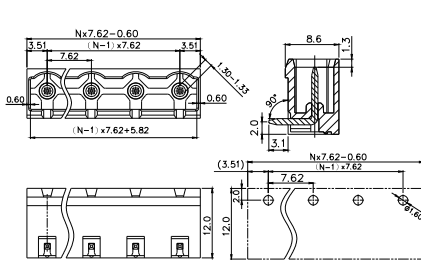


Electrical:	cULus	
Voltage rating:	300V	
Current rating:	20A	
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	
Safety Approval:		

OQ




Pitch 2.54mm  
Vertical, W/F, W/cover, SMT type  
Poles 2p~16p  
OQxxCE0xB000G\*  
Number of poles

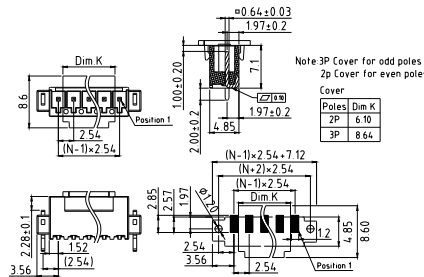


Electrical:	cULus	
Voltage rating:	150V	
Current rating:	6A	
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.3KV	
Safety Approval:		

OQ




Pitch 2.54mm  
Right angle, W/F, SMT type  
Poles 2p~16p  
OQxxCE0xB000G\*  
Number of poles

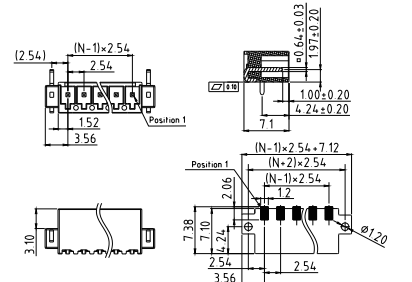


Electrical:	cULus	
Voltage rating:	150V	
Current rating:	6A	
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.3KV	
Safety Approval:		

**OQ**



Pitch 3.5/3.81 mm  
With cover, SMT type  
Poles 2p~16p  
OQxx1/3500D000G\*  
Number of poles

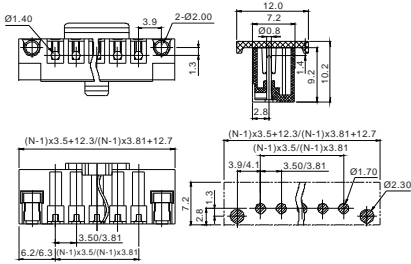


Electrical: cULus  
Voltage rating: 150V  
Current rating: 8A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.3KV  
Safety Approval: (cULus) pending

**OQ**



Pitch 2.5mm  
Vertical, Close, THR type  
Poles 2p~16p  
OQxxBE000000G\*  
Number of poles

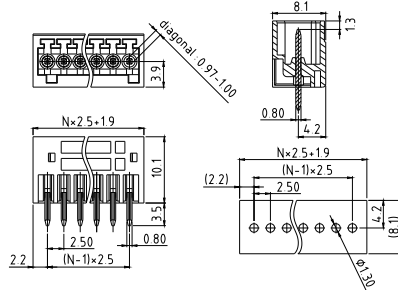


Electrical: cULus  
Voltage rating: 150V  
Current rating: 4A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.3KV  
Safety Approval: cULus

**OQ**




Pitch 2.5mm  
Right angle, Close, THR type  
Poles 2p~16p  
OQxxBE010000G\*  
Number of poles

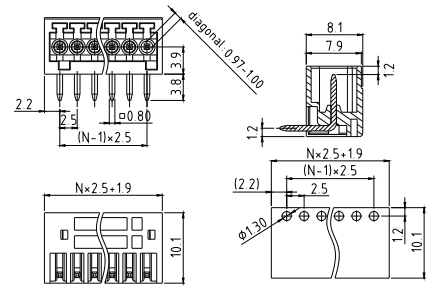


Electrical: cULus  
Voltage rating: 150V  
Current rating: 4A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.3KV  
Safety Approval: cULus

**OQ**




Pitch 2.54mm  
Vertical, W/F, W/cover, THR type  
Poles 2p~16p  
OQxxCE0xB000G\*  
Number of poles

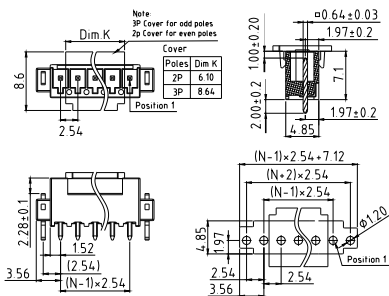


Electrical: cULus  
Voltage rating: 150V  
Current rating: 6A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.3KV  
Safety Approval: cULus

**OQ**




Pitch 2.54mm  
Right angle, W/F, THR type  
Poles 2p~16p  
OQxxCE0xB000G\*  
Number of poles

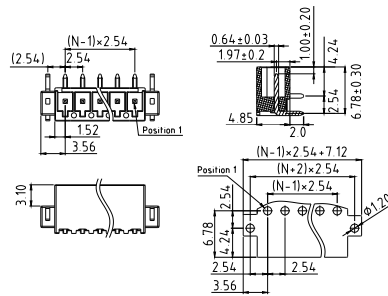


Electrical: cULus  
Voltage rating: 150V  
Current rating: 6A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.3KV  
Safety Approval: cULus

**OQ**



Pitch 3.5mm  
Vertical, Close, THR type, W/cover  
Note: 3p cover for odd poles, 2p cover for even poles  
Poles 2~16p  
OQxx1G00B000G\*  
Number of poles

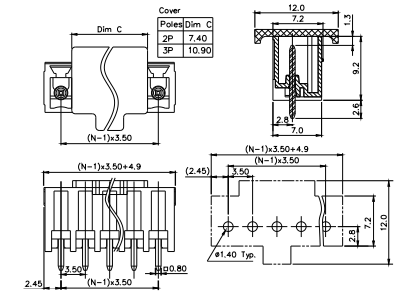


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.6KV  
Safety Approval: cULus


E



QQ




Pitch 3.5mm  
Vertical, W/F, THR type, W/cover  
Note: 3p cover for odd poles, 2p cover for even poles  
Poles 2p~16p  
OQxx1H00B000G\*  
Number of poles

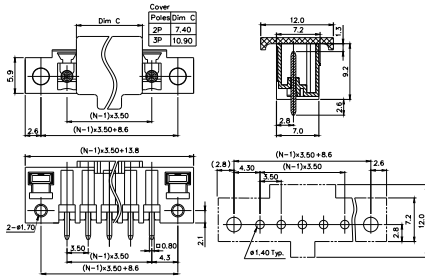


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	cULus

QQ



Pitch 3.5mm  
Right angle, Close, THR type  
Poles 2p~16p  
OQxx1G01B000G\*  
Number of poles

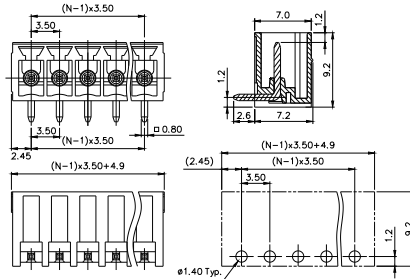


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	cULus

QQ



Pitch 3.5mm  
Right angle, W/F, THR type  
Poles 2p~16p  
OQxx1H01B000G\*  
Number of poles

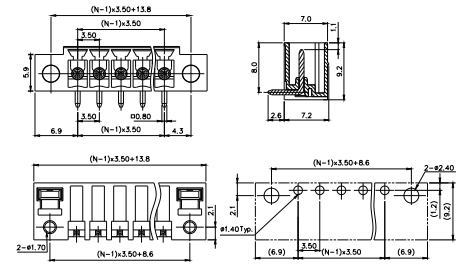


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	cULus

QQ




Pitch 3.5mm  
Body reverse  
Poles 2p~12p  
OQxx120A0000G\*  
Number of poles

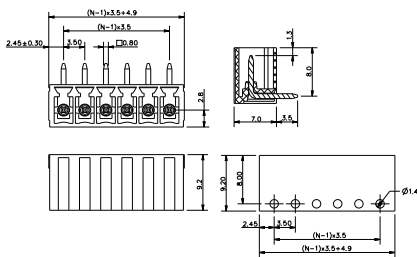


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	2.5KV
Safety Approval:	

QQ




Pitch 3.81mm  
Vertical, Close, THR type, W/cover  
Note: 3p cover for odd poles, 2p cover for even poles  
Poles 2p~16p  
OQxx3G00B000G\*  
Number of poles

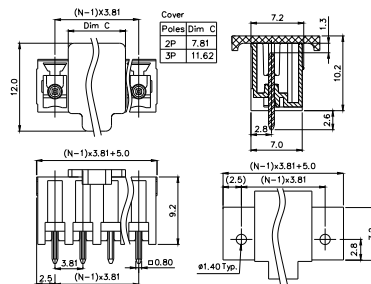


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	cULus

QQ



Pitch 3.81mm  
Vertical, W/F, THR type, W/cover  
Note: 3p cover for odd poles, 2p cover for even poles  
Poles 2p~16p  
OQxx3H00B000G\*  
Number of poles

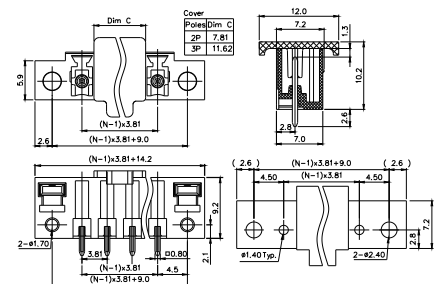


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	cULus

OQ



Pitch 3.81mm  
Right angle, Close, THR type  
Poles 2p~16p  
OQxx3G01B000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>UL</b>

OQ




Pitch 3.81mm  
Right angle, W/F, THR type  
Poles 2p~16p  
OQxx3H01B000G\*  
Number of poles

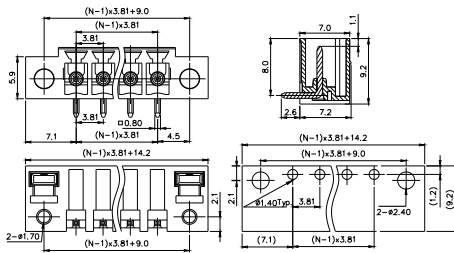


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>UL</b>

OQ




Pitch 5.08mm  
Vertical, Close, THR type, W/cover  
Note: 3p cover for odd poles, 2p cover for even poles  
Poles 2p~12p  
OQxx5E00B000G\*  
Number of poles

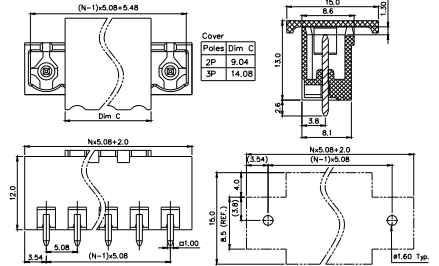


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>UL</b>

OQ



Pitch 5.08mm  
Vertical, W/F, THR type, W/cover  
Note: 3p cover for odd poles, 2p cover for even poles  
Poles 2p~12p  
OQxx5F00B000G\*  
Number of poles

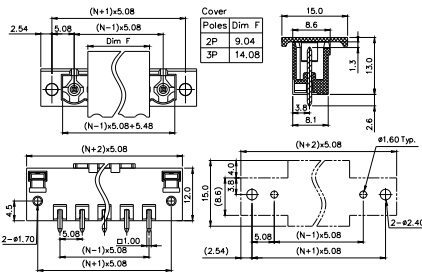


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>UL</b>

OQ



Pitch 5.08mm  
Right angle, Close, THR type  
Poles 2p~12p  
OQxx5E01B000G\*  
Number of poles

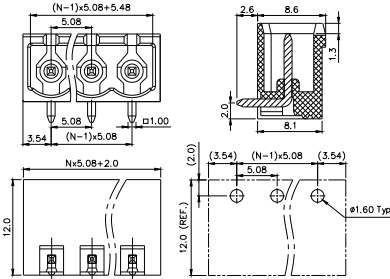


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>UL</b>

OQ



Pitch 5.08mm  
Right angle, W/F, THR type  
Poles 2p~12p  
OQxx5F01B000G\*  
Number of poles

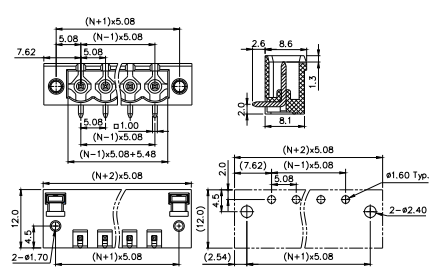


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	


Withstanding Voltage:	1.6KV
Safety Approval:	<b>UL</b>

E

VL

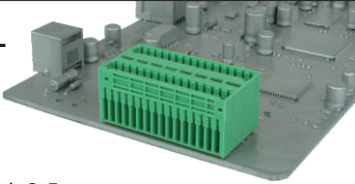


Pitch 2.5mm  
Close, Vertical  
Poles 2\*2p~2\*24p  
VLxxB150000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

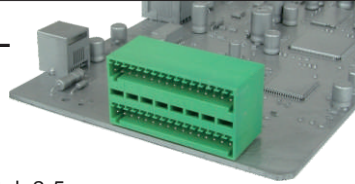


Pitch 2.5mm  
Close, Right angle  
Poles 2\*2p~2\*24p  
VLxxB1510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

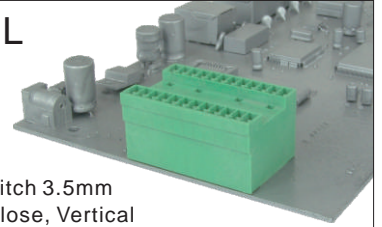

Pitch 3.5mm  
Close, Vertical  
Poles 2\*2p~2\*24p  
VLxx11500000G\*  
Number of poles



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	


E

Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>


Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

VL

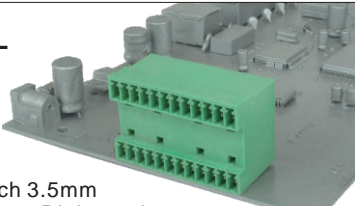


Pitch 3.5mm  
Close, Right angle  
Poles 2\*2p~2\*24p  
VLxx11510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

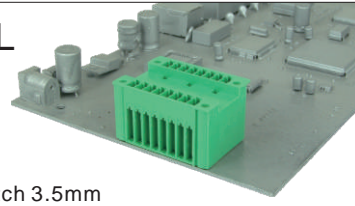


Pitch 3.5mm  
W/F, Vertical  
Poles 2\*2p~2\*24p  
VLxx12500000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

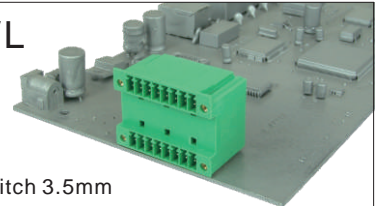

Pitch 3.5mm  
W/F, Right angle  
Poles 2\*2p~2\*24p  
VLxx12510000G\*  
Number of poles



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	


Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>


Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>



**VL**

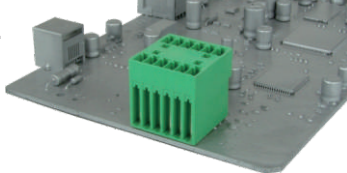


Pitch 3.5mm  
Close, Vertical (B type)  
Poles 2\*2p~2\*24p  
VLxx1350000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**




Pitch 3.5mm  
Close, Right angle(B type)  
Poles 2\*2p~2\*24p  
VLxx13510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**

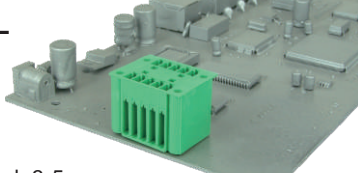


Pitch 3.5mm  
W/F, Vertical(B type)  
Poles 2\*2p~2\*24p  
VLxx14500000G\*  
Number of poles

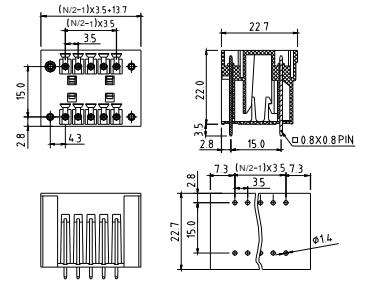


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**

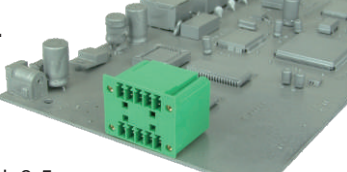


Pitch 3.5mm  
W/F, Right angle(B type)  
Poles 2\*2p~2\*24p  
VLxx145100000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**




Pitch 3.81mm  
Close, Vertical  
Poles 2\*2p~2\*24p  
VLxx31500000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**



Pitch 3.81mm  
Close, Right angle  
Poles 2\*2p~2\*24p  
VLxx315100000G\*  
Number of poles

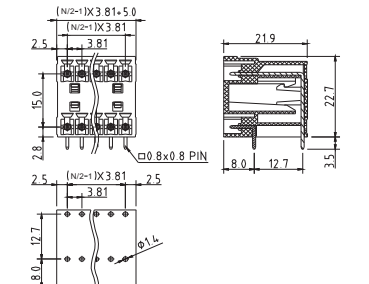


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	


Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

E

VL

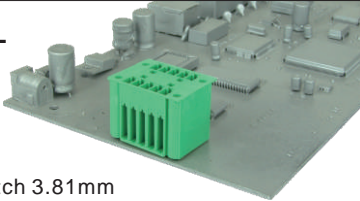


Pitch 3.81mm  
W/F, Vertical  
Poles 2\*2p~2\*24p  
VLxx3250000G\*  
Number of poles

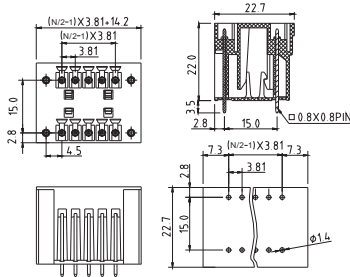


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

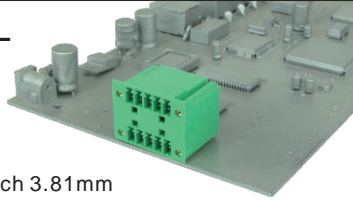


Pitch 3.81mm  
W/F, Right angle  
Poles 2\*2p~2\*24p  
VLxx32510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

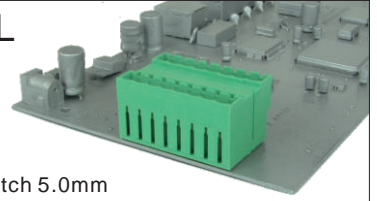

Pitch 5.0mm  
Close, Vertical  
Poles 2\*2p~2\*24p  
VLxx71500000G\*  
Number of poles



Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	


E

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>


Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

VL

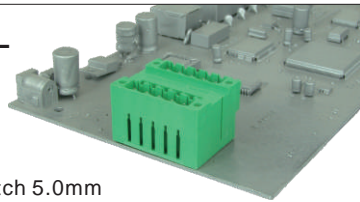


Pitch 5.0mm  
W/F, Vertical  
Poles 2\*2p~2\*24p  
VLxx72500000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

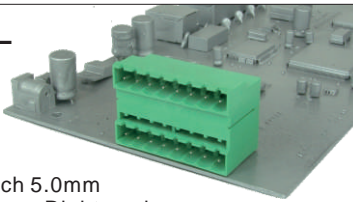


Pitch 5.0mm  
Close, Right angle  
Poles 2\*2p~2\*24p  
VLxx71510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

VL

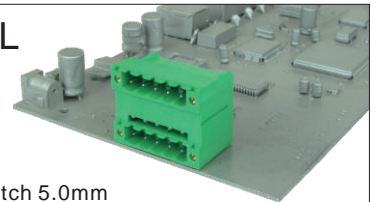

Pitch 5.0mm  
W/F, Right angle  
Poles 2\*2p~2\*24p  
VLxx72510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>


Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**

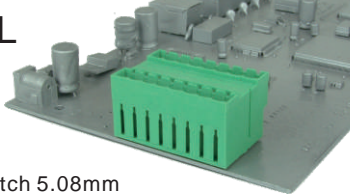


Pitch 5.08mm  
Close, Vertical  
Poles 2\*2p~2\*24p  
VLxx5150000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**

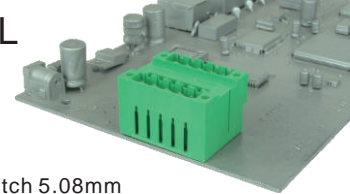


Pitch 5.08mm  
W/F, Vertical  
Poles 2\*2p~2\*24p  
VLxx5250000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**

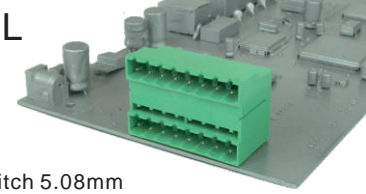


Pitch 5.08mm  
Close, Right angle  
Poles 2\*2p~2\*24p  
VLxx51510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**VL**

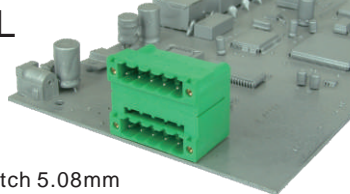


Pitch 5.08mm  
W/F, Right angle  
Poles 2\*2p~2\*24p  
VLxx52510000G\*  
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**EL**

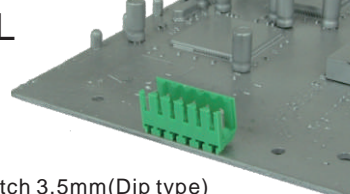


Pitch 3.5mm(Dip type)  
Open, Vertical  
Poles 2p~24p  
ELxx11520000G\*  
Number of poles

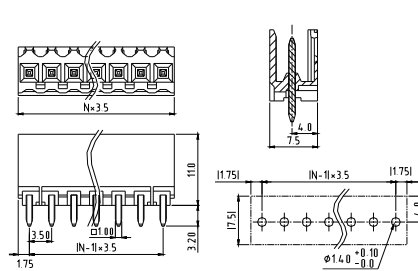


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

**EL**

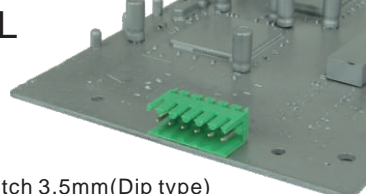

Pitch 3.5mm(Dip type)  
Open, Right angle  
Poles 2p~24p  
ELxx11530000G\*  
Number of poles

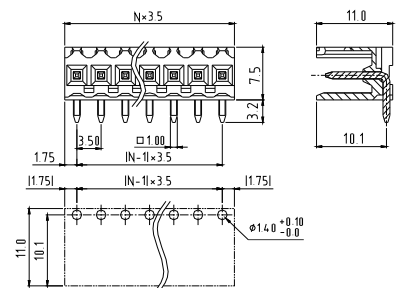


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>


**E**



EL



Pitch 3.5mm(Dip type)  
Close, Vertical  
Poles 2p~24p  
ELxx12520000G\*  
Number of poles

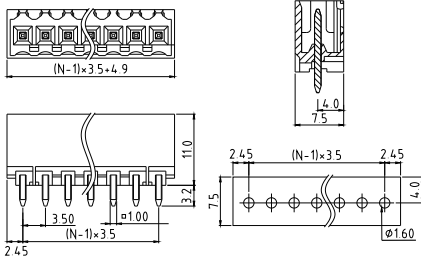


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:

Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

EL



Pitch 3.5mm(Dip type)  
Close, Right angle  
Poles 2p~24p  
ELxx12530000G\*  
Number of poles

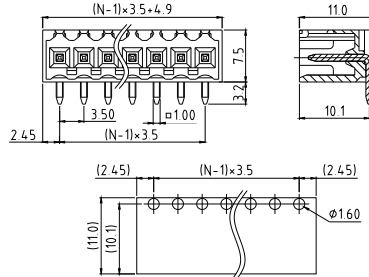

Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:

Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

EL



Pitch 3.5mm(Dip type)  
W/F, Vertical  
Poles 2p~24p  
ELxx15520000G\*  
Number of poles

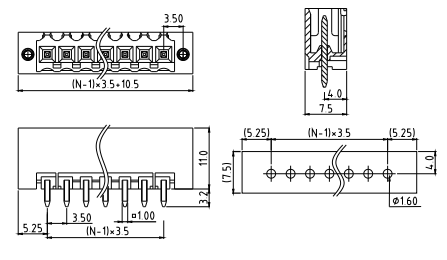


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:

Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

EL



Pitch 3.5mm(Dip type)  
W/F, Right angle  
Poles 2p~24p  
ELxx15530000G\*  
Number of poles

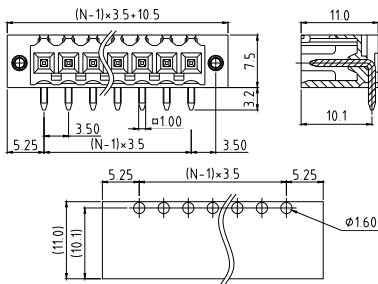

Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:

Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

EL



Pitch 3.5mm(THR type)  
Open, Vertical  
Poles 2p~24p  
ELxx110A0000G\*  
Number of poles

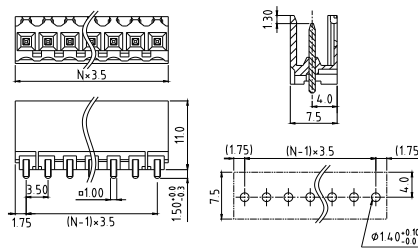

Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:

Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

EL



Pitch 3.5mm(THR type)  
Open, Right angle  
Poles 2p~24p  
ELxx110B0000G\*  
Number of poles




Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:


Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

**EL**

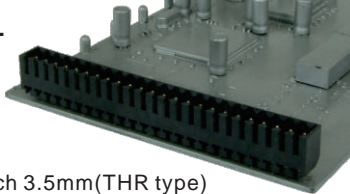


Pitch 3.5mm(THR type)  
Close, Vertical  
Poles 2p~24p  
ELxx120A0000G\*  
Number of poles

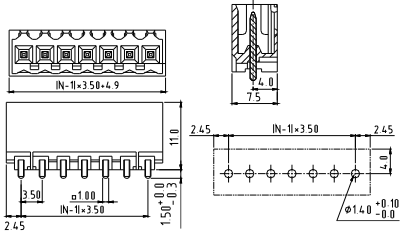



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

**EL**

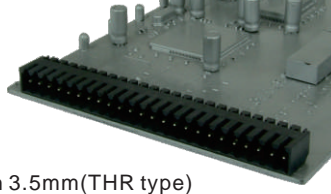


Pitch 3.5mm(THR type)  
Close, Right angle  
Poles 2p~24p  
ELxx120B0000G\*  
Number of poles

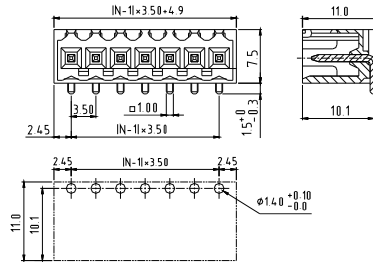



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

**EL**

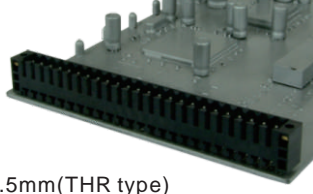


Pitch 3.5mm(THR type)  
W/F, Vertical  
Poles 2p~24p  
ELxx150A0000G\*  
Number of poles

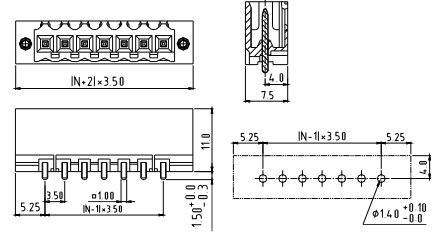



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

**EL**




Pitch 3.5mm(THR type)  
W/F, Right angle  
Poles 2p~24p  
ELxx150B0000G\*  
Number of poles

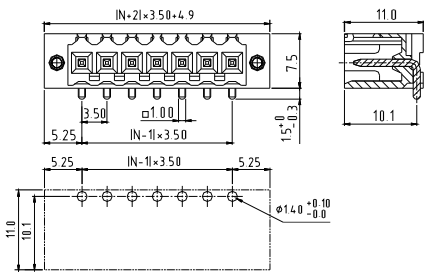



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

**EU**

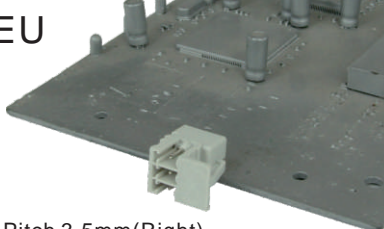


Pitch 3.5mm(Right)  
Poles 3p  
EU0310800000G\*





Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	(  ) pending

**EU**

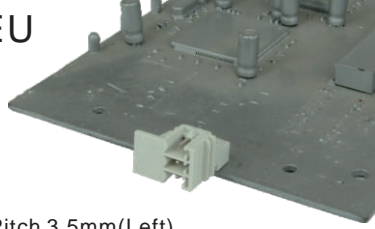


Pitch 3.5mm(Left)  
Poles 3p  
EU0310810000G\*




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	(  ) pending

EU

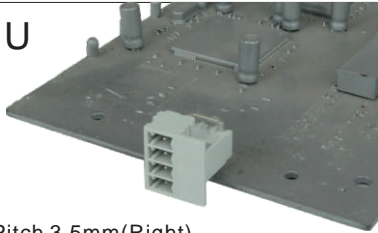


Pitch 3.5mm(Right)  
Poles 4p  
EU041080000G\*




Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: (cULus) pending

EU

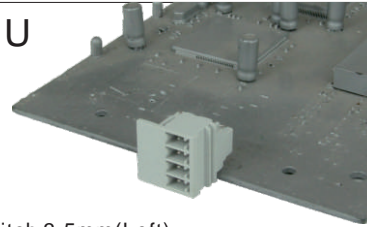


Pitch 3.5mm(Left)  
Poles 4p  
EU0410810000G\*

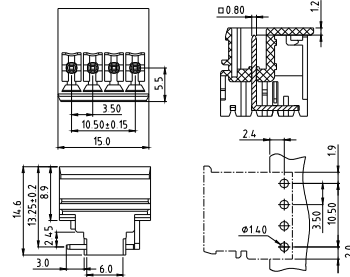


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: (cULus) pending

EU

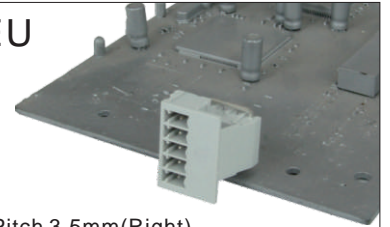

Pitch 3.5mm(Right)  
Poles 5p  
EU0510800000G\*

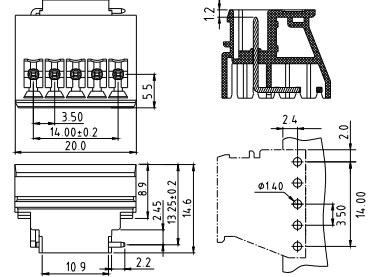


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :


Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: (cULus) pending

E

EU

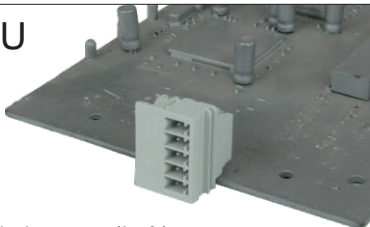

Pitch 3.5mm(Left)  
Poles 5p  
EU0510810000G\*

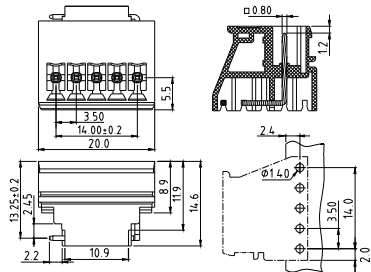


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: (cULus) pending

EU



Pitch 5.0mm(Right)  
Poles 2p  
EU0270500000G\*




Electrical: cULus  
Voltage rating: 300V  
Current rating: 20A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.6KV  
Safety Approval: cULus

EU




Pitch 5.0mm(Left)  
Poles 2p  
EU0270510000G\*

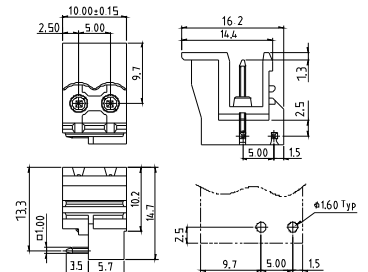


Electrical: cULus  
Voltage rating: 300V  
Current rating: 20A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):

Withstanding Voltage: 1.6KV  
Safety Approval: cULus


**EU**

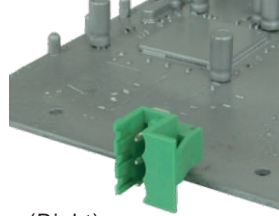


Pitch 5.0mm(Right)  
Poles 3p  
EU0370500000G\*




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	


**EU**

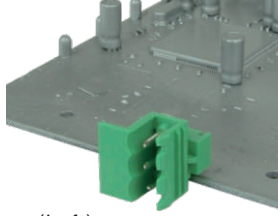


Pitch 5.0mm(Left)  
Poles 3p  
EU0370510000G\*




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	


**EU**

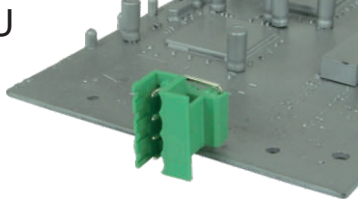


Pitch 5.0mm(Right)  
Poles 4p  
EU0470500000G\*

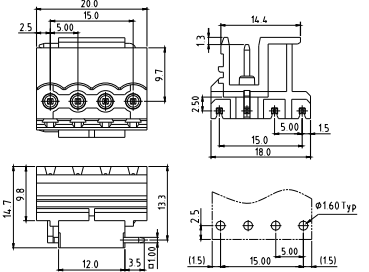


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	


**EU**

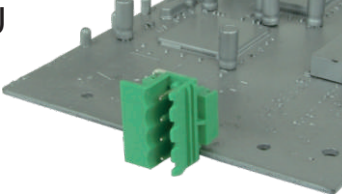


Pitch 5.0mm(Left)  
Poles 4p  
EU0470510000G\*

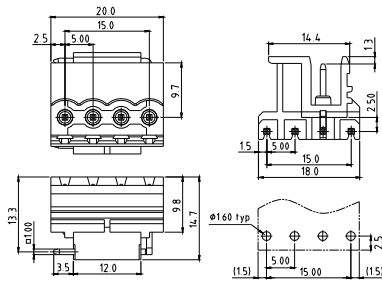


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	

**VK**

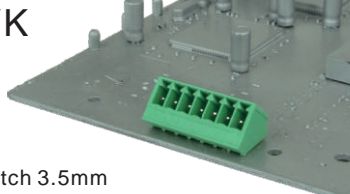


Pitch 3.5mm  
45D  
Poles 2p~24p  
VKxx11500000G\*  
Number of poles

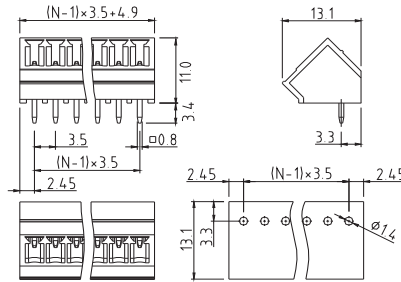


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**VK**



Pitch 3.5mm-W/F  
45D  
Poles 2p~24p  
VKxx12500000G\*  
Number of poles

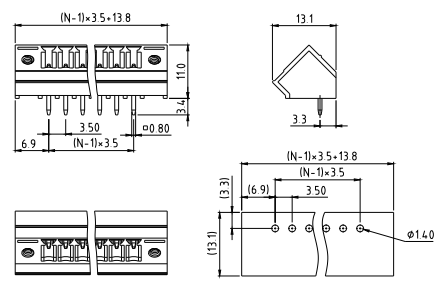


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		


Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		



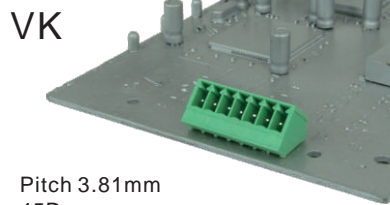

**VK**

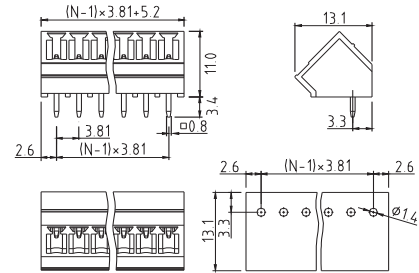


Pitch 3.81mm  
45D  
Poles 2p~24p  
VKxx31500000G\*  
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		



**VK**

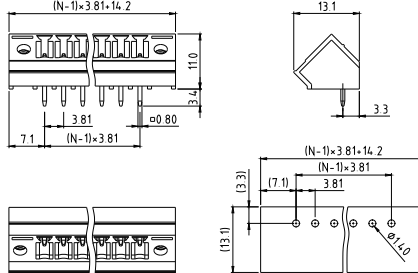


Pitch 3.81mm-W/F  
45D  
Poles 2p~24p  
VKxx32500000G\*  
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

**VK**

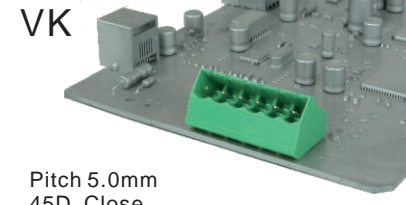


Pitch 5.0mm  
45D, Close  
Poles 2p~24p  
VKxx71500000G\*  
Number of poles

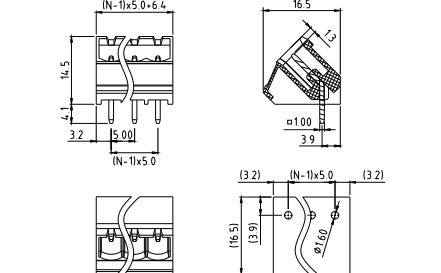


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

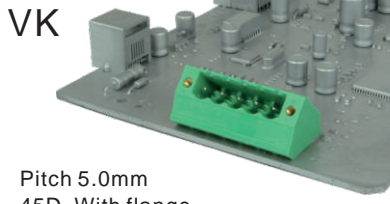

**VK**

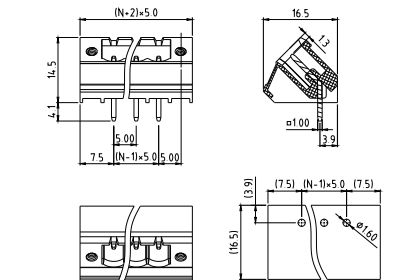


Pitch 5.0mm  
45D, With flange  
Poles 2p~24p  
VKxx72500000G\*  
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

**VK**

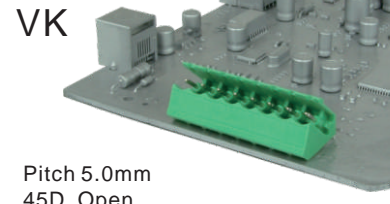


Pitch 5.0mm  
45D, Open  
Poles 2p~24p  
VKxx70500000G\*  
Number of poles

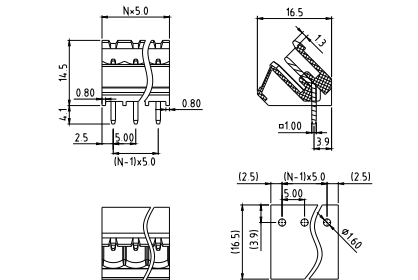


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			


**VK**

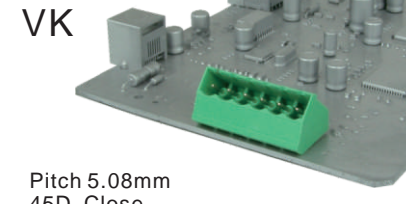


Pitch 5.08mm  
45D, Close  
Poles 2p~24p  
VKxx51500000G\*  
Number of poles

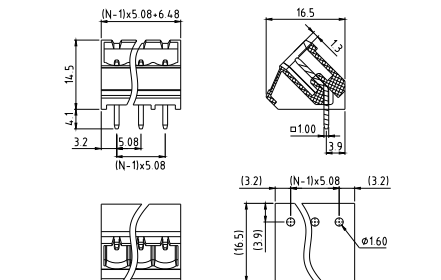

Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			


Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

**VK**

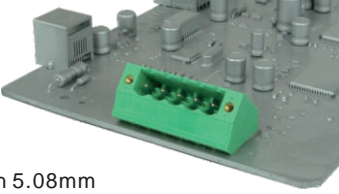


Pitch 5.08mm  
45D, With flange  
Poles 2p~24p  
VKxx52500000G\*  
Number of poles

**VK**



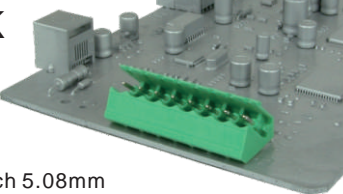


Pitch 5.08mm  
45D, Open  
Poles 2p~24p  
VKxx50500000G\*  
Number of poles

**V7**

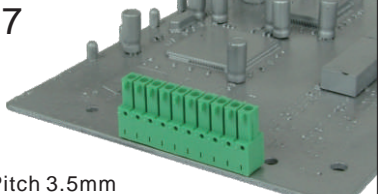

Pitch 3.5mm  
Vertical  
Poles 2p~24p  
V7xx11500000G\*  
Number of poles

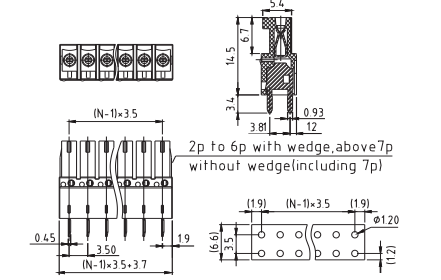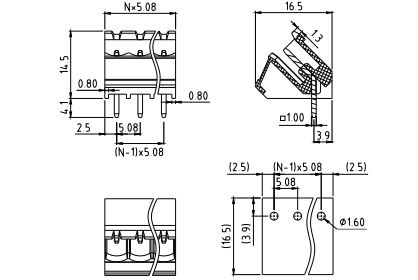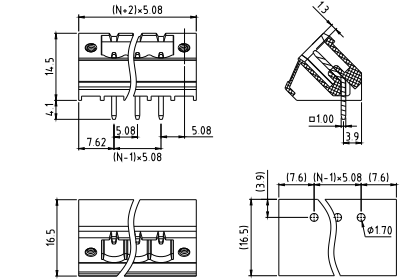

Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Withstanding Voltage: 1.6KV 2.5KV 2.5KV  
Safety Approval:

Withstanding Voltage: 1.6KV 2.5KV 2.5KV  
Safety Approval:


Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

**V7**

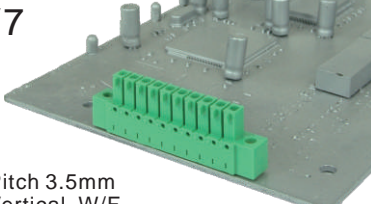


Pitch 3.5mm  
Vertical, W/F  
Poles 2p~24p  
V7xx12500000G\*  
Number of poles

**V7**



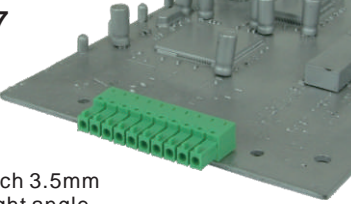


Pitch 3.5mm  
Right angle  
Poles 2p~24p  
V7xx11510000G\*  
Number of poles

**V7**

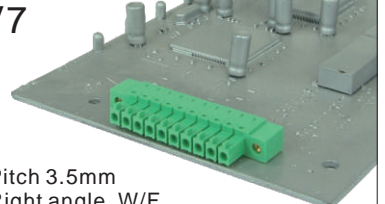

Pitch 3.5mm  
Right angle, W/F  
Poles 2p~24p  
V7xx12510000G\*  
Number of poles

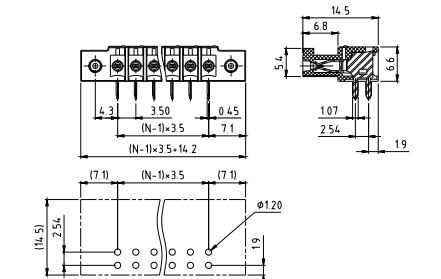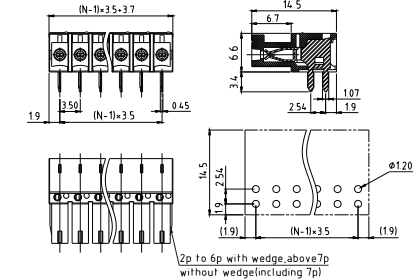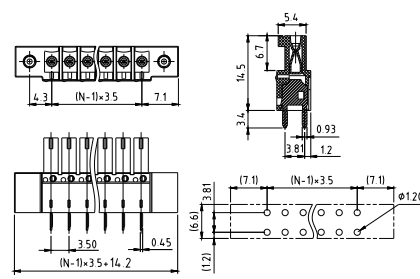

Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:


Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

V7

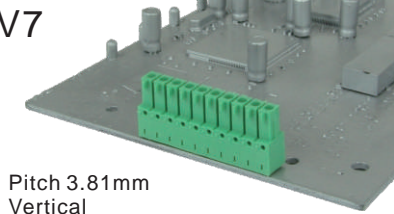


Pitch 3.81mm  
Vertical  
Poles 2p~24p  
V7xx3150000G\*  
Number of poles

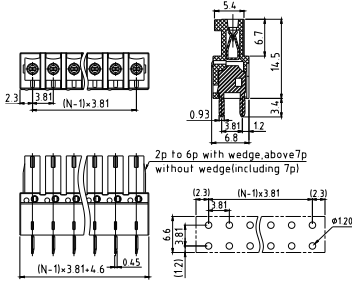


Electrical: cULus  
Voltage rating: 300V  
Current rating: 8A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

V7

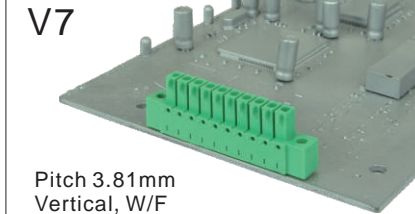


Pitch 3.81mm  
Vertical, W/F  
Poles 2p~24p  
V7xx3250000G\*  
Number of poles

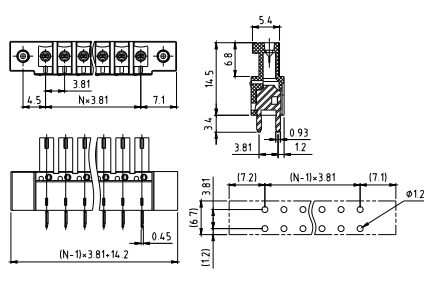


Electrical: cULus  
Voltage rating: 300V  
Current rating: 8A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

V7

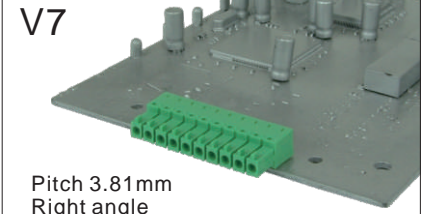


Pitch 3.81mm  
Right angle  
Poles 2p~24p  
V7xx31510000G\*  
Number of poles

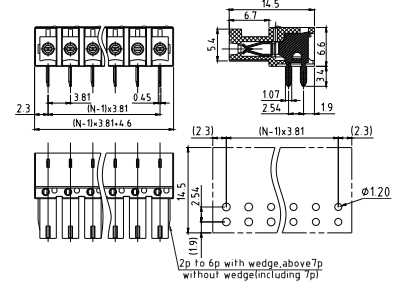


Electrical: cULus  
Voltage rating: 300V  
Current rating: 8A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

V7

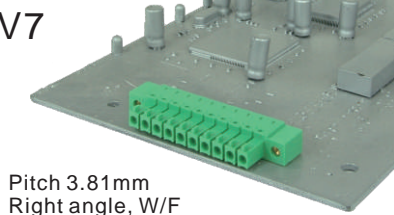


Pitch 3.81mm  
Right angle, W/F  
Poles 2p~24p  
V7xx32510000G\*  
Number of poles

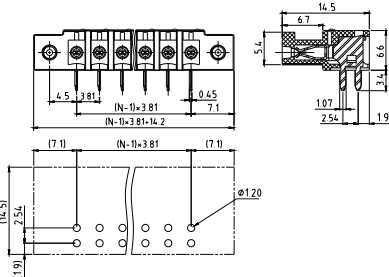


Electrical: cULus  
Voltage rating: 300V  
Current rating: 8A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

V7

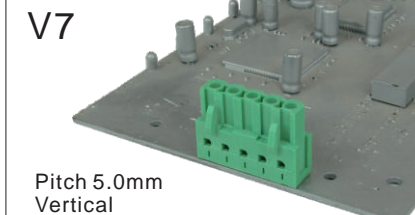


Pitch 5.0mm  
Vertical  
Poles 2p~24p  
V7xx7150000G\*  
Number of poles

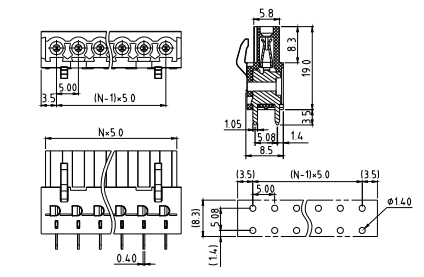


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

V7


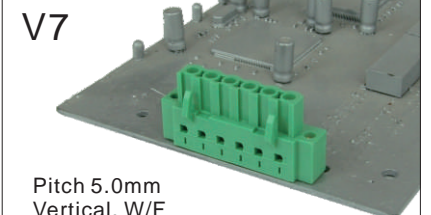


Pitch 5.0mm  
Vertical, W/F  
Poles 2p~24p  
V7xx7250000G\*  
Number of poles


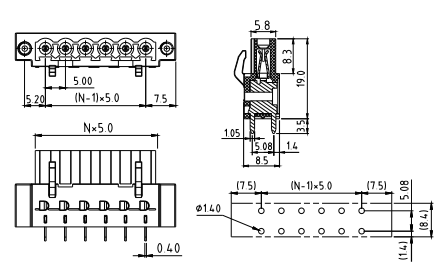


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :



Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval:

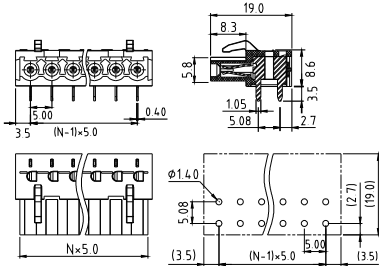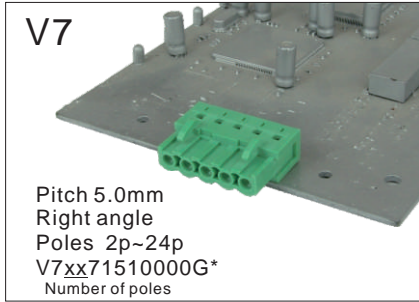



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

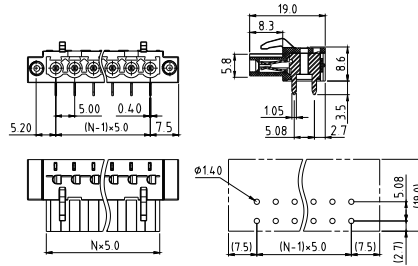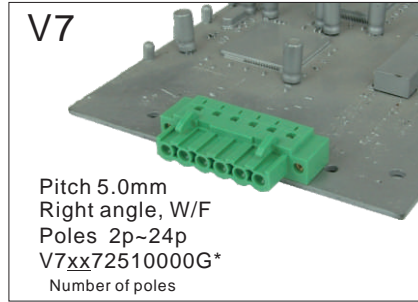



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

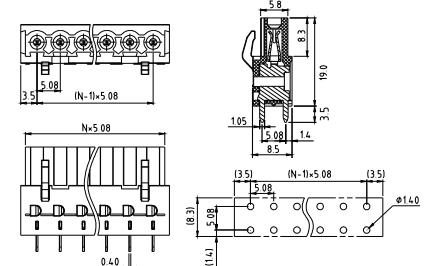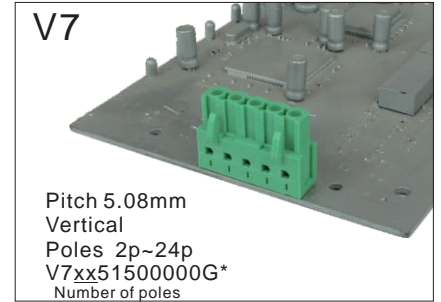



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

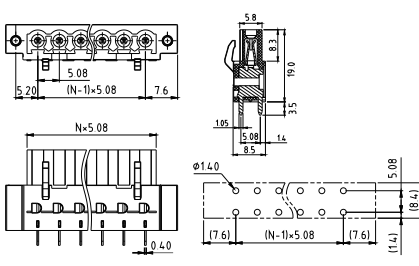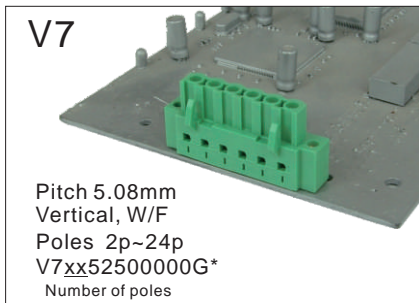

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

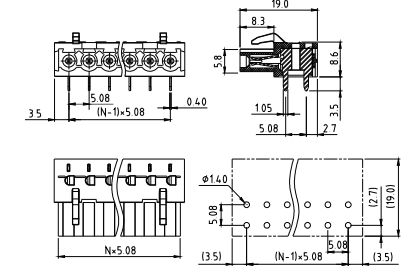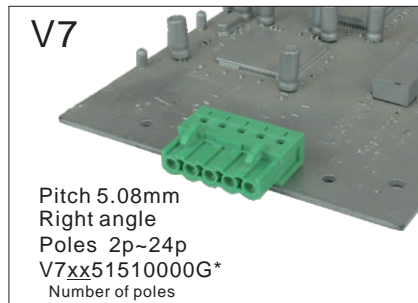

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

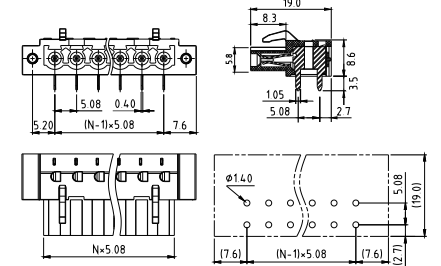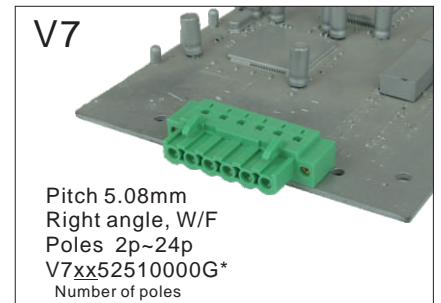


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>


E



V7

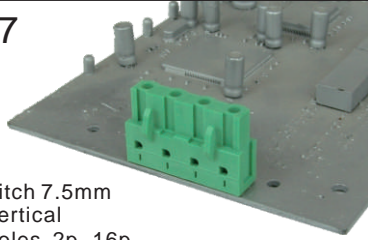


Pitch 7.5mm  
Vertical  
Poles 2p~16p  
V7xxA150000G\*  
Number of poles

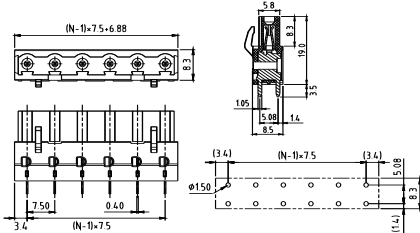


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: **cRUus**

V7

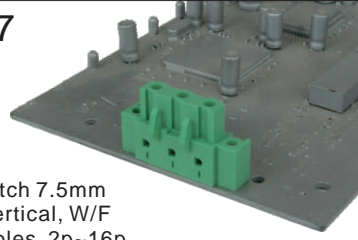


Pitch 7.5mm  
Vertical, W/F  
Poles 2p~16p  
V7xxA250000G\*  
Number of poles

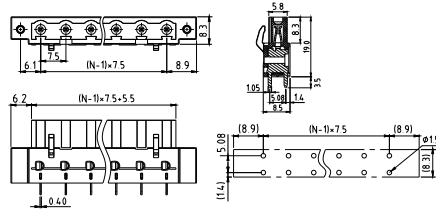


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: **cRUus**

V7

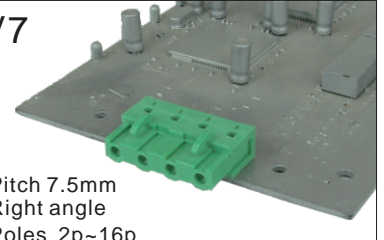


Pitch 7.5mm  
Right angle  
Poles 2p~16p  
V7xxA1510000G\*  
Number of poles

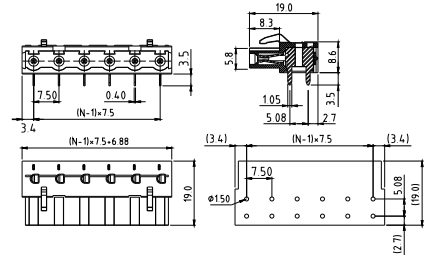


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: **cRUus**

V7

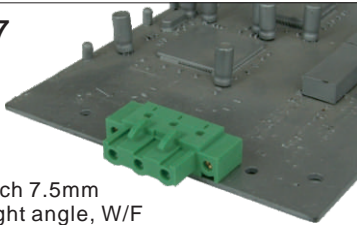


Pitch 7.5mm  
Right angle, W/F  
Poles 2p~16p  
V7xxA2510000G\*  
Number of poles

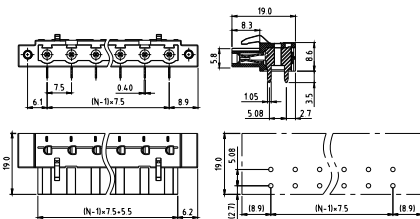


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: **cRUus**

V7

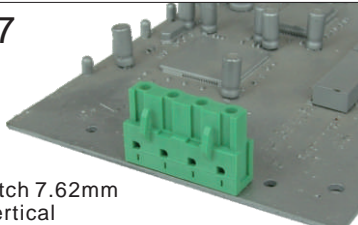


Pitch 7.62mm  
Vertical  
Poles 2p~16p  
V7xx0150000G\*  
Number of poles

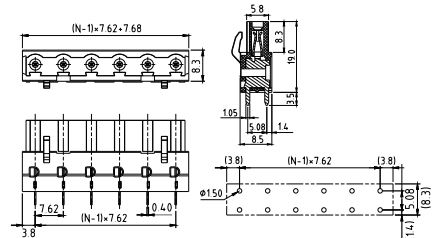


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :

Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: **cRUus**

V7


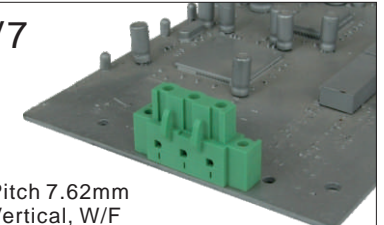


Pitch 7.62mm  
Vertical, W/F  
Poles 2p~16p  
V7xx0250000G\*  
Number of poles


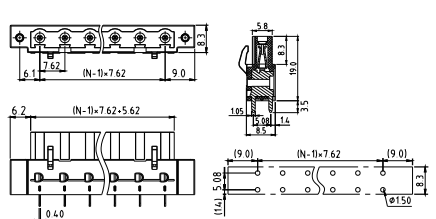


Electrical: cULus  
Voltage rating: 300V  
Current rating: 10A  
Wire range:  
Solid wire(AWG):  
Stranded wire(AWG):  
Torque(Lb-In) :



Screw:  
Wire strip length:  
Withstanding Voltage: 1.6KV  
Safety Approval: **cRUus**

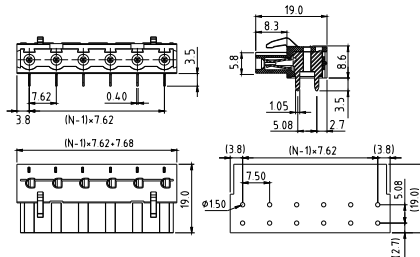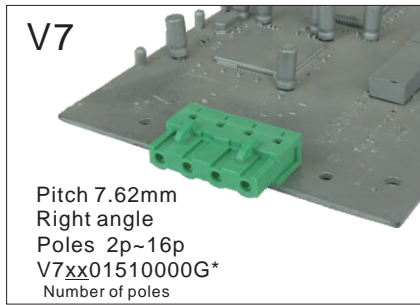



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

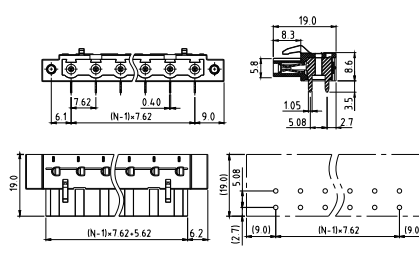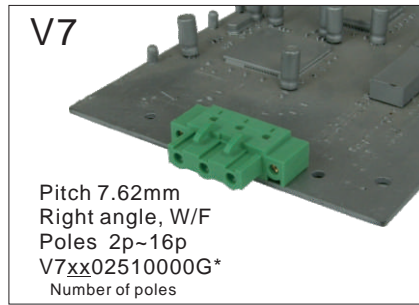



Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	<b>cULus</b>

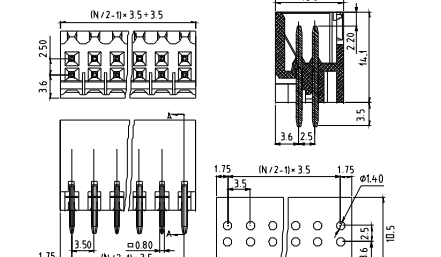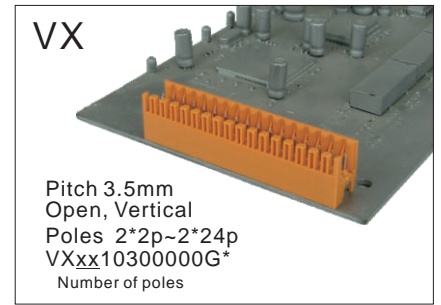



Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

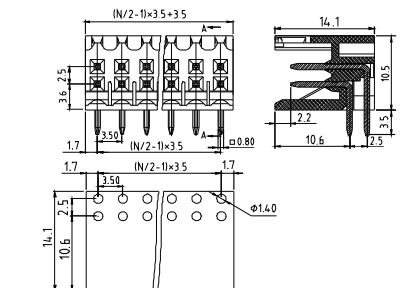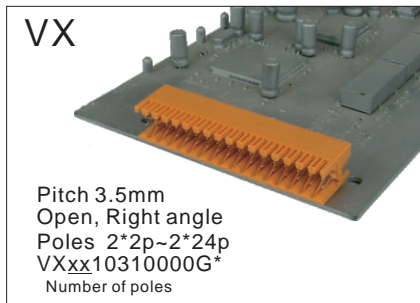

Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

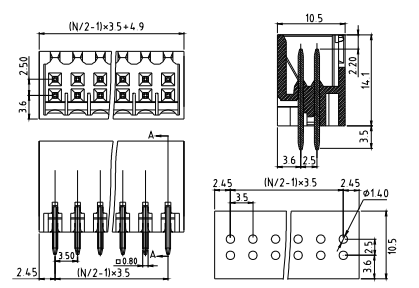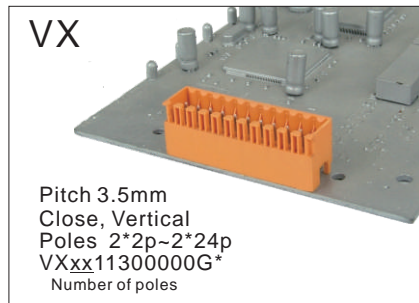


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

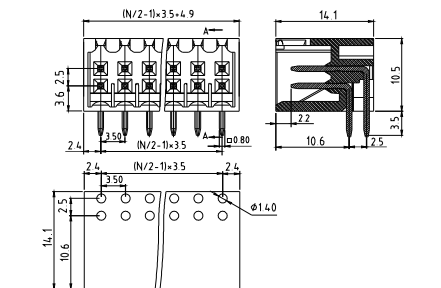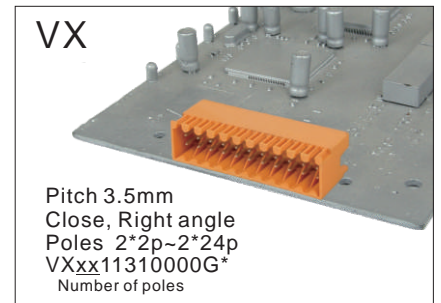


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	<b>cULus</b>

E

**VX**

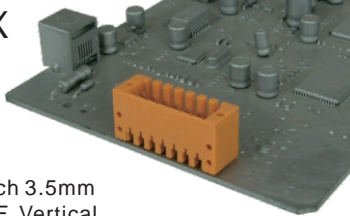


Pitch 3.5mm  
W/F, Vertical  
Poles 2\*2p~2\*24p  
VXxx1230000G\*  
Number of poles

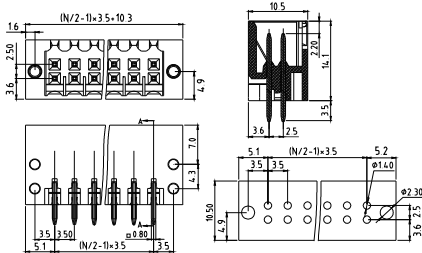


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	

**VX**

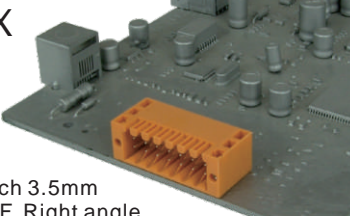


Pitch 3.5mm  
W/F, Right angle  
Poles 2\*2p~2\*24p  
VXxx12310000G\*  
Number of poles

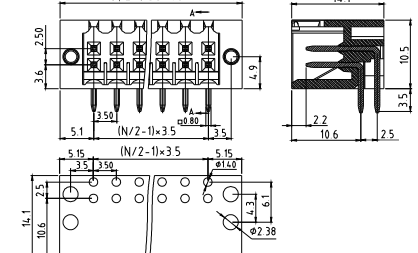


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	

**VX**



Pitch 3.5mm  
Open, Vertical  
Poles 2\*2p~2\*16p  
VXxx100AB000G\*(THR Tape Reel)  
Number of poles

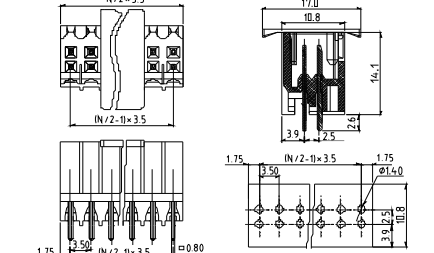


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	

E

**VX**




Pitch 3.5mm  
Open, Right angle  
Poles 2\*2p~2\*16p  
VXxx100BB000G\*(THR Tape Reel)  
Number of poles

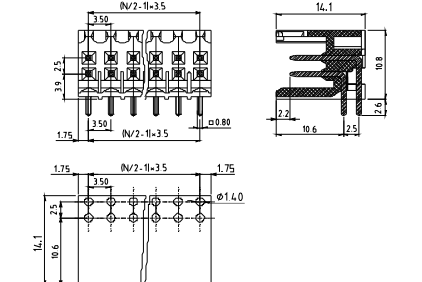


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	

**VX**



Pitch 3.5mm  
Close, Vertical  
Poles 2\*2p~2\*16p  
VXxx110AB000G\*(THR Tape Reel)  
Number of poles

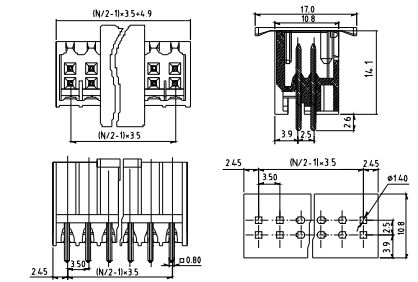


Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	

**VX**



Pitch 3.5mm  
Close, Right angle  
Poles 2\*2p~2\*16p  
VXxx110BB000G\*(THR Tape Reel)  
Number of poles

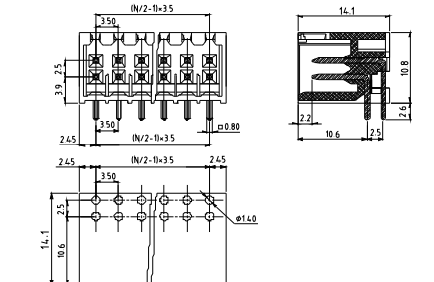

Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.3KV
Safety Approval:	