

Industrial plugs and sockets

Tough & Safe

Plugs



Type P...
63 A, IP44



Type P...W
16 A...125 A, IP67

Connectors



Type C...
63 A, IP44



Type C...W
16 A...125 A, IP67

Inlets



For wall mounting, Type BS...
63 A, IP44



For wall mounting, Type BS...W
16 A...125 A, IP67



For panel mounting with
straight flange, Type ...BU...
63 A, IP44



For panel mounting with
straight flange, Type BU...W
63 A...125 A, IP67



For panel mounting
with angled flange,
Type BAU ...W
16-32 A, IP67

Socket outlet



For wall mounting, Type RS...
63 A, IP44



For wall mounting, Type RS...W
16 A...125 A, IP67



For panel mounting with unified
straight flange, Type RU...
63 A, IP44



For panel mounting with unified
angled flange, Type RAU...
63 A, IP44



For panel mounting with unified
angled flange, Type RAU ...W
16 A...32 A, IP67



For panel mounting with unified
straight flange, Type RU...W
63 A...125 A, IP67

Product overview

Tough & Safe

Tough & Safe is the range for applications in environments that have high demand of functionality and safety. The robust housing is made of PBT plastic. The range Tough & Safe is available as watertight (IP67, 16-125 A) and splashproof (IP44, 63 A).

The devices are equipped with internal and external cable clamps. The 63A and the 125 A devices are equipped with two screws on each terminal.

Features

- IP67 Watertight or IP44 Splashproof
- 16-125 A, 50-690 VAC
- IEC 60 309-1, -2
- All external screws are made of stainless steel

Application examples

- Industry/workshops
- Harbours/shipyards
- Mines
- Food & beverage

Clear marking, at the front and the rear of the terminals
Ground $\perp$
Neutral N
Phase L1, L2, L3

External screws made of stainless steel

Internal and external cable clamp

Clean brass pins

Type: 463P6W


Robust plastic housing that withstands most chemicals found in industrial environments

Rear terminals, raised lettering, identification contacts

Two screws at each terminal to assure safe and reliable cable connection

Watertight chloroprene onion skin grommet

Type: 463C6W

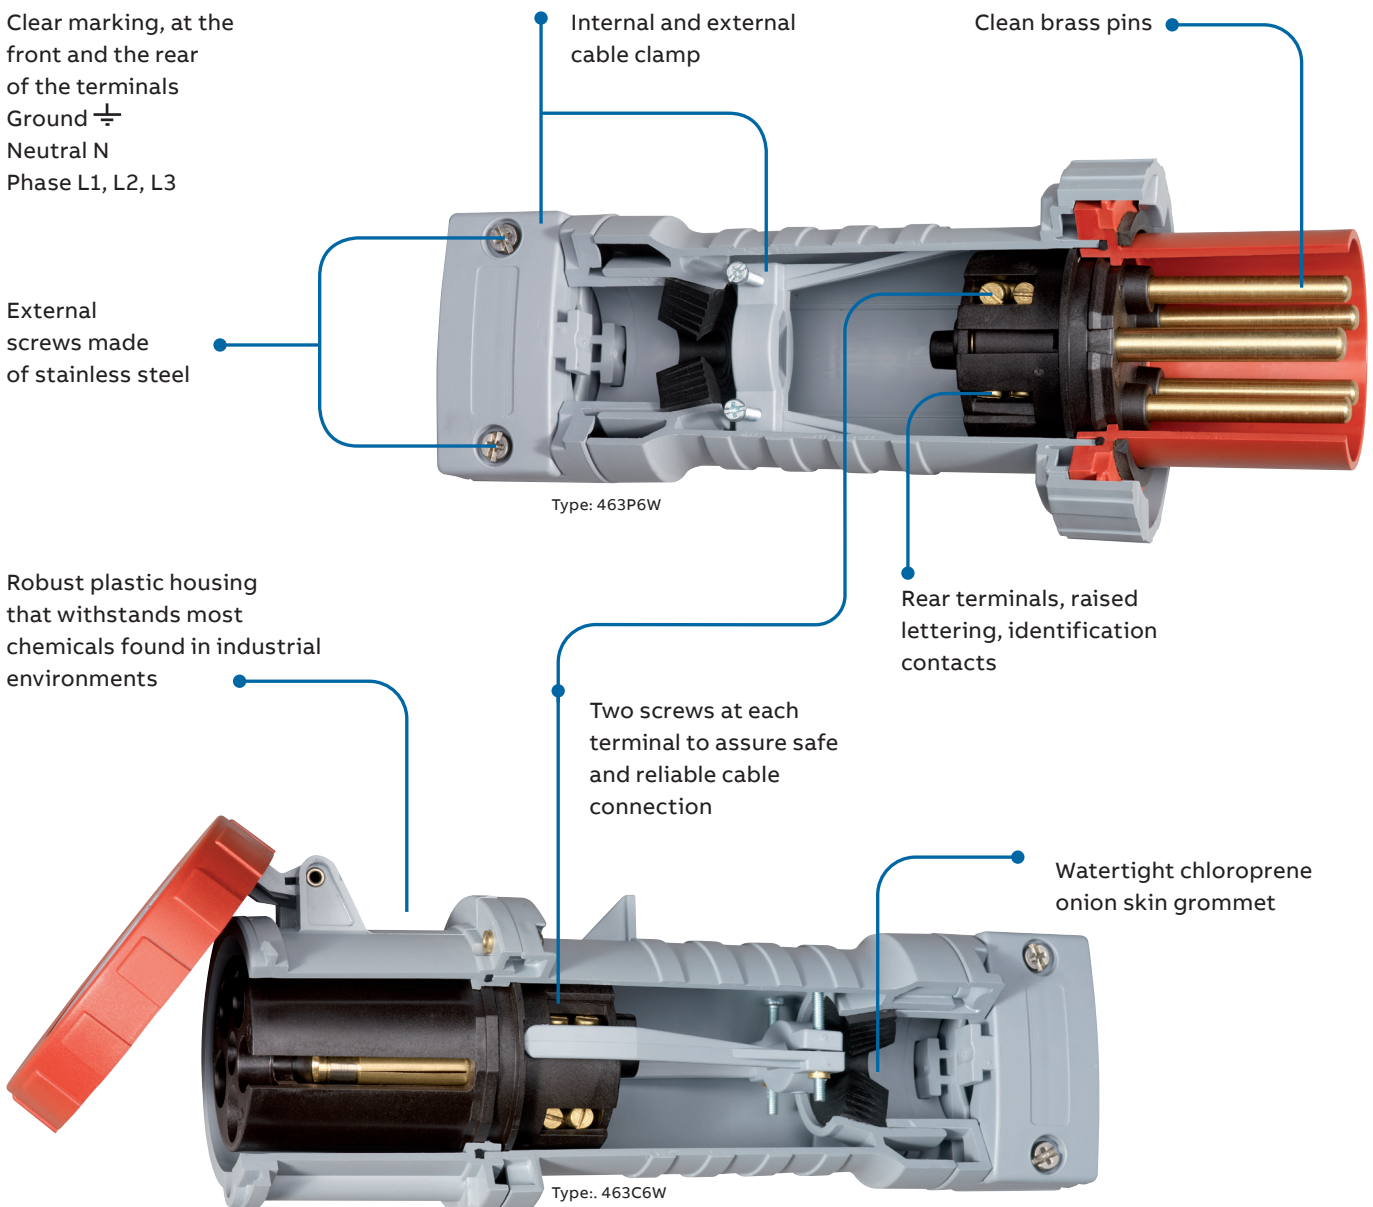

Plugs




463P6

63 A, IP44 Splashproof

Plastic enclosure (PBT). Cable entry with membrane. Cable area 4-16 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				(1pce) kg
2P+E							
3	 Grey		AC	263P1	2CMA166746R1000	1	0.60
	 Yellow	100...130	50 and 60	263P4	2CMA166740R1000		
	 Blue	200...250		263P6	2CMA166742R1000		
	 Blue	200...250		263P9	2CMA166744R1000		
3P+E							
4	 Grey		AC	363P1	2CMA166760R1000	1	0.70
	 Black	600...690	50 and 60	363P5	2CMA166750R1000		
	 Red	380...415		363P6	2CMA166752R1000		
	 Black	480...500		363P7	2CMA166754R1000		
	 Blue	200...250		363P9	2CMA166756R1000		
	 Red	440...460	60	363P11	2CMA166758R1000		
3P+N+E							
5	 Red	346...415	50 and 60	463P6	2CMA166764R1000	1	0.75



Dimensions (mm)

Type	A	B	C	Dmax
263-463P..	215	103	148	35

Plugs




216P6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland. Cable area 1-2.5 mm².


Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	216P1W	2CMA166466R1000	1	0.18
	 Grey	>50...250	DC	216P3W	2CMA166456R1000		
	 Yellow	100...130	50 and 60	216P4W	2CMA166458R1000		
	 Blue	200...250		216P6W	2CMA166460R1000		
	 Red	380...415		216P9W	2CMA166462R1000		
	 Grey	transf		216P12W	2CMA166464R1000		
3P+E							
4	 Grey		AC	316P1W	2CMA166486R1000	1	0.24
	 Green	> 50 V~	>300...500	316P2W	2CMA166468R1000		
	 Red	380/440	50/60	316P3W	2CMA166470R1000		
	 Yellow	100...130	50 and 60	316P4W	2CMA166472R1000		
	 Black	600...690		316P5W	2CMA166474R1000		
	 Red	380...415		316P6W	2CMA166476R1000		
	 Black	480...500		316P7W	2CMA166478R1000		
	 Blue	200...250		316P9W	2CMA166480R1000		
	 Green	> 50 V~	100...300	316P10W	2CMA166482R1000		
	 Red	440...460	60	316P11W	2CMA166484R1000		
3P+N+E							
5	 Grey		AC	416P1W	2CMA166502R1000	1	0.26
	 Green	> 50 V~	>300...500	416P2W	2CMA166488R1000		
	 Yellow	100...130	50 and 60	416P4W	2CMA166492R1000		
	 Black	600...690		416P5W	2CMA126773R1000		
	 Red	346...415		416P6W	2CMA166494R1000		
	 Black	480...500		416P7W	2CMA166496R1000		
	 Blue	208...250		416P9W	2CMA166498R1000		
	 Red	440...460	60	416P11W	2CMA166500R1000		



Dimensions (mm)

Type	A	B	C	Dmax
216P..W	128	71	94	13
316P..W	144	79	111	17
416P..W	146	87	112	17

Plugs




432P6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland. Cable area 2.5-6 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	232P1W	2CMA166728R1000	1	0.28
	 Grey	> 50...250	DC	232P3W	2CMA105986R1000		
	 Yellow	100...130	50 and 60	232P4W	2CMA166504R1000		
	 Blue	200...250		232P6W	2CMA166722R1000		
	 Red	380...415		232P9W	2CMA166724R1000		
	 Grey	transf		232P12W	2CMA166726R1000		
3P+E							
4	 Grey		AC	332P1W	2CMA166516R1000	1	0.30
	 Green	> 50 V~	>300...500	332P2W	2CMA166730R1000		
	 Red	380/440	50/60	332P3W	2CMA166732R1000		
	 Yellow	100...130	50 and 60	332P4W	2CMA166734R1000		
	 Black	600...690		332P5W	2CMA166736R1000		
	 Red	380...415		332P6W	2CMA166738R1000		
	 Black	480...500		332P7W	2CMA166506R1000		
	 Blue	200...250		332P9W	2CMA166508R1000		
	 Green	> 50 V~	100...300	332P10W	2CMA166510R1000		
	 Red	440...460	60	332P11W	2CMA166513R1000		
3P+N+E							
5	 Grey		AC	432P1W	2CMA166532R1000	1	0.32
	 Green	> 50 V~	>300...500	432P2W	2CMA166518R1000		
	 Red	380/440	50/60	432P3W	2CMA166520R1000		
	 Yellow	100...130	50 and 60	432P4W	2CMA166522R1000		
	 Black	600...690		432P5W	2CMA126656R1000		
	 Red	346...415		432P6W	2CMA166524R1000		
	 Black	480...500		432P7W	2CMA166526R1000		
	 Blue	208...250		432P9W	2CMA166528R1000		
	 Red	440...460	60	432P11W	2CMA166530R1000		



Dimensions (mm)

Type	A	B	C	Dmax
232P..W	147	94	105	21.5
332P..W	147	94	105	21.5
432P..W	161	101	119	21.5

Plugs




263P6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland, internal and external cable clamp. Cable area 4-16 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263P1W	2CMA166780R1000	1	0.95
	 Yellow	100...130	50 and 60	263P4W	2CMA166774R1000		
	 Blue	200...250		263P6W	2CMA166776R1000		
	 Red	380...415		263P9W	2CMA166778R1000		
3P+E							
4	 Grey		AC	363P1W	2CMA166794R1000	1	1.05
	 Yellow	100...130	50 and 60	363P4W	2CMA166782R1000		
	 Black	600...690		363P5W	2CMA166784R1000		
	 Red	380...415		363P6W	2CMA166786R1000		
	 Black	480...500		363P7W	2CMA166788R1000		
	 Blue	200...250		363P9W	2CMA166790R1000		
	 Red	440...460	60	363P11W	2CMA166792R1000		
	3P+N+E						
5	 Grey		AC	463P1W	2CMA166806R1000	1	1.15
	 Green	> 50 V~	>300...500	463P2W	2CMA168186R1000		
	 Yellow	100...130	50 and 60	463P4W	2CMA166796R1000		
	 Red	346...415		463P6W	2CMA166798R1000		
	 Black	480...500		463P7W	2CMA166800R1000		
	 Blue	208...250		463P9W	2CMA166802R1000		
	 Red	440...460	60	463P11W	2CMA166804R1000		



Dimensions (mm)

Type	A	B	C	Dmax
263-463P..W	275	114	213	41

Plugs




4125P6W

125 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland, internal and external cable clamp. Cable area 16-50 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125P1W	2CMA166812R1000	1	1.32
	 Yellow	100...130	50 and 60	2125P4W	2CMA166808R1000		
	 Blue	200...250		2125P6W	2CMA166810R1000		
3P+E							
4	 Grey		AC	3125P1W	2CMA166824R1000	1	1.43
	 Yellow	100...130	50 and 60	3125P4W	2CMA166814R1000		
	 Black	600...690		3125P5W	2CMA166815R1000		
	 Red	380...415		3125P6W	2CMA166816R1000		
	 Black	480...500		3125P7W	2CMA166818R1000		
	 Blue	200...250		3125P9W	2CMA166820R1000		
	 Red	440...460	60	3125P11W	2CMA166822R1000		
3P+N+E							
5	 Grey		AC	4125P1W	2CMA166836R1000	1	1.54
	 Yellow	100...130	50 and 60	4125P4W	2CMA166826R1000		
	 Black	600...690		4125P5W	2CMA126658R1000		
	 Red	346...415		4125P6W	2CMA166828R1000		
	 Black	480...500		4125P7W	2CMA166830R1000		
	 Blue	208...250		4125P9W	2CMA166832R1000		
	 Black	440...460	60	4125P11W	2CMA166834R1000		

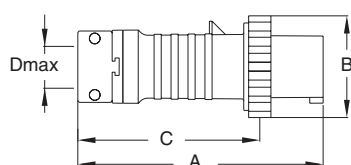

Dimensions (mm)

Type	A	B	C	Dmax
2125-4125P..W	313	130	242	48

Connectors




463C6

63 A, IP44 Splashproof

Plastic enclosure (PBT). Cable entry with membrane. Cable area 4-16 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				(1pce) kg
2P+E							
3	 Grey		AC	263C1	2CMA166844R1000	1	0.80
	 Yellow	100...130	50 and 60	263C4	2CMA166838R1000		
	 Blue	200...250		263C6	2CMA166840R1000		
	 Red	380...415		263C9	2CMA166842R1000		
3P+E							
4	 Grey		AC	363C1	2CMA166858R1000	1	0.83
	 Yellow	100...130	50 and 60	363C4	2CMA166846R1000		
	 Black	600...690		363C5	2CMA166848R1000		
	 Red	380...415		363C6	2CMA166850R1000		
	 Black	480...500		363C7	2CMA166852R1000		
	 Blue	200...250		363C9	2CMA166854R1000		
	 Red	440...460	60	363C11	2CMA166856R1000		
	3P+N+E						
5	 Grey		AC	463C1	2CMA166870R1000	1	0.88
	 Black	600...690	50 and 60	463C5	2CMA126661R1000		
	 Red	346...415		463C6	2CMA166862R1000		
	 Black	480...500		463C7	2CMA166864R1000		
	 Blue	200...250		463C9	2CMA166866R1000		



Dimensions (mm)

Type	A	B	Dmax
263-463C..	224	112	35

Connectors




216C6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland. Cable area 1-2.5 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	216C1W	2CMA166544R1000	1	0.22
	 Grey	>50...250	DC	216C3W	2CMA166534R1000		
	 Yellow	100...130	50 and 60	216C4W	2CMA166536R1000		
	 Blue	200...250		216C6W	2CMA166538R1000		
	 Red	380...415		216C9W	2CMA166540R1000		
	 Grey	transf		216C12W	2CMA166542R1000		
3P+E							
4	 Grey		AC	316C1W	2CMA166564R1000	1	0.31
	 Green	> 50 V~	>300...500	316C2W	2CMA166546R1000		
	 Red	380/440	50/60	316C3W	2CMA166548R1000		
	 Yellow	100...130	50 and 60	316C4W	2CMA166550R1000		
	 Black	600...690		316C5W	2CMA166552R1000		
	 Red	380...415		316C6W	2CMA166554R1000		
	 Black	480...500		316C7W	2CMA166556R1000		
	 Blue	200...250	316C9W	2CMA166558R1000			
	 Green	> 50 V~	100...300	316C10W	2CMA166560R1000		
	 Red	440...460	60	316C11W	2CMA166562R1000		
3P+N+E							
5	 Grey		AC	416C1W	2CMA166580R1000	1	0.32
	 Green	> 50 V~	>300...500	416C2W	2CMA166566R1000		
	 Red	380/440	50/60	416C3W	2CMA166568R1000		
	 Yellow	100...130	50 and 60	416C4W	2CMA166570R1000		
	 Black	600...690		416C5W	2CMA126662R1000		
	 Red	346...415		416C6W	2CMA166572R1000		
	 Black	480...500		416C7W	2CMA166574R1000		
	 Blue	208...250	416C9W	2CMA166576R1000			
	 Red	440...460	60	416C11W	2CMA166578R1000		



Dimensions (mm)

Type	A	B	Dmax
216C..W	151	80	13
316C..W	168	88	17
416C..W	170	97	17

Connectors




432C6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland. Cable area 2.5-6 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	232C1W	2CMA166590R1000	1	0.35
	 Yellow	100...130	50 and 60	232C4W	2CMA166582R1000		
	 Blue	200...250		232C6W	2CMA166584R1000		
	 Red	380...415		232C9W	2CMA166586R1000		
	 Grey	transf			232C12W		
3P+E							
4	 Grey		AC	332C1W	2CMA166592R1000	1	0.38
	 Green	> 50 V~	>300...500	332C2W	2CMA166596R1000		
	 Red	380/440	50/60	332C3W	2CMA166598R1000		
	 Yellow	100...130	50 and 60	332C4W	2CMA166600R1000		
	 Black	600...690		332C5W	2CMA166602R1000		
	 Red	380...415		332C6W	2CMA166604R1000		
	 Black	480...500		332C7W	2CMA166606R1000		
	 Blue	200...250	332C9W	2CMA166608R1000			
	 Green	> 50 V~	100...300	332C10W	2CMA166610R1000		
	 Red	440...460	60	332C11W	2CMA166594R1000		
	3P+N+E						
5	 Grey		AC	432C1W	2CMA166526R1000	1	0.41
	 Green	> 50 V~	>300...500	432C2W	2CMA166612R1000		
	 Red	380/440	50/60	432C3W	2CMA166614R1000		
	 Yellow	100...130	50 and 60	432C4W	2CMA166616R1000		
	 Black	600...690		432C5W	2CMA126663R1000		
	 Red	346...415		432C6W	2CMA166618R1000		
	 Black	480...500		432C7W	2CMA166620R1000		
	 Blue	208...250	432C9W	2CMA166622R1000			
	 Red	440...460	60	432C11W	2CMA166624R1000		



Dimensions (mm)

Type	A	B	Dmax
232C..W	177	102	21.5
332C..W	177	102	21.5
432C..W	182	109	21.5

Connectors




263C6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland. Internal and external cable clamp. Cable area 4-16 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263C1W	2CMA166878R1000	1	0.80
	 Yellow	100...130	50 and 60	263C4W	2CMA166872R1000		
	 Blue	200...250		263C6W	2CMA166874R1000		
	 Red	380...415		263C9W	2CMA166876R1000		
3P+E							
4	 Grey		AC	363C1W	2CMA166902R1000	1	0.83
	 Yellow	100...130	50 and 60	363C4W	2CMA166890R1000		
	 Black	600...690		363C5W	2CMA166892R1000		
	 Red	380...415		363C6W	2CMA166894R1000		
	 Black	480...500		363C7W	2CMA166896R1000		
	 Blue	200...250		363C9W	2CMA166898R1000		
	 Red	440...460	60	363C11W	2CMA166900R1000		
3P+N+E							
5	 Grey		AC	463C1W	2CMA166914R1000	1	0.88
	 Green	> 50 V~	>300...500	463C2W	2CMA168184R1000		
	 Yellow	100...130	50 and 60	463C4W	2CMA166904R1000		
	 Red	346...415		463C6W	2CMA166906R1000		
	 Black	480...500		463C7W	2CMA166908R1000		
	 Blue	208...250		463C9W	2CMA166910R1000		
	 Red	440...460	60	463C11W	2CMA166912R1000		



Dimensions (mm)

Type	A	B	Dmax
263-463C..W	286	111	41

Connectors



4125C6W


125 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with compression gland. Internal and external cable clamp.
LP types with long phase sleeves and pilot contact. Cable area 16-50 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125C1W	2CMA166920R1000	1	1.37
	 Yellow	100...130	50 and 60	2125C4W	2CMA166916R1000		
	 Blue	200...250		2125C6W	2CMA166918R1000		
3P+E							
4	 Grey		AC	3125C1W	2CMA166932R1000	1	1.41
	 Yellow	100...130	50 and 60	3125C4W	2CMA166922R1000		
	 Black	600...690		3125C5W	2CMA166923R1000		
	 Red	380...415		3125C6W	2CMA166924R1000		
	 Red	380...415		3125C6W LP*	2CMA169211R1000		
	 Black	480...500		3125C7W	2CMA166926R1000		
	 Blue	200...250		3125C9W	2CMA166928R1000		
	 Red	440...460	60	3125C11W	2CMA166930R1000		
3P+N+E							
5	 Grey		AC	4125C1W	2CMA166944R1000	1	1.53
	 Yellow	100...130	50 and 60	4125C4W	2CMA166934R1000		
	 Red	346...415		4125C6W	2CMA166936R1000		
	 Red	346...415		4125C6W LP*	2CMA169212R1000		
	 Black	480...500		4125C7W	2CMA166938R1000		
	 Blue	208...250		4125C9W	2CMA166940R1000		
	 Red	440...460	60	4125C11W	2CMA166942R1000		

* LP: These products are equipped with pilot contacts. In all products with pilot contacts according to IEC 60 309-1 and -2, the pilot pin and sleeve are shorter than the other connecting pins and sleeves.

This means that the "pilot circuit" breaks before and connects after the main circuit giving optimum safety. The maximum connection area is 4 mm²



Dimensions (mm)

Type	A	B	Dmax
2125-4125C..W	325	122	48

Surface socket outlets

Plastic enclosed




463RS6

63 A, IP44 Splashproof

Plastic enclosure (PBT). Cable entry M32, alternative rear knock-out. Cable area 6-25 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				(1pce) kg
2P+E							
3	 Grey		AC	263RS1	2CMA167480R1000	1	0.95
	 Yellow	100...130	50 and 60	263RS4	2CMA167474R1000		
	 Blue	200...250		263RS6	2CMA167476R1000		
	 Red	380...415		263RS9	2CMA167478R1000		
3P+E							
4	 Grey		AC	363RS1	2CMA167506R1000	1	0.99
	 Yellow	100...130	50 and 60	363RS4	2CMA167494R1000		
	 Black	600...690		363RS5	2CMA167496R1000		
	 Red	380...415		363RS6	2CMA167498R1000		
	 Black	480...500		363RS7	2CMA167500R1000		
	 Blue	200...250		363RS9	2CMA167502R1000		
	 Red	440...460		363RS11	2CMA167504R1000		
3P+N+E							
5	 Grey		AC	463RS1	2CMA167492R1000	1	1.05
	 Black	600...690	50 and 60	463RS5	2CMA126668R1000		
	 Red	346...415		463RS6	2CMA167484R1000		
	 Black	480...500		463RS7	2CMA167486R1000		
	 Blue	200...250		463RS9	2CMA167488R1000		

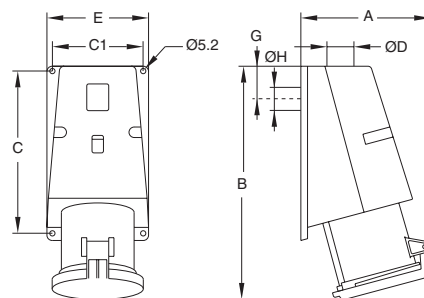

Dimensions (mm)

Type	A	B	C	C1	ØD	E	G	H
263-463RS..	136	254	170	95	M32	107	68	35

Surface socket outlets

Plastic enclosed




216RS6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 25 mm. Cable area 1.5-4 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Yellow	100...130	50 and 60	216RS4W	2CMA167148R1000	1	0.34
	 Blue	200...250		216RS6W	2CMA167149R1000		
	 Red	380...415		216RS9W	2CMA167150R1000		
	 Grey	transf		216RS12W	2CMA167151R1000		
	 Grey		AC	216RS1W	2CMA167152R1000		
3P+E							
4	 Green	> 50 V~	>300...500	316RS2W	2CMA167153R1000	1	0.37
	 Red	380/440	50/60	316RS3W	2CMA167154R1000		
	 Yellow	100...130	50 and 60	316RS4W	2CMA167155R1000		
	 Black	600...690		316RS5W	2CMA167156R1000		
	 Red	380...415		316RS6W	2CMA167157R1000		
	 Black	480...500		316RS7W	2CMA167158R1000		
	 Blue	200...250	316RS9W	2CMA167159R1000			
	 Green	> 50 V~	100...300	316RS10W	2CMA167160R1000		
	 Red	440...460	60	316RS11W	2CMA167161R1000		
	 Grey		AC	316RS1W	2CMA167162R1000		
3P+N+E							
5	 Green	> 50 V~	>300...500	416RS2W	2CMA167163R1000	1	0.40
	 Red	380/440	50/60	416RS3W	2CMA167164R1000		
	 Yellow	100...130	50 and 60	416RS4W	2CMA167165R1000		
	 Black	600...690		416RS5W	2CMA126669R1000		
	 Red	346...415		416RS6W	2CMA167166R1000		
	 Black	480...500		416RS7W	2CMA167167R1000		
	 Blue	208...250	416RS9W	2CMA167168R1000			
	 Red	440...460	60	416RS11W	2CMA167169R1000		
	 Grey		AC	416RS1W	2CMA167170R1000		

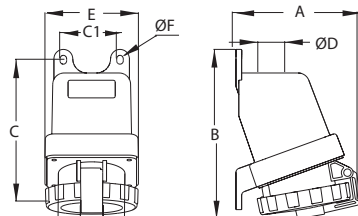

Dimensions (mm)

Type	A	B	C	C1	D	E	G	H
216RS..W	115	172	150	60	60	25	99	6.5
316RS..W	118	170	150	60	60	25	99	6.5
416RS..W	124	169	150	60	60	25	99	6.5

Surface socket outlets

Plastic enclosed




232RS6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 25 mm. Cable area 2.5-10 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Yellow	100...130	50 and 60	232RS4W	2CMA167171R1000	1	0.41
	 Blue	200...250		232RS6W	2CMA167172R1000		
	 Red	380...415		232RS9W	2CMA167173R1000		
	 Grey	transf		232RS12W	2CMA167174R1000		
	 Grey		AC	232RS1W	2CMA167175R1000		
3P+E							
4	 Green	> 50 V~	>300...500	332RS2W	2CMA167176R1000	1	0.43
	 Red	380/440	50/60	332RS3W	2CMA167177R1000		
	 Yellow	100...130	50 and 60	332RS4W	2CMA167178R1000		
	 Black	600...690		332RS5W	2CMA167179R1000		
	 Red	380...415		332RS6W	2CMA167180R1000		
	 Black	480...500		332RS7W	2CMA167181R1000		
	 Blue	200...250		332RS9W	2CMA167182R1000		
	 Green	> 50 V~	100...300	332RS10W	2CMA167183R1000		
	 Red	440...460	60	332RS11W	2CMA167184R1000		
	 Grey		AC	332RS1W	2CMA167185R1000		
3P+N+E							
5	 Green	> 50 V~	>300...500	432RS2W	2CMA167186R1000	1	0.48
	 Red	380/440	50/60	432RS3W	2CMA167187R1000		
	 Yellow	100...130	50 and 60	432RS4W	2CMA167188R1000		
	 Black	600...690		432RS5W	2CMA126670R1000		
	 Red	346...415		432RS6W	2CMA167189R1000		
	 Black	480...500		432RS7W	2CMA167190R1000		
	 Blue	208...250		432RS9W	2CMA167191R1000		
	 Red	440...460	60	432RS11W	2CMA167192R1000		
	 Grey		AC	432RS1W	2CMA167193R1000		

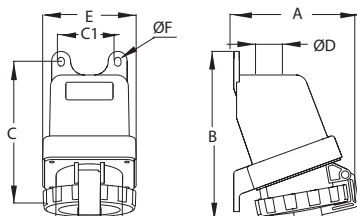

Dimensions (mm)

Type	A	B	C	C1	D	E	G	H
232RS..W	129	178	150	60	6	25	99	6.5
332RS..W	129	178	150	60	60	25	99	6.5
432RS..W	131	178	150	60	60	25	99	6.5

Surface socket outlets

Plastic enclosed




263RS6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 32 mm. Cable area 6-25 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				(1pce) kg
2P+E							
3	 Grey		AC	263RS1W	2CMA167310R1000	1	1.00
	 Yellow	100...130	50 and 60	263RS4W	2CMA167304R1000		
	 Blue	200...250		263RS6W	2CMA167306R1000		
	 Red	380...415		263RS9W	2CMA167308R1000		
3P+E							
4	 Grey		AC	363RS1W	2CMA167324R1000	1	1.07
	 Yellow	100...130	50 and 60	363RS4W	2CMA167312R1000		
	 Black	600...690		363RS5W	2CMA167314R1000		
	 Red	380...415		363RS6W	2CMA167316R1000		
	 Black	480...500		363RS7W	2CMA167318R1000		
	 Blue	200...250		363RS9W	2CMA167320R1000		
	 Red	440...460	60	363RS11W	2CMA167322R1000		
	3P+N+E						
5	 Grey		AC	463RS1W	2CMA167336R1000	1	1.15
	 Yellow	100...130	50 and 60	463RS4W	2CMA167326R1000		
	 Black	600...690		463RS5W	2CMA126671R1000		
	 Red	346...415		463RS6W	2CMA167328R1000		
	 Black	480...500		463RS7W	2CMA167330R1000		
	 Blue	208...250		463RS9W	2CMA167332R1000		
	 Red	440...460	60	463RS11W	2CMA167334R1000		

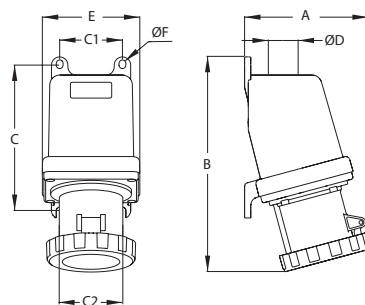

Dimensions (mm)

Type	A	B	C	C1	C2	D	E	F
263-463RS..W	150	263	176	76	76	32	118	8.0

Surface socket outlets

Plastic enclosed




4125RS6W

125 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 50 mm. Cable area 16-70 mm²

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125RS1W	2CMA167248R1000	1	1.45
	 Yellow	100...130	50 and 60	2125RS4W	2CMA167244R1000		
	 Blue	200...250		2125RS6W	2CMA167246R1000		
3P+E							
4	 Grey		AC	3125RS1W	2CMA167260R1000	1	1.55
	 Yellow	100...130	50 and 60	3125RS4W	2CMA167250R1000		
	 Black	600...690		3125RS5W	2CMA167251R1000		
	 Red	380...415		3125RS6W	2CMA167252R1000		
	 Black	480...500		3125RS7W	2CMA167254R1000		
	 Blue	200...250		3125RS9W	2CMA167256R1000		
	 Red	440...460	60	3125RS11W	2CMA167258R1000		
3P+N+E							
5	 Grey		AC	4125RS1W	2CMA167272R1000	1	1.69
	 Yellow	100...130	50 and 60	4125RS4W	2CMA167262R1000		
	 Black	600...690		4125RS5W	2CMA126672R1000		
	 Red	346...415		4125RS6W	2CMA167264R1000		
	 Black	480...500		4125RS7W	2CMA167266R1000		
	 Blue	208...250		4125RS9W	2CMA167268R1000		
	 Red	440...460	60	4125RS11W	2CMA167270R1000		

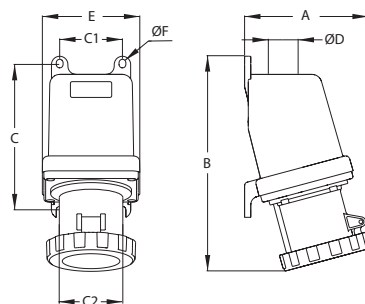

Dimensions (mm)

Type	A	B	C	C1	C2	D	E	F
2125-4125RS..W	171	282	188	102	85	50	145	9.0

Surface socket outlets

For looping




216RL6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry knock-outs 2×Ø 25 mm. Terminal block 2×(2.5-10 mm²). Outlet is connected to terminal block.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	216RL1W	2CMA168461R1000	1	0.63
	 Grey	>50...250	DC	216RL3W	2CMA168456R1000		
	 Yellow	100...130	50 and 60	216RL4W	2CMA168457R1000		
	 Blue	200...250		216RL6W	2CMA168458R1000		
	 Red	380...415		216RL9W	2CMA168459R1000		
	 Grey	transf	DC	216RL12W	2CMA168460R1000		
3P+E							
4	 Grey		AC	316RL1W	2CMA168471R1000	1	0.66
	 Green	> 50 V~	>300...500	316RL2W	2CMA168462R1000		
	 Red	380/440	50/60	316RL3W	2CMA168463R1000		
	 Yellow	100...130	50 and 60	316RL4W	2CMA168464R1000		
	 Black	600...690		316RL5W	2CMA168465R1000		
	 Red	380...415	316RL6W	2CMA168466R1000			
	 Black	480...500	316RL7W	2CMA168467R1000			
	 Blue	200...250	316RL9W	2CMA168468R1000			
	 Green	> 50 V~	100...300	316RL10W	2CMA168469R1000		
	 Red	440...460	60	316RL11W	2CMA168470R1000		
3P+N+E							
5	 Grey		AC	416RL1W	2CMA168479R1000	1	0.68
	 Green	> 50 V~	>300...500	416RL2W	2CMA168472R1000		
	 Red	380/440	50/60	416RL3W	2CMA168473R1000		
	 Yellow	100...130	50 and 60	416RL4W	2CMA168474R1000		
	 Red	346...415		416RL6W	2CMA168475R1000		
	 Black	480...500	416RL7W	2CMA168476R1000			
	 Blue	208...250	416RL9W	2CMA168477R1000			
	 Red	440...460	60	416RL11W	2CMA168478R1000		

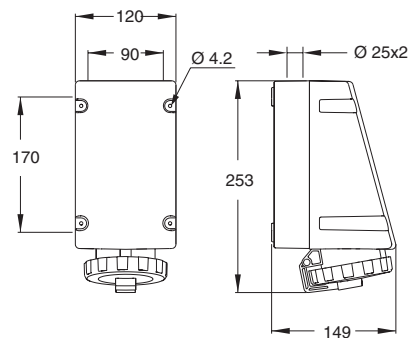

Surface socket outlets

For looping




432RL6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry knock-outs 2xØ 25 mm. Terminal block 2x(2.5-10 mm²). Outlet is connected to terminal block.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	232RL1W	2CMA168484R1000	1	0.69
	 Yellow	100...130	50 and 60	232RL4W	2CMA168480R1000		
	 Blue	200...250		232RL6W	2CMA168481R1000		
	 Red	380...415		232RL9W	2CMA168482R1000		
	 Grey	transf		232RL12W	2CMA168483R1000		
3P+E							
4	 Grey		AC	332RL1W	2CMA168494R1000	1	0.70
	 Green	> 50 V~	>300...500	332RL2W	2CMA168485R1000		
	 Red	380/440	50/60	332RL3W	2CMA168486R1000		
	 Yellow	100...130	50 and 60	332RL4W	2CMA168487R1000		
	 Black	600...690		332RL5W	2CMA168488R1000		
	 Red	380...415		332RL6W	2CMA168489R1000		
	 Black	480...500		332RL7W	2CMA168490R1000		
	 Blue	200...250		332RL9W	2CMA168491R1000		
	 Green	> 50 V~	100...300	332RL10W	2CMA168492R1000		
	 Red	440...460	60	332RL11W	2CMA168493R1000		
3P+N+E							
5	 Grey		AC	432RL1W	2CMA168502R1000	1	0.72
	 Green	> 50 V~	>300...500	432RL2W	2CMA168495R1000		
	 Red	380/440	50/60	432RL3W	2CMA168496R1000		
	 Yellow	100...130	50 and 60	432RL4W	2CMA168497R1000		
	 Red	346...415		432RL6W	2CMA168498R1000		
	 Black	480...500		432RL7W	2CMA168499R1000		
	 Blue	208...250		432RL9W	2CMA168500R1000		
	 Red	440...460	60	432RL11W	2CMA168501R1000		

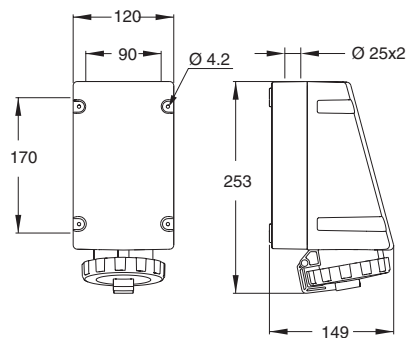

Surface socket outlets

For looping




4125RL6W

125 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry with knock-outs 2×Ø 50/25 mm. Terminal block 2×(16-70 mm²). Outlet is connected to terminal block.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125RL1W	2CMA168528R1000	1	4.00
	 Yellow	100...130	50 and 60	2125RL4W	2CMA168526R1000		
	 Blue	200...250		2125RL6W	2CMA168527R1000		
3P+E							
4	 Grey		AC	3125RL1W	2CMA168534R1000	1	4.10
	 Yellow	100...130	50 and 60	3125RL4W	2CMA168529R1000		
	 Red	380...415		3125RL6W	2CMA168530R1000		
	 Black	480...500		3125RL7W	2CMA168531R1000		
	 Blue	200...250		3125RL9W	2CMA168532R1000		
	 Red	440...460	60	3125RL11W	2CMA168533R1000		
3P+N+E							
5	 Grey		AC	4125RL1W	2CMA168540R1000	1	4.25
	 Yellow	100...130	50 and 60	4125RL4W	2CMA168535R1000		
	 Red	346...415		4125RL6W	2CMA168536R1000		
	 Black	480...500		4125RL7W	2CMA168537R1000		
	 Blue	208...250		4125RL9W	2CMA168538R1000		
	 Red	440...460	60	4125RL11W	2CMA168539R1000		

- 2125 - 4125RL...W can be equipped with sealing up to 70 mm².
- Cable clamps for Al available on request.
- RL...W have terminal block for 2 wire feeding under the same clamp.



2125 - 4125RL..W


Surface inlets



463BS6

63 A, IP44 Splashproof
Plastic enclosure (PBT). M32 alternative rear knock-out cable entry. Cable area 6-25 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263BS1	2CMA167548R1000	1	0.80
	 Yellow	100...130	50 and 60	263BS4	2CMA167542R1000		
	 Blue	200...250		263BS6	2CMA167544R1000		
	 Red	380...415		263BS9	2CMA167546R1000		
3P+E							
4	 Grey		AC	363BS1	2CMA167562R1000	1	0.85
	 Yellow	100...130	50 and 60	363BS4	2CMA167550R1000		
	 Black	600...690		363BS5	2CMA167552R1000		
	 Red	380...415		363BS6	2CMA167554R1000		
	 Black	480...500		363BS7	2CMA167556R1000		
	 Blue	200...250		363BS9	2CMA167558R1000		
	 Red	440...460	60	363BS11	2CMA167560R1000		
3P+N+E							
5	 Grey		AC	463BS1	2CMA167574R1000	1	0.90
	 Black	600...690	50 and 60	463BS5	2CMA126701R1000		
	 Red	346...415		463BS6	2CMA167566R1000		
	 Black	480...500		463BS7	2CMA167568R1000		
	 Blue	200...250		463BS9	2CMA167570R1000		

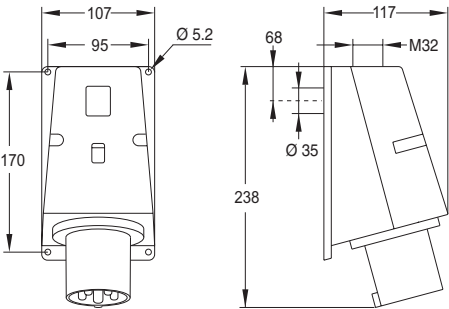

Surface inlets




216BS6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 25 mm. Cable area 1.5-4 mm².


Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	216BS1W	2CMA167050R1000	1	0.36
	 Green	> 50 V~	>300...500	216BS2W	2CMA167051R1000		
	 Yellow	100...130	50 and 60	216BS4W	2CMA167042R1000		
	 Blue	200...250		216BS6W	2CMA167044R1000		
	 Red	380...415		216BS9W	2CMA167046R1000		
	 Grey	transf		216BS12W	2CMA167048R1000		
3P+E							
4	 Grey		AC	316BS1W	2CMA167070R1000	1	0.41
	 Green	> 50 V~	>300...500	316BS2W	2CMA167052R1000		
	 Red	380/440	50/60	316BS3W	2CMA167054R1000		
	 Yellow	100...130	50 and 60	316BS4W	2CMA167056R1000		
	 Black	600...690		316BS5W	2CMA167058R1000		
	 Red	380...415		316BS6W	2CMA167060R1000		
	 Black	480...500		316BS7W	2CMA167062R1000		
	 Blue	200...250		316BS9W	2CMA167064R1000		
	 Green	> 50 V~	100...300	316BS10W	2CMA167066R1000		
	 Red	440...460	60	316BS11W	2CMA167068R1000		
3P+N+E							
5	 Grey		AC	416BS1W	2CMA167086R1000	1	0.43
	 Green	> 50 V~	>300...500	416BS2W	2CMA167072R1000		
	 Red	380/440	50/60	416BS3W	2CMA167074R1000		
	 Yellow	100...130	50 and 60	416BS4W	2CMA167076R1000		
	 Black	600...690		416BS5W	2CMA126774R1000		
	 Red	346...415		416BS6W	2CMA167078R1000		
	 Black	480...500		416BS7W	2CMA167080R1000		
	 Blue	208...250		416BS9W	2CMA167082R1000		
	 Red	440...460	60	416BS11W	2CMA167084R1000		

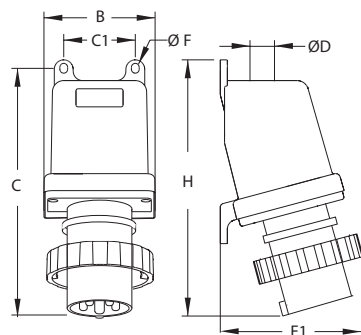

Dimensions (mm)

Type	B	C	C1	D	E1	F	H
216BS..W	99	150	60	28.3	129	06.6	196
316BS..W	99	150	60	28.3	132	06.5	202
416BS..W	99	150	60	28.3	134	06.5	209

Surface inlets

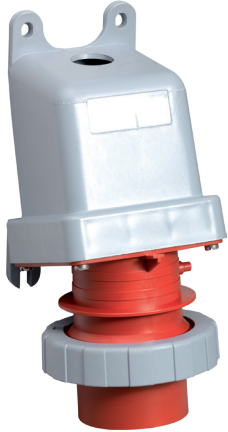


432BS6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 25 mm. Cable area 2.5-10 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	232BS1W	2CMA167096R1000	1	0.44
	 Yellow	100...130	50 and 60	232BS4W	2CMA167088R1000		
	 Blue	200...250		232BS6W	2CMA167090R1000		
	 Red	380...415		232BS9W	2CMA167092R1000		
	 Grey	transf		232BS12W	2CMA167094R1000		
3P+E							
4	 Grey		AC	332BS1W	2CMA167114R1000	1	0.46
	 Green	> 50 V~	>300...500	332BS2W	2CMA167098R1000		
	 Red	380/440	50/60	332BS3W	2CMA167100R1000		
	 Yellow	100...130	50 and 60	332BS4W	2CMA167102R1000		
	 Black	600...690		332BS5W	2CMA167103R1000		
	 Red	380...415		332BS6W	2CMA167104R1000		
	 Black	480...500		332BS7W	2CMA167106R1000		
	 Blue	200...250		332BS9W	2CMA167108R1000		
	 Green	> 50 V~	100...300	332BS10W	2CMA167110R1000		
	 Red	440...460	60	332BS11W	2CMA167112R1000		
3P+N+E							
5	 Grey		AC	432BS1W	2CMA167130R1000	1	0.48
	 Green	> 50 V~	>300...500	432BS2W	2CMA167116R1000		
	 Red	380/440	50/60	432BS3W	2CMA167118R1000		
	 Yellow	100...130	50 and 60	432BS4W	2CMA167120R1000		
	 Black	600...690		432BS5W	2CMA126776R1000		
	 Red	346...415		432BS6W	2CMA167122R1000		
	 Black	480...500		432BS7W	2CMA167124R1000		
	 Blue	208...250		432BS9W	2CMA167126R1000		
	 Red	440...460	60	432BS11W	2CMA167128R1000		

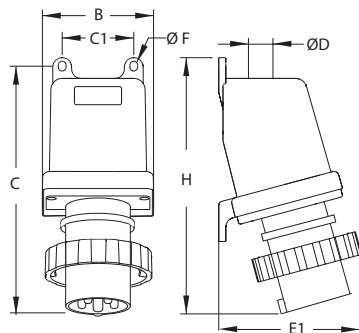

Dimensions (mm)

Type	B	C	C1	D	E1	F	H
232BS..W	99	150	60	28.3	136	6.5	220
332BS..W	99	150	60	28.3	136	6.5	220
432BS..W	99	150	60	28.3	140	6.5	226

Surface inlets




263BS6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 32 mm. Cable area 6-25 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263BS1W	2CMA167344R1000	1	1.20
	 Yellow	100...130	50 and 60	263BS4W	2CMA167338R1000		
	 Blue	200...250		263BS6W	2CMA167340R1000		
	 Red	380...415		263BS9W	2CMA167342R1000		
3P+E							
4	 Grey		AC	363BS1W	2CMA167358R1000	1	1.30
	 Yellow	100...130	50 and 60	363BS4W	2CMA167346R1000		
	 Black	600...690		363BS5W	2CMA167348R1000		
	 Red	380...415		363BS6W	2CMA167350R1000		
	 Black	480...500		363BS7W	2CMA167352R1000		
	 Blue	200...250		363BS9W	2CMA167354R1000		
	 Red	440...460	60	363BS11W	2CMA167356R1000		
	3P+N+E						
5	 Grey		AC	463BS1W	2CMA167370R1000	1	1.40
	 Yellow	100...130	50 and 60	463BS4W	2CMA167360R1000		
	 Black	600...690		463BS5W	2CMA126775R1000		
	 Red	346...415		463BS6W	2CMA167362R1000		
	 Black	480...500		463BS7W	2CMA167364R1000		
	 Blue	208...250		463BS9W	2CMA167366R1000		
	 Red	440...460	60	463BS11W	2CMA167368R1000		



Dimensions (mm)

Type	B	C	C1	D	E1	F	H
263-463BS..W	118	176	76	38	138	8	249

Surface inlets




4125BS6W

125 A, IP67 Watertight

Plastic enclosure (PBT). Cable entry Ø 50 mm. Cable area 16-70 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125BS1W	2CMA167278R1000	1	4.00
	 Yellow	100...130	50 and 60	2125BS4W	2CMA167274R1000		
	 Blue	200...250		2125BS6W	2CMA167276R1000		
3P+E							
4	 Grey		AC	3125BS1W	2CMA167290R1000	1	4.10
	 Yellow	100...130	50 and 60	3125BS4W	2CMA167280R1000		
	 Red	380...415		3125BS6W	2CMA167282R1000		
	 Black	480...500		3125BS7W	2CMA167284R1000		
	 Blue	200...250		3125BS9W	2CMA167286R1000		
	 Red	440...460	60	3125BS11W	2CMA167288R1000		
3P+N+E							
5	 Grey		AC	4125BS1W	2CMA167302R1000	1	4.25
	 Yellow	100...130	50 and 60	4125BS4W	2CMA167292R1000		
	 Black	600...690		4125BS5W	2CMA126705R1000		
	 Red	346...415		4125BS6W	2CMA167294R1000		
	 Black	480...500		4125BS7W	2CMA167296R1000		
	 Blue	208...250		4125BS9W	2CMA167298R1000		
	 Red	440...460	60	4125BS11W	2CMA167300R1000		



Dimensions (mm)

Type	B	C	C1	D	E1	F	H
2125-4125BS..W	145	188	85	47	160	9	265

Panel mounted socket outlets


Unified straight flange



463RU6

63 A, IP44 Splashproof
Plastic enclosure (PBT). Cable area 6-25 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263RU1	2CMA167514R1000	1	0.60
	 Yellow	100...130	50 and 60	263RU4	2CMA167508R1000		
	 Blue	200...250		263RU6	2CMA167510R1000		
3P+E							
4	 Grey		AC	363RU1	2CMA167528R1000	1	0.69
	 Black	600...690	50 and 60	363RU5	2CMA167518R1000		
	 Red	380...415		363RU6	2CMA167520R1000		
	 Black	480...500		363RU7	2CMA167522R1000		
	 Blue	200...250		363RU9	2CMA167524R1000		
3P+N+E							
5	 Grey		AC	463RU1	2CMA167540R1000	1	0.76
	 Black	600...690	50 and 60	463RU5	2CMA126675R1000		
	 Red	346...415		463RU6	2CMA167532R1000		

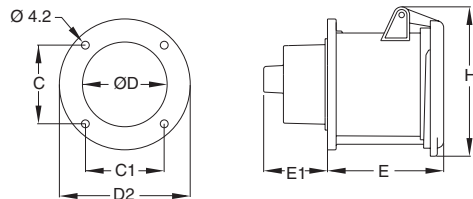

Dimensions (mm)

Type	C	C1	D	D2	E	E1	H
263-463RU..	61	61	70	104	87	48	112

Panel mounted socket outlets

Unified straight flange




263RU6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 6-25 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage V	Frequency Hz	Type	Order Code	Pkg qty	Weight pkg (1pce) kg
2P+E							
3	 Grey		AC	263RU1W	2CMA167378R1000	1	0.64
	 Yellow	100...130	50 and 60	263RU4W	2CMA167372R1000		
	 Blue	200...250		263RU6W	2CMA167374R1000		
	 Red	380...415		263RU9W	2CMA167376R1000		
3P+E							
4	 Grey		AC	363RU1W	2CMA167392R1000	1	0.69
	 Yellow	100...130	50 and 60	363RU4W	2CMA167380R1000		
	 Black	600...690		363RU5W	2CMA167382R1000		
	 Red	380...415		363RU6W	2CMA167384R1000		
	 Black	480...500		363RU7W	2CMA167386R1000		
	 Blue	200...250		363RU9W	2CMA167388R1000		
	 Red	440...460	60	363RU11W	2CMA167390R1000		
3P+N+E							
5	 Grey		AC	463RU1W	2CMA167404R1000	1	0.76
	 Green	> 50 V~	>300...500	463RU2W	2CMA168182R1000		
	 Yellow	100...130	50 and 60	463RU4W	2CMA167394R1000		
	 Black	600...690		463RU5W	2CMA126676R1000		
	 Red	346...415		463RU6W	2CMA167396R1000		
	 Black	480...500		463RU7W	2CMA167398R1000		
	 Blue	208...250		463RU9W	2CMA167400R1000		
	 Red	440...460	60	463RU11W	2CMA167402R1000		

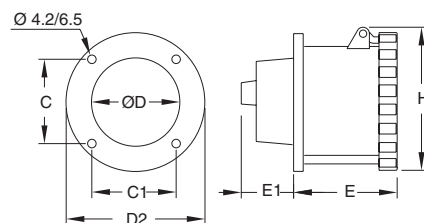

Dimensions (mm)

Type	C	C1	D	D2	E	E1	H
263RU...W...463RU...W	61	61	70	104	89	48	111

Panel mounted socket outlets

Unified straight flange




4125RU6W

125 A, IP67 Watertight

Plastic enclosure (PBT). LP types with long phase sleeves and pilot contact. Cable area 16-70 mm²..

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125RU1W	2CMA167134R1000	1	0.85
	 Yellow	100...130	50 and 60	2125RU4W	2CMA167132R1000		
	 Blue	200...250		2125RU6W	2CMA167133R1000		
	 Blue	200...250		2125RU6W LP	2CMA192729R1000		
3P+E							
4	 Grey		AC	3125RU1W	2CMA167140R1000	1	1.00
	 Yellow	100...130	50 and 60	3125RU4W	2CMA167135R1000		
	 Black	600...690		3125RU5W	2CMA126718R1000		
	 Red	380...415		3125RU6W	2CMA167136R1000		
	 Red	380...415		3125RU6W LP	2CMA192730R1000		
	 Black	480...500		3125RU7W	2CMA167137R1000		
	 Black	480...500		3125RU7W LP	2CMA101865R1000		
	 Blue	200...250		3125RU9W	2CMA167138R1000		
	 Blue	200...250		3125RU9W LP	2CMA101866R1000		
	 Red	440...460	60	3125RU11W	2CMA167139R1000		
	 Red	440...460		3125RU11W LP	2CMA101867R1000		
3P+N+E							
5	 Grey		AC	4125RU1W	2CMA167146R1000	1	1.14
	 Yellow	100...130	50 and 60	4125RU4W	2CMA167141R1000		
	 Red	346...415		4125RU6W	2CMA167142R1000		
	 Red	346...415		4125RU6W LP	2CMA169213R1000		
	 Black	480...500		4125RU7W	2CMA167143R1000		
	 Blue	208...250		4125RU9W	2CMA167144R1000		
	 Red	440...460	60	4125RU11W	2CMA167145R1000		

- Delivered with flange gasket.

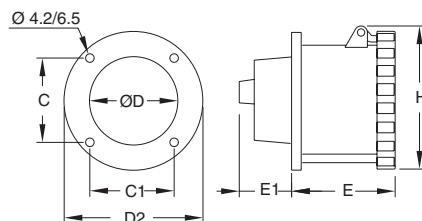


Dimensions (mm)

Type	C	C1	D	D2	E	E1	H
2125RU...W...4125RU..W	71	71	88	115	100	58	122

Panel mounted socket outlets

Unified straight flange



3125RF6W LP

125 A, IP67 Watertight

Thermoplastic enclosure (PBT). Screw calmps. Cable area 16-70 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage V	Frequency Hz	Type	Order Code	Pkg qty	Weight pkg (1pce) kg
2P+E							
3	Blue	200...250	50 and 60	2125RF6W LP	2CMA101881R1000	1	1.2
3P+E							
4	Grey		AC	3125RF1W LP	2CMA101874R1000	1	1.23
	Yellow	100...130	50 and 60	3125RF4W LP	2CMA101875R1000		
	Black	600...690		3125RF5W LP	2CMA101876R1000		
	Red	380...415		3125RF6W LP	2CMA101877R1000		
	Black	480...500		3125RF7W LP	2CMA101878R1000		
	Blue	200...250		3125RF9W LP	2CMA101879R1000		
	Red	440...460	60	3125RF11W LP	2CMA101880R1000		
3P+N+E							
5	Green	> 50 V~	>300...500	4125RF2W LP	2CMA101871R1000	1	1.3
	Red	200/346... 240/415	50 and 60	4125RF6W LP	2CMA101870R1000		
	Blue	120/208... 144/250		4125RF9W LP	2CMA101872R1000		
	Red	250/440... 265/460	60	4125RF11W LP	2CMA101873R1000		

These products are equipped with pilot contacts. In all products with pilot contacts according to IEC 60 309-1 and -2, the pilot pin and sleeve are shorter than the other connecting pins and sleeves.

This means that the "pilot circuit" breaks before and connects after the main circuit giving optimum safety. The maximum connection area is 4 mm².

Panel mounted socket outlets

Unified angled flange




463RAU6

63 A, IP44 Splashproof

Plastic enclosure (PBT). Cable area 6-25 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263RAU1	2CMA167412R1000	1	0.60
	 Yellow	100...130	50 and 60	263RAU4	2CMA167406R1000		
	 Blue	200...250		263RAU6	2CMA167408R1000		
3P+E							
4	 Grey		AC	363RAU1	2CMA167426R1000	1	0.63
	 Black	600...690	50 and 60	363RAU5	2CMA167416R1000		
	 Red	380...415		363RAU6	2CMA167418R1000		
	 Black	480...500		363RAU7	2CMA167420R1000		
	 Blue	200...250		363RAU9	2CMA167422R1000		
3P+N+E							
5	 Grey		AC	463RAU1	2CMA167438R1000	1	0.69
	 Black	600...690	50 and 60	463RAU5	2CMA126680R1000		
	 Red	346...415		463RAU6	2CMA167430R1000		
	 Blue	200...250		463RAU9	2CMA101700R1000		

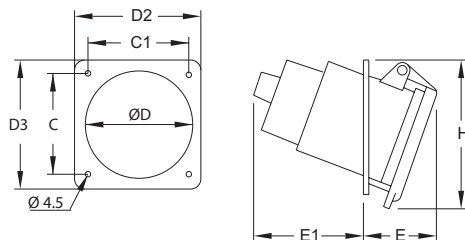

Dimensions (mm)

Type	C	C1	D	D2	D3	E	E1	H
263-463RAU..	84	80	92	100	104	62	73	111

Panel mounted socket outlets

Unified angled flange




216RAU6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 1.5-4 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	216RAU1W	2CMA167002R1000	1	0.12
	 Yellow	100...130	50 and 60	216RAU4W	2CMA166994R1000		
	 Blue	200...250		216RAU6W	2CMA166996R1000		
	 Red	380...415		216RAU9W	2CMA166998R1000		
	 Grey	transf		216RAU12W	2CMA167000R1000		
3P+E							
4	 Grey		AC	316RAU1W	2CMA167022R1000	1	0.15
	 Green	> 50 V~	>300...500	316RAU2W	2CMA167004R1000		
	 Red	380/440	50/60	316RAU3W	2CMA167006R1000		
	 Yellow	100...130	50 and 60	316RAU4W	2CMA167008R1000		
	 Black	600...690		316RAU5W	2CMA167010R1000		
	 Red	380...415		316RAU6W	2CMA167012R1000		
	 Black	480...500		316RAU7W	2CMA167014R1000		
	 Blue	200...250		316RAU9W	2CMA167016R1000		
	 Green	> 50 V~	100...300	316RAU10W	2CMA167018R1000		
	 Red	440...460	60	316RAU11W	2CMA167020R1000		
3P+N+E							
5	 Grey		AC	416RAU1W	2CMA167038R1000	1	0.18
	 Green	> 50 V~	>300...500	416RAU2W	2CMA167024R1000		
	 Red	380/440	50/60	416RAU3W	2CMA167026R1000		
	 Yellow	100...130	50 and 60	416RAU4W	2CMA167028R1000		
	 Black	600...690		416RAU5W	2CMA126681R1000		
	 Red	346...415		416RAU6W	2CMA167030R1000		
	 Black	480...500		416RAU7W	2CMA167032R1000		
	 Blue	208...250		416RAU9W	2CMA167034R1000		
	 Red	440...460	60	416RAU11W	2CMA167036R1000		

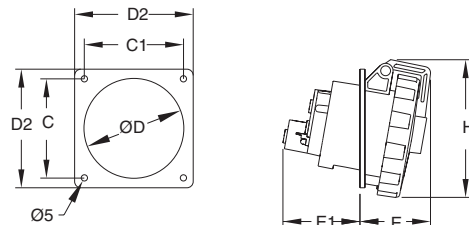

Dimensions (mm)

Type	C	C1	D	D2	E	E1	H
216RAU..W	79.5	79.5	83	95	45	57	95
316RAU..W	79.5	79.5	83	95	45	57	95
416RAU..W	79.5	79.5	83	95	47	57	99

Panel mounted socket outlets

Unified angled flange




432RAU6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 2.5-10 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight pkg (1pce)
		V	Hz				kg
2P+E							
3	 Grey		AC	232RAU1W	2CMA166954R1000	1	0.19
	 Yellow	100...130	50 and 60	232RAU4W	2CMA166946R1000		
	 Blue	200...250		232RAU6W	2CMA166948R1000		
	 Red	380...415		232RAU9W	2CMA166950R1000		
	 Grey	transf		232RAU12W	2CMA166952R1000		
3P+E							
4	 Grey		AC	332RAU1W	2CMA166974R1000	1	0.21
	 Green	> 50 V~	>300...500	332RAU2W	2CMA166956R1000		
	 Red	380/440	50/60	332RAU3W	2CMA166958R1000		
	 Yellow	100...130	50 and 60	332RAU4W	2CMA166960R1000		
	 Black	600...690		332RAU5W	2CMA166962R1000		
	 Red	380...415		332RAU6W	2CMA166964R1000		
	 Black	480...500		332RAU7W	2CMA166966R1000		
	 Blue	200...250		332RAU9W	2CMA166968R1000		
	 Green	> 50 V~	100...300	332RAU10W	2CMA166970R1000		
	 Red	440...460	60	332RAU11W	2CMA166972R1000		
3P+N+E							
5	 Grey		AC	432RAU1W	2CMA166990R1000	1	0.26
	 Green	> 50 V~	>300...500	432RAU2W	2CMA166976R1000		
	 Red	380/440	50/60	432RAU3W	2CMA166978R1000		
	 Yellow	100...130	50 and 60	432RAU4W	2CMA166980R1000		
	 Black	600...690		432RAU5W	2CMA126682R1000		
	 Red	346...415		432RAU6W	2CMA166982R1000		
	 Black	480...500		432RAU7W	2CMA166984R1000		
	 Blue	208...250		432RAU9W	2CMA166986R1000		
	 Red	440...460	60	432RAU11W	2CMA166988R1000		

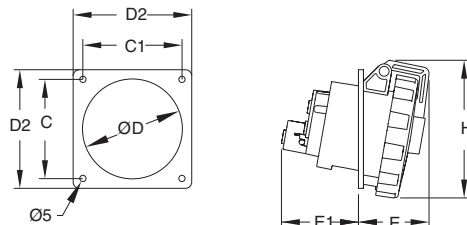

Dimensions (mm)

Type	C	C1	D	D2	E	E1	H
232RAU..W	79.5	79.5	83	95	56	61	104
332RAU..W	79.5	79.5	83	95	56	61	104
432RAU..W	79.5	79.5	83	95	56	62	111

Panel mounted socket outlets

Unified angled flange




463RAU6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 6-25 mm². With pilot contact.

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight pkg (1pce)
		V	Hz				kg
2P+E							
3	 Grey		AC	263RAU1W	2CMA167446R1000	1	0.60
	 Yellow	100...130	50 and 60	263RAU4W	2CMA167440R1000		
	 Blue	200...250		263RAU6W	2CMA167442R1000		
	 Red	380...415		263RAU9W	2CMA167444R1000		
3P+E							
4	 Grey		AC	363RAU1W	2CMA167460R1000	1	0.63
	 Yellow	100...130	50 and 60	363RAU4W	2CMA167448R1000		
	 Black	600...690		363RAU5W	2CMA167450R1000		
	 Red	380...415		363RAU6W	2CMA167452R1000		
	 Black	480...500		363RAU7W	2CMA167454R1000		
	 Blue	200...250		363RAU9W	2CMA167456R1000		
	 Red	440...460	60	363RAU11W	2CMA167458R1000		
3P+N+E							
5	 Grey		AC	463RAU1W	2CMA167472R1000	1	0.69
	 Yellow	100...130	50 and 60	463RAU4W	2CMA167462R1000		
	 Black	600...690		463RAU5W	2CMA126683R1000		
	 Red	346...415		463RAU6W	2CMA167464R1000		
	 Black	480...500		463RAU7W	2CMA167466R1000		
	 Blue	208...250		463RAU9W	2CMA167468R1000		
	 Red	440...460	60	463RAU11W	2CMA167470R1000		

- Delivered with flange gasket.

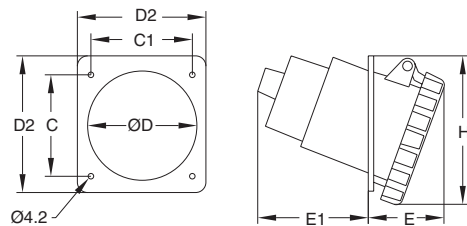

Dimensions (mm)

Type	C	C1	D	D2	E	E1	H
263-463RAU..W	84	80	92	104	61	71	115

Panel mounted socket inlets

Straight flange




463BU6

63 A, IP44 Splashproof

Plastic enclosure (PBT). Cable area 6-25 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce)
							kg
2P+E							
3	 Grey		AC	263BU1	2CMA167216R1000	1	0.50
	 Blue	200...250	50 and 60	263BU6	2CMA167212R1000		
3P+E							
4	 Grey		AC	363BU1	2CMA167230R1000	1	0.55
	 Black	600...690	50 and 60	363BU5	2CMA167220R1000		
	 Red	380...415		363BU6	2CMA167222R1000		
	 Blue	200...250		363BU9	2CMA167226R1000		
3P+N+E							
5	 Grey		AC	463BU1	2CMA167242R1000	1	0.60
	 Red	346...415	50 and 60	463BU6	2CMA167234R1000		

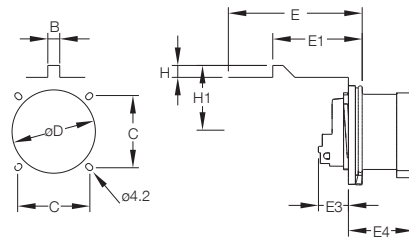

Dimensions (mm)

Type	B	C	D	E	E1	E3	E4	H	H1
263-463BU..	11	61	70	105	62.0	50.0	78.0	9	49.5

Panel mounted socket inlets

Straight flange




263BU6W

63 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 6-25 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	263BU1W	2CMA168106R1000	1	0.50
	 Yellow	100...130	50 and 60	263BU4W	2CMA168103R1000		
	 Blue	200...250		263BU6W	2CMA168104R1000		
	 Red	380...415		263BU9W	2CMA168105R1000		
3P+E							
4	 Grey		AC	363BU1W	2CMA168113R1000	1	0.55
	 Yellow	100...130	50 and 60	363BU4W	2CMA168107R1000		
	 Black	600...690		363BU5W	2CMA168108R1000		
	 Red	380...415		363BU6W	2CMA168109R1000		
	 Black	480...500		363BU7W	2CMA168110R1000		
	 Blue	200...250		363BU9W	2CMA168111R1000		
	 Red	440...460	60	363BU11W	2CMA168112R1000		
3P+N+E							
5	 Grey		AC	463BU1W	2CMA168119R1000	1	0.60
	 Green	> 50 V~	>300...500	463BU2W	2CMA168180R1000		
	 Yellow	100...130	50 and 60	463BU4W	2CMA168114R1000		
	 Black	600...690		463BU5W	2CMA100859R1000		
	 Red	346...415		463BU6W	2CMA168115R1000		
	 Black	480...500		463BU7W	2CMA168116R1000		
	 Blue	208...250		463BU9W	2CMA168117R1000		
	 Red	440...460	60	463BU11W	2CMA168118R1000		

- Delivered with flange gasket.

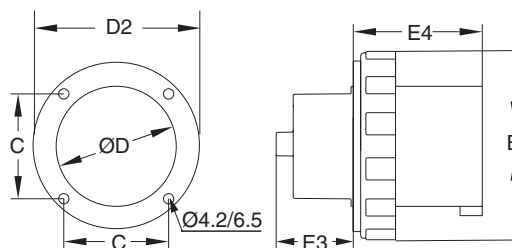


Dimensions (mm)

Type	B	C	D	D2	E3	E4
263-463BU..W	112	61	70	98	50	80

Panel mounted socket inlets

Straight flange




4125BU6W

125 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 16-70 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	2125BU1W	2CMA167196R1000	1	0.78
	 Yellow	100...130	50 and 60	2125BU4W	2CMA167194R1000		
	 Blue	200...250		2125BU6W	2CMA167195R1000		
3P+E							
4	 Grey		AC	3125BU1W	2CMA167202R1000	1	0.84
	 Yellow	100...130	50 and 60	3125BU4W	2CMA167197R1000		
	 Black	600...690		3125BU5W	2CMA126719R1000		
	 Red	380...415		3125BU6W	2CMA167198R1000		
	 Black	480...500		3125BU7W	2CMA167199R1000		
	 Blue	200...250		3125BU9W	2CMA167200R1000		
	 Red	440...460	60	3125BU11W	2CMA167201R1000		
3P+N+E							
5	 Grey		AC	4125BU1W	2CMA167208R1000	1	0.96
	 Yellow	100...130	50 and 60	4125BU4W	2CMA167203R1000		
	 Red	380...415		4125BU6W	2CMA167204R1000		
	 Black	480...500		4125BU7W	2CMA167205R1000		
	 Blue	208...250		4125BU9W	2CMA167206R1000		
	 Red	440...460	60	4125BU11W	2CMA167207R1000		

- Delivered with flange gasket.

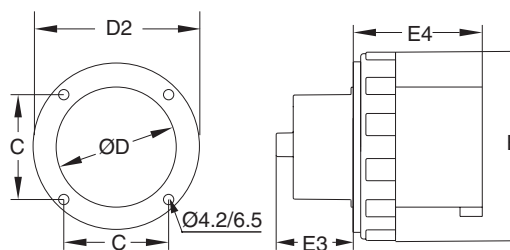


Dimensions (mm)

Type	B	C	D	D2	E3	E4
2125-4125BU..W	122	71	81	118	56	89

Panel mounted socket inlets

Angled flange




216BAU6W

16 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 1.5-4 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	216BAU1W	2CMA166684R1000	1	0.14
	 Grey	>50...250	DC	216BAU3W	2CMA166674R1000		
	 Yellow	100...130	50 and 60	216BAU4W	2CMA166676R1000		
	 Blue	200...250		216BAU6W	2CMA166678R1000		
	 Red	380...415		216BAU9W	2CMA166680R1000		
	 Grey	transf	216BAU12W	2CMA166682R1000			
3P+E							
4	 Grey		AC	316BAU1W	2CMA166704R1000	1	0.19
	 Green	> 50 V~	>300...500	316BAU2W	2CMA166686R1000		
	 Red	380/440	50/60	316BAU3W	2CMA166688R1000		
	 Yellow	100...130	50 and 60	316BAU4W	2CMA166690R1000		
	 Black	600...690		316BAU5W	2CMA166692R1000		
	 Red	380...415		316BAU6W	2CMA166694R1000		
	 Black	480...500	316BAU7W	2CMA166696R1000			
	 Blue	200...250	316BAU9W	2CMA166698R1000			
	 Green	> 50 V~	100...300	316BAU10W	2CMA166700R1000		
	 Red	440...460	60	316BAU11W	2CMA166702R1000		
3P+N+E							
5	 Grey		AC	416BAU1W	2CMA166720R1000	1	0.21
	 Green	> 50 V~	>300...500	416BAU2W	2CMA166706R1000		
	 Red	380/440	50/60	416BAU3W	2CMA166708R1000		
	 Yellow	100...130	50 and 60	416BAU4W	2CMA166710R1000		
	 Red	346...415		416BAU6W	2CMA166712R1000		
	 Black	480...500		416BAU7W	2CMA166714R1000		
	 Blue	208...250	416BAU9W	2CMA166716R1000			
	 Red	440...460	60	416BAU11W	2CMA166718R1000		

- Delivered with flange gasket.

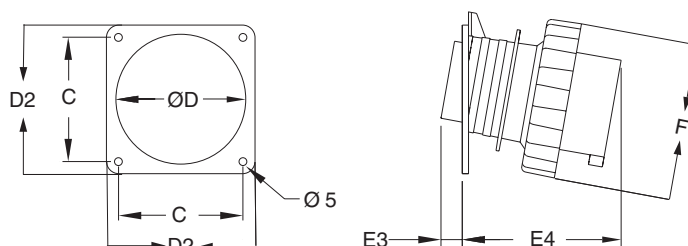

Dimensions (mm)

Type	C	D	D2	E3	E4	F
216BAU..W	79.5	83	95	10	47	71
316BAU..W	79.5	83	95	10	53	79
416BAU..W	79.5	83	95	10	87	87

Panel mounted socket inlets

Angled flange




432BAU6W

32 A, IP67 Watertight

Plastic enclosure (PBT). Cable area 2.5-10 mm².

Terminals/ Poles	Color code	Voltage	Frequency	Type	Order Code	Pkg qty	Weight
		V	Hz				pkg (1pce) kg
2P+E							
3	 Grey		AC	232BAU1W	2CMA166636R1000	1	0.22
	 Yellow	100...130	50 and 60	232BAU4W	2CMA166628R1000		
	 Blue	200...250		232BAU6W	2CMA166630R1000		
	 Red	380...415		232BAU9W	2CMA166632R1000		
	 Grey	transf		232BAU12W	2CMA166634R1000		
3P+E							
4	 Grey		AC	332BAU1W	2CMA166656R1000	1	0.84
	 Green	> 50 V~	>300...500	332BAU2W	2CMA166638R1000		
	 Red	380/440	50/60	332BAU3W	2CMA166640R1000		
	 Yellow	100...130	50 and 60	332BAU4W	2CMA166642R1000		
	 Black	600...690		332BAU5W	2CMA166644R1000		
	 Red	380...415		332BAU6W	2CMA166646R1000		
	 Black	480...500		332BAU7W	2CMA166648R1000		
	 Blue	200...250		332BAU9W	2CMA166650R1000		
	 Green	> 50 V~	100...300	332BAU10W	2CMA166652R1000		
	 Red	440...460	60	332BAU11W	2CMA166654R1000		
3P+N+E							
5	 Grey		AC	432BAU1W	2CMA166672R1000	1	0.96
	 Green	> 50 V~	>300...500	432BAU2W	2CMA166658R1000		
	 Red	380/440	50/60	432BAU3W	2CMA166660R1000		
	 Yellow	100...130	50 and 60	432BAU4W	2CMA166662R1000		
	 Red	346...415		432BAU6W	2CMA166664R1000		
	 Black	480...500		432BAU7W	2CMA166666R1000		
	 Blue	208...250		432BAU9W	2CMA166668R1000		
	 Red	440...460	60	432BAU11W	2CMA166670R1000		

- Delivered with flange gasket.

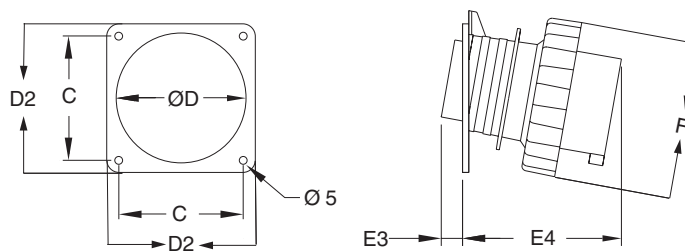

Dimensions (mm)

Type	C	D	D2	E3	E4	F
232BAU..W	79.5	83	95	12	60	94
332BAU..W	79.5	83	95	12	60	94
432BAU..W	79.5	83	95	12	67	101

Industrial plugs and sockets

Accessories



Plug blocker

Lockout/tagout for plugs and inlets. Can be used for any IEC 60309-1 and 60309-2 plug or inlet, both IP44 and IP67 products.

To fit	Order details		Pack qty
	Type code	Order code	pc.
Plugs 16 – 125A Panel mounted inlets 16 – 125 Surface mounted inlets 16 – 125 A	CLF 16 – 125 *	2CMA179237R1000	1

*Indicates standard product.



Protective cover 16 – 125 A, IP44/67

Material in EPDM Rubber

For inlet and plug	Order details		Pack qty
	Type code	Order code	pc.
16 A, 2P+E	GP216 *	2CMA164993R1000	1
16 A, 3P+E	GP316 *	2CMA164994R1000	1
16 A, 3P+N+E	GP416 *	2CMA164995R1000	1
32 A, 2P+E and 3P+E	GP232/332 *	2CMA164996R1000	1
32A, 3P+N+E	GP432 *	2CMA164997R1000	1
63 A, 2P+E, 3P+E and 3P+N+E	GP63 *	2CMA164998R1000	1
125 A, 2P+E, 3P+E and 3P+N+E	GP125 *	2CMA164999R1000	1

*Indicates standard product.



Padlock unit

Padlock unit suitable for all plugs and sockets with handle. Shackle for up to 6 padlocks.

	Order details		Pack qty
	Type code	Order code	pc.
Plugs and sockets with handle	L6	2CMA144539R1000	10

*Indicates standard product.



Blanking plug for 16 – 32 A, IP44


Material in Polyethylene

Metric M20 and M25


For wall mounted sockets	Order details		Pack qty
	Type code	Order code	pc.
For 16A RS and BS	Blanking plug M20X1,5 grey	2CMA197686R1000	1
For 32A RS and BS For 16-32A MHS, MM and CUE	Blanking plug M25X1,5 grey	2CMA197687R1000	1

Industrial plugs and sockets

Spare parts



Gasket BR3416



Gasket RAU1632

Gasket 16 – 125 A, IP44

Material in Chloroprene and Polyethylene
Adhesive

Suitable for Type, Amp, terminals	Order details		Pack qty
	Type code	Order code	pc.
RAM 16 A, 2P+E	Gasket RM216*	2CMA170049R1000	1
RAM 16 A, 2P+E and 3P+E	Gasket RM3416*	2CMA170050R1000	1
RAM 32 A, 2P+E, 3P+E, 3P+N+E	Gasket RM32*	2CMA170051R1000	1
RAM 63 A, 2P+E, 3P+E, 3P+N+E	Gasket 63A*	2CMA178036R1000	1
RAM 125 A, 2P+E, 3P+E, 3P+N+E, for flange	Gasket RMF 125A*	2CMA178203R1000	1
RAM 125 A, 2P+E, 3P+E, 3P+N+E, for socket	Gasket RMS 125A*	2CMA178207R1000	1
R/B 16 A, 2P+E	Gasket BR216	2CMA193458R1000	1
R/B 16 A, 3P+E, 3P+N+E	Gasket BR3416	2CMA193459R1000	1
RU/BU 16-32 A, 2P+E, 3P+E, 3P+N+E	Gasket BRU1632	2CMA193460R1000	1
RAU 16 A, 2P+E	Gasket RA216	2CMA193461R1000	1
RAU 16-32 A, 2P+E, 3P+E, 3P+N+E	Gasket RAU1632	2CMA193463R1000	1

* Indicates made of Chloroprene