


2 POWERBLOK™ Press-Fit Type

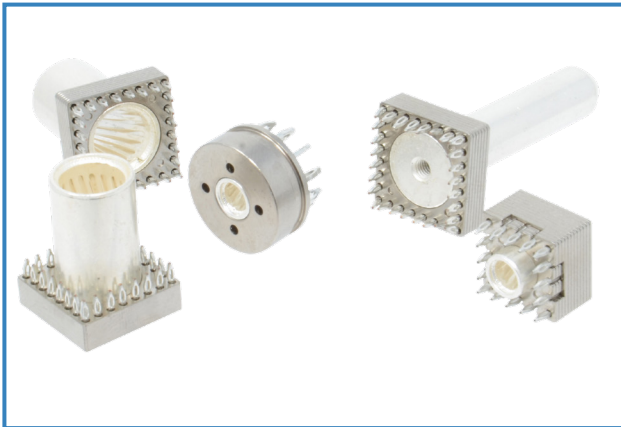


Technical Information

- Accessory plastic lead-in cap available
- Eye-of-the-needle compliant pin
- Tube or tray packaging
- Contact plating available in gold and silver
- Operating temperatures range: -40~125 C
- Durability: 100+ mating cycles

Application

Easily configured to fit any applications



POWERBLOK™ (Press-Fit) Product Data

POWERBLOK™ Type	Example	Part Number	Rated Current	Application	Mated Part
Above Board (Press-Fit)		Configured to customer applications	35~400+A		Configured to customer applications
Thru Board 1 (Press-Fit)					
Thru Board 2 (Press-Fit)		ST_2.4mm: C10-707897-001 ST_3.0mm: C10-700300-001 ST_6.0mm: C10-729762-001 or configured to customer applications	35~120+A		Configured to customer applications
Thru Board 3 (Press-Fit)		ST_3.6mm HD: Configured to customer applications	35~70+A		Configured to customer applications