


4

PGY™

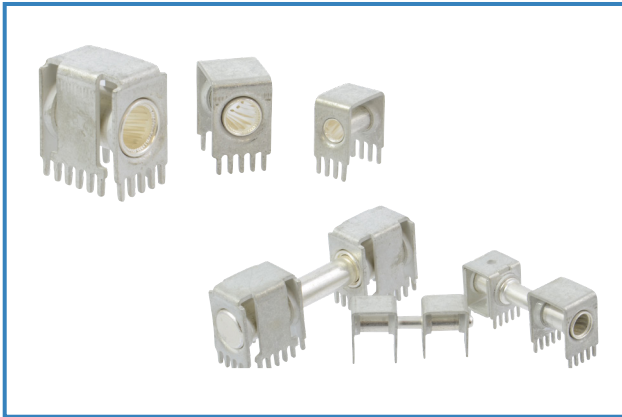

Technical Information

- Orthogonal, co-planar & right angle connections between PCBs or PCB to busbar
- Legs of the PGY distribute high power evenly
- Available in plastic cover for insulating
- Operating temperatures range: -40~125°C
- Durability: 100+ mating cycles

Application

Power to Board, Datacom, Server, Telecom



PGY™ Product Data

PGY™ Type	Example	Sizes	Rated Current	Application	Mated Part
Above Board (Solder)		3.6mm, 5.7mm	35~120+A		Configured to customer applications
Above Board HD Version (Solder)		ST_3.6mm HD: Configured to customer applications	35~70+A		
Thru Board (Solder)		8.0mm, 10.3mm	200~350+A		