
## PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 46230	08/21	
			SEE PDM

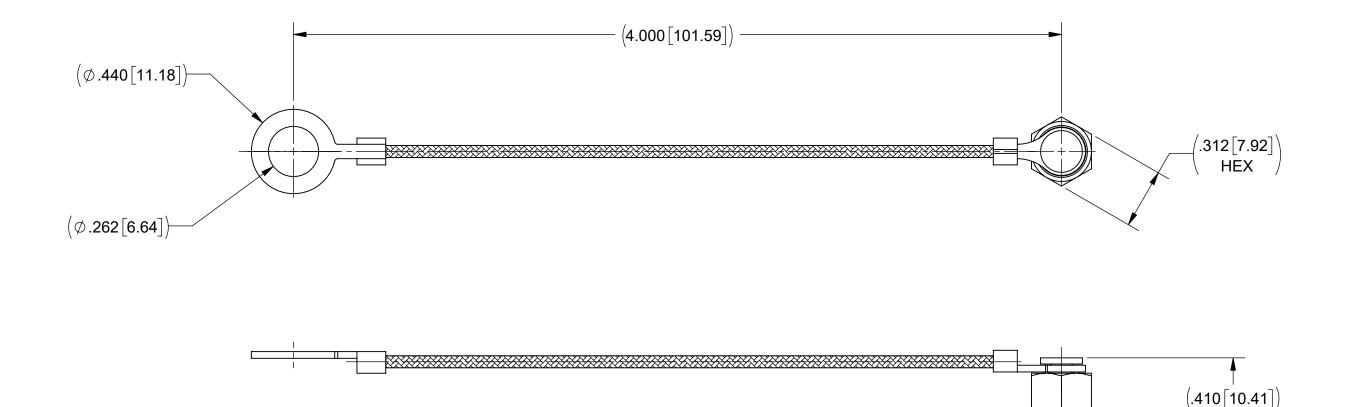

## **MATERIAL**:

RIVET, BODY & **COUPLING NUT:** 

STAINLESS STEEL PER AMS-5640.

ALLOY UNS S30300, TYPE 1: OR ASTM A582 TYPE 303, COND. A

**TERMINALS:** STAINLESS STEEL TYPE 304

LOCK RING: BERYLLIUM COPPER PER ASTM B194, B196, OR B197,

ALLOY No. UNS C17200 OR C17300

GASKET: SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 60/70

Ø1/16" BLACK NYLON CORD PER MIL-C-43307 OR EQUIVALENT **NYLON ROPE:** 

FINISH:

RIVET, BODY & **COUPLING NUT, &** 

**TERMINALS:** BLACK CHROMIUM PER MIL-C-14538 MATERIAL: SEE NOTES FINISH: SEE NOTES SURFACE AREA: N/A **PROPRIETARY** THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING,
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

DRAWN: JPM 08/24/21 CHECKED:

APPROVED:

MICROWAVE

NON-REFLECTIVE SMA M NON-SHORTING DUST CAP W/ NYLON ROPE ASSEMBLY

В

2911-61009

SEE PDM SEE PDM SCALE: 2:1