




Ø.012±.001 [0.30±0.03]

.037±.002 [0.94±0.05]

 $\emptyset.057[1.45]$ **BODY ID**



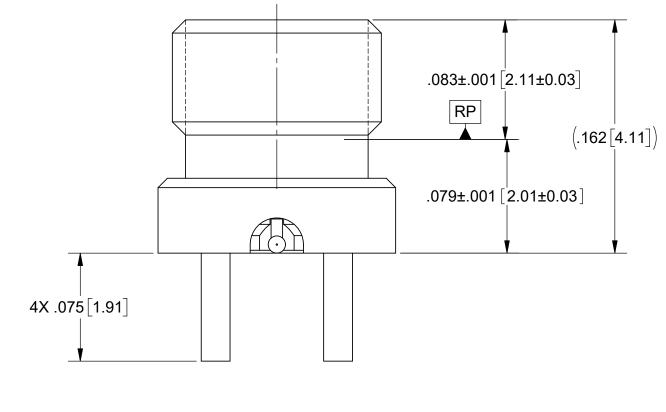

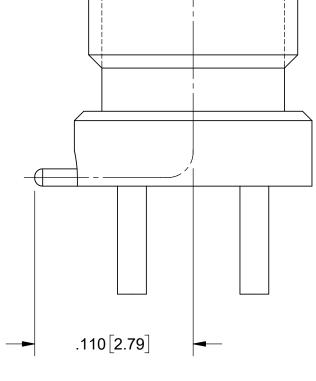

NOTES:

1. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

MATERIAL:

BODY: STAINLESS STEEL

CONTACT: **BERYLLIUM COPPER**


INSULATOR: TORLON

FINISH:

BODY & CONTACT: GOLD OVER NICKEL

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 40.0 GHz.



DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

 $\emptyset.165[4.19]$

□.085 [2.16]

-4X Ø .020 [0.51]

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

RD ANGLE PROJECTION	DRAWN:	DTL 07/09
	CHECKED:	STW 07/0
	APPROVED:	STW 07/0

MICROWAVE UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING, 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R. 7) REMOVE ALL BURRS


THREADED MALE SMPM **SMOOTH BORE PCB MOUNT**

SIZE B	DWG. NO.	3211-6	0298
_			

09/20 /09/20 /09/20 SHEET 1 OF 2 ROHS COMPLIANT

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
	SEE SHEET 1			

RECOMMENDED PCB MECHANICAL FOOTPRINT

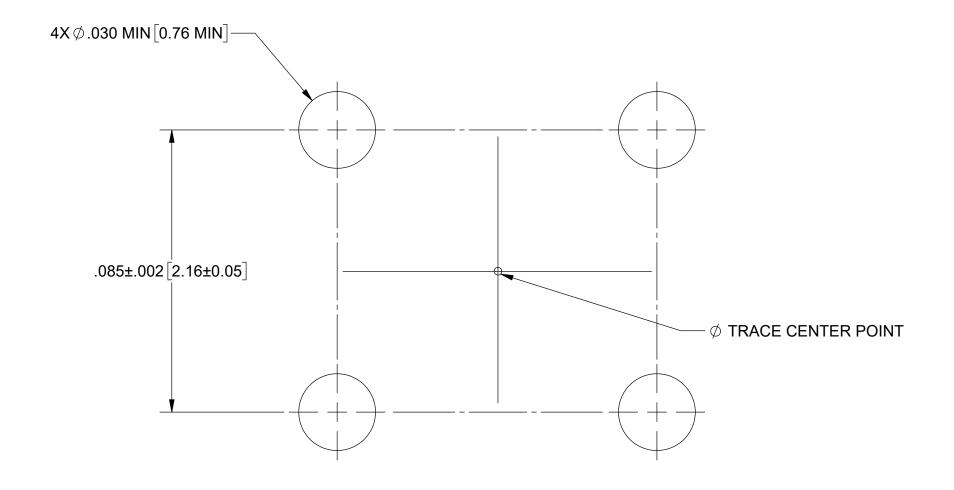

MATERIAL: SEE SHEET 1		
FINISH: SE	E SHEET 1	
SURFACE AREA: N/A		
PROPRIETARY		
IS THE SOLE PROPER		

ANGULAR: X* ±1*0'
X*X' ±15'

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 15T & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC
WITHIN T.I.R
7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION DRAWN: SEE SHEET 1
CHECKED:

APPROVED:



THREADED MALE SMPM SMOOTH BORE PCB MOUNT