






REVSIONS		DESCRIPTION\PER REQUEST\DATE
ISS	ZONE	
D	B-8	NO.12 WAS CHANGED\RD--DM91091701L\11-12-02'
E	B-8	NO.12 WAS CHANGED\RD--DM92031101L\03-11-03'
F	B-8	NO.12 WAS CHANGED\RD--DM92032701L\03-27-03'

CABLE	NO.	A	B	C
RG-58A/U, 58c/U		8.3	1.7	3
RG-174/U, 188A/U		5.2	2.8	3
316/U				





- * RG-58A/U, 58c/U
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .042"
- * RG-174/U, 188A/U, 316/U
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN
ADJUST TO 4 POSITIONER K727

(建議剝線尺寸)

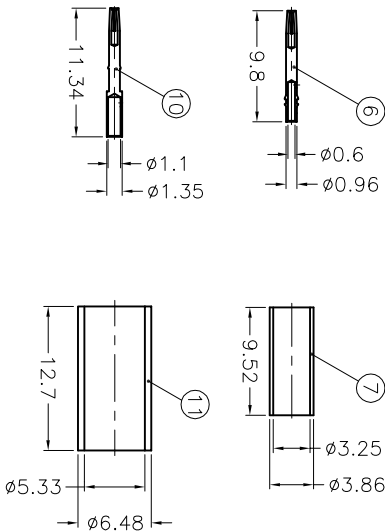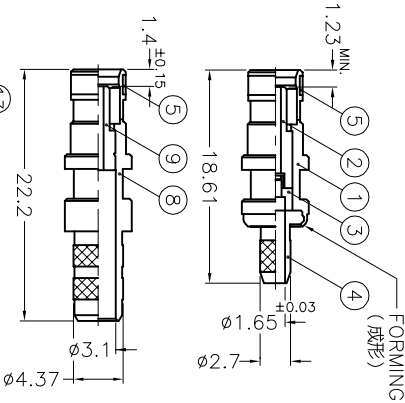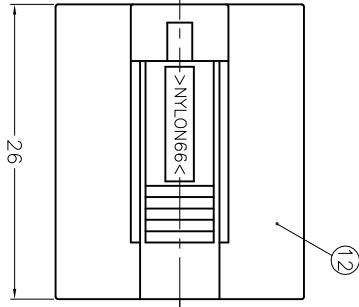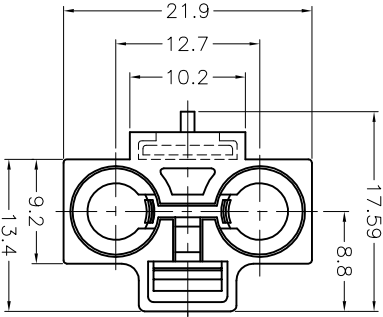

DATE MARK
(日期記號)



TABLE

KEY CODING	PART NO.	DRAWING NO.	ITEM NO.	LOCK COVER
A	FA2-NASJ-C00-6	FKT6121AW-011-NT30G-50	FK7121ADAA1NC5F	FKLC20701B
B	FA2-NBSJ-C00-6	FKT6121BW-011-NT30G-50	FK7121ADBA1NC5F	FKLC20702B
C	FA2-NCSJ-C00-6	FKT6121CW-011-NT30G-50	FK7121ADCA1NC5F	FKLC20703B
D	FA2-ND SJ-C00-6	FKT6121DW-011-NT30G-50	FK7121ADDA1NC5F	FKLC20704B
E	FA2-NESJ-C00-6	FKT6121EW-011-NT30G-50	FK7121ADEA1NC5F	FKLC20705B
F	FA2-NFSJ-C00-6	FKT6121FW-011-NT30G-50	FK7121ADFA1NC5F	FKLC20706B
G	FA2-NS SJ-C00-6	FKT6121GW-011-NT30G-50	FK7121ADGA1NC5F	FKLC20707B
H	FA2-NHSJ-C00-6	FKT6121HW-011-NT30G-50	FK7121ADHA1NC5F	FKLC20708B
I	FA2-NISJ-C00-6	FKT6121IW-011-NT30G-50	FK7121ADIA1NC5F	FKLC20709B
K	FA2-NKSJ-C00-6	FKT6121KW-011-NT30G-50	FK7121ADKA1NC5F	FKLC20710B
Z	FA2-NSJ-C00-6	FKT6121ZW-011-NT30G-50	FK7121ADZA1NC5F	FKLC20711B

Amphenol

Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.
FA2-NXSJ-C00-6
APPROVED
DATE
03-27-03'

TITLE
FAKRA TWIN SMB CRIMP JACK W/180° DELPHI CLIP
DRAWING NO.
FKT6121XX-011-NT30G-50

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626, ALLOY 360, 1/2 H
: JIS H3250, C, 3604BD, OR EQUIVALENT
 2. BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, 1/2 H
: FUJII FX301 OR EQUIVALENT
 3. NICKEL PL., 60 MIN. THICK OVER COPPER STRIKE
OVER COPPER STRIKE
 4. GOLD PL., 30 MIN. THICK OVER NICKEL PL., 100 MIN. THICK
OVER COPPER STRIKE
 5. TEFION MIL-P-19468 OR EQUIVALENT
 6. COPPER PER ASTM B-75 ALLOY C12200 OR EQUIVALENT
 7. NYLOY66(WITH 33% GLASS FIBER) PER NYTEX COMPOSITES CO., LTD.
 8. PBT(WITH 15% GLASS FIBER) PER CHANG CHUN GRADE 4115202 OR EQUIVALENT

13	LOCK COVER	NOTE 8	NATURAL	2	FKLC00001A
12	LOCK COVER	NOTE 7		1	SEE TABLE
11	FERRULE	NOTE 6	NOTE 3	1	FKFR00201A
10	CONTACT PIN	NOTE 2	NOTE 4	1	FKCP00401A
9	INSULATOR	NOTE 5	NATURAL	1	FKNS00501A
8	BODY	NOTE 1	NOTE 3	1	FKBD00501A
7	FERRULE	NOTE 6	NOTE 3	1	FKFR00101A
6	CONTACT PIN	NOTE 2	NOTE 4	1	FKCP00201A
5	RETAINER RING	NOTE 2	NATURAL	2	FKRR00101A
4	BARREL	NOTE 1	NOTE 3	1	FKBR00101B
3	INSULATOR	NOTE 5	NATURAL	1	FKNS00201A
2	INSULATOR	NOTE 5	NATURAL	1	FKNS00301A
1	BODY	NOTE 1	NOTE 3	1	FKBD00301A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

SCALE	1.5/1	ISSUE	F	FILE NO.	F:\DWG\FKT\6121XX\011\50\NT30G-F
-------	-------	-------	---	----------	----------------------------------

CHECKED	DATE	03-27-03'
DRAWN	DATE	03-27-03'

ITEM NO.	FK7121ADXA1NC5F
----------	-----------------